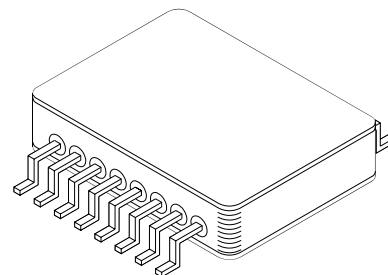
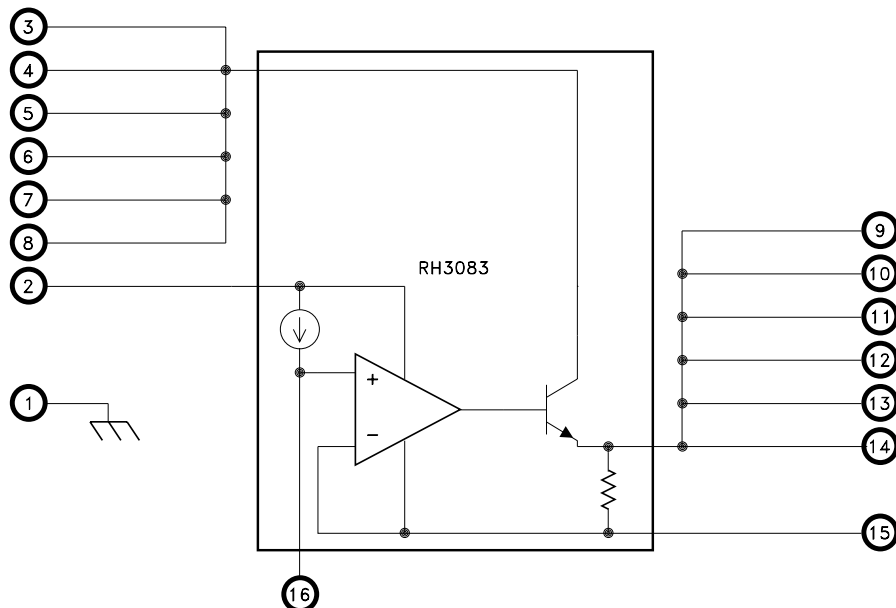


Anaren®
MSK PRODUCTS
**RAD HARD POSITIVE,
 2.25A, LDO, SINGLE RESISTOR
 ADJ VOLTAGE REGULATOR**
5983RH
FEATURES:

- Manufactured using  Space Qualified RH3083 Die
- MIL-PRF-38534 Class K Processing & Screening
- Total Dose Hardened to TBD Krads(Si) (Method 1019.7 Condition A)
- Low Dropout to 310mV (VIN - VOUT, with Separate Control Supply)
- Output Adjustable to Zero Volts
- Internal Short Circuit Current Limit
- Output Voltage is Adjustable with 1 External Resistor
- Output Current Capability to 2.25A
- Internal Thermal Overload Protection
- Outputs may be Paralleled for Higher Current
- Available in Straight or Gull Wing Lead Form
- Contact MSK for MIL-PRF-38534 Qualification and Radiation Status


DESCRIPTION:

The MSK5983RH offers low dropout down to 310mV and an output voltage range down to zero volts while offering radiation tolerance for space applications. This, combined with the low θ_{JC} , allows increased output current while providing exceptional device efficiency. Output voltage is selected by the user through the use of 1 external resistor. Additionally, the regulator offers internal short circuit current and thermal limiting, which allows circuit protection and eliminates the need for external components and excessive derating. The MSK5983RH is hermetically sealed in a 16 pin flatpack, and is available with straight or gull wing lead form.

EQUIVALENT SCHEMATIC

TYPICAL APPLICATIONS

- High Efficiency Linear Regulators
- Constant Voltage/Current Regulators
- Space System Power Supplies
- Switching Power Supply Post Regulators
- Very low Voltage Power Supplies

PIN-OUT INFORMATION

1 CASE	16 SET
2 CONTROL	15 SENSE
3 VINA	14 VOUTA
4 VINB	13 VOUTB
5 VINC	12 VOUTC
6 VIND	11 VOUTD
7 VINE	10 VOUTE
8 VINF	9 VOUTF

CASE=ISOLATED

ABSOLUTE MAXIMUM RATINGS

⑩

V _{IN}	Input Voltage..... ^⑦	+18V, -0.3V	P _D	Power Dissipation.....	Internally Limited
	No Overload or Short..... ^⑦	+23V, -0.3V	T _J	Junction Temperature	+150°C
V _{CONTROL}	Control Pin Voltage.....	+/-28V	T _{ST}	Storage Temperature Range.....	-65°C to +150°C
I _{OUT}	Output Current	3.0A	T _{LD}	Lead Temperature Range	
I _{SET}	Set Pin Current..... ^⑧	+/-25mA		(10 Seconds).....	300°C
V _{SET}	Set Pin Voltage..... ^⑦	+/-10V	T _C	Case Operating Temperature	
				MSK5983RH	-40°C to +85°C
				MSK5983K/H RH	-55°C to +125°C
				ESD Rating	CLASS 2

ELECTRICAL SPECIFICATIONS

Parameter	Test Conditions ① ⑪				Group A Subgroup	MSK5983K/H RH			MSK5983RH			Units
						Min.	Typ.	Max.	Min.	Typ.	Max.	
Set Pin Current (I _{SET})	V _{CONTROL} =V _{IN} =3.0V	V _{OUT} =1.0V	5mA≤I _{LOAD} ≤2.25A		1	49.5	50	50.5	49.5	50	50.5	uA
				Post Radiation	2,3	49	—	51.5	—	—	—	uA
				1	49	—	51	49	—	51	uA	
Output Offset Voltage (V _{OS})	V _{CONTROL} =V _{IN} =3.0V	V _{OUT} =1.0V	I _{LOAD} =5mA		1	-4.5	0	4.5	-4.5	0	4.5	mV
				2,3	-6	—	6	—	—	—	mV	
Load Regulation	V _{CONTROL} =V _{IN} =3.0V	V _{OUT} =0V	5mA≤I _{LOAD} ≤2.25A	(Δ V _{OS})	1,2,3	-4	—	4	-4	—	4	mV
				(Δ I _{SET})	1,2,3	-300	-50	+300	-300	-50	+300	nA
				(Δ V _{OS}) SENSE PIN=NC	1,2,3	—	8.8	—	—	8.8	—	mV
Line Regulation	ΔV _{IN} =2V TO 24V	ΔV _{CONTROL} =3V TO 24V	V _{OUT} =0V	(Δ V _{OS})	1,2,3	-0.05	—	0.05	-0.05	—	0.05	mV/V
				(Δ I _{SET})	1,2,3	-10	2	+10	-10	2	+10	nA/V
VIN Dropout Voltage	V _{OUT} =1.0V	I _{LOAD} =2.25A	V _{CONTROL} =3.0V		1	—	0.275	700	—	0.275	700	mV
				2,3	—	—	800	—	—	—	mV	
Control Pin Dropout Voltage	V _{OUT} =1.0V	I _{LOAD} =2.25A	V _{IN} =3.0V		1	—	1.25	1.55	—	1.25	1.55	V
				2,3	—	—	1.65	—	—	—	V	
Control Pin Current	V _{IN} =2.0V	V _{OUT} =1.0V	I _{LOAD} =100mA	1,2,3	—	5.5	11	—	5.5	11	mA	
			I _{LOAD} =2.25A	1,2,3	—	50	100	—	50	100	mA	
Current Limit ⑨	V _{CONTROL} =V _{IN} =5.0V	V _{OUT} =1.0V	SENSE PIN=NC	1,2,3	2.25	2.7	—	2.25	2.7	—	A	
				1	—	3.2	—	—	3.2	—	A	
Minimum Load Current ⑥	V _{CONTROL} =V _{IN} =23V				—	—	—	1	—	—	1	mA
Ripple Rejection ②	F=120Hz	Δ V _{IN} =0.5Vpp	I _{OUT} =0.1A	C _{SET} =0.1uF	—	—	85	—	—	85	—	dB
Output Noise ②	V _{IN} =V _{CONTROL} =3V, I _{OUT} =500mA				—	—	40	—	—	40	—	uVRMS
	10Hz to 100KHz											
Thermal Resistance ②	Junction to Case @125°C				—	—	3.1	3.5	—	3.1	3.5	°C/W


NOTES:

- ① Output is decoupled to ground using a 220μF tantalum low ESR capacitor in parallel with 3 pieces of 1.0μF and one 0.1μF ceramic capacitor unless otherwise specified. Sense pin connected to V_{OUT} unless otherwise specified. (See Figure 1)
- ② Guaranteed by design but not tested. Typical parameters are representative of actual device performance but are for reference only.
- ③ Industrial grade devices shall be tested to subgroup 1 unless otherwise specified.
- ④ Class H and K devices shall be 100% tested to subgroups 1,2 and 3.
- ⑤ Subgroup 1 T_A=T_C=+25°C
Subgroup 2 T_A=T_C=+125°C
Subgroup 3 T_A=T_C=-55°C
- ⑥ Minimum load current verified while testing line regulation.
- ⑦ Voltage is measured with respect to V_{OUT}.
- ⑧ Set pin is clamped to V_{OUT} with diodes in series with 1KΩ resistors. Current will flow under transient conditions.
- ⑨ Reference the current limit typical performance curve for output current capability versus voltage drop.
- ⑩ Continuous operation at or above absolute maximum ratings may adversely effect the device performance and/or life cycle.
- ⑪ Pre and Post irradiation limits at 25°C, up to TBD Krad(Si) TID, are identical unless otherwise specified.

APPLICATION NOTES

OUTPUT VOLTAGE

A single resistor (RSET) from the SET pin to ground creates the reference voltage for the internal Error Amplifier. The MSK5983RH SET pin supplies a constant current of 50uA that develops the reference voltage. The output voltage is simply $RSET \times 50\mu A$. Since the output is internally driven by a unity-gain amplifier, an alternative to using RSET is to connect a high quality reference source to the SET pin. With a minimum load requirement of 1mA on the Output, the Output Voltage can be adjusted to near 0V. To bring the output voltage to 0V, the load must be connected to a slightly negative voltage supply to sink the 1mA minimum load current from a 0V output.

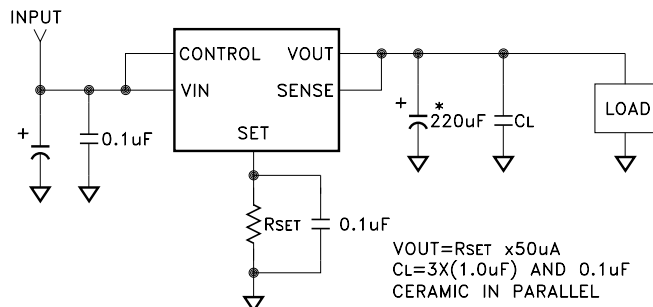

* TAZH227K010L

FIGURE 1

INPUT CAPACITANCE

Pins 3-8 are the connection to the collector of the power device of the MSK5983RH. Output load current is supplied through these pins. Minimum input capacitance for these devices is 10uF. Low ESR, ceramic input capacitors are acceptable for applications without long input leads. For applications with long input leads, the self inductance of the wires can cause instability. Care must be taken to minimize the inductance of the input wires. This can be accomplished through the use of series resistance or higher ESR input capacitors. A minimum of 10uF of low ESR tantalum bulk capacitance in parallel with low value ceramic decoupling capacitance is recommended.

CONTROL PIN

The control pin is the bias supply for the control circuitry of the MSK5983RH. Minimum input capacitance on the control pin is 2.2uF. Approximately 1.7% of the output current flows into this pin. For proper regulation, the control pin voltage must be 1.6V greater than the output voltage. (See Control Dropout Voltage Specification).

OUTPUT CAPACITANCE

For stability purposes, the MSK5983RH requires a minimum output capacitor of 10uF with an ESR of 0.5Ω or less. Tantalum or ceramic capacitors are recommended. A larger capacitance value will improve transient response for increased load current changes. Consideration must also be given to temperature characteristics of the capacitors used.

LOW DROPOUT OPERATION

Using separate VIN and CONTROL power supplies allows for lower dropout and improved efficiency. Figure 2 shows the MSK5978RH output transistor collector is connected to the VIN pin. The regulator control circuitry is powered by the CONTROL input. The dropout of the regulator is determined by the saturation voltage of the output transistor, typical 300mV at 2.25A ILOAD. The CONTROL supply must supply the base drive current for the output transistor. The CONTROL current minus the 50uA SET current is supplied to the load. See the Typical Performance Characteristics curves for expected VIN dropout voltage, CONTROL pin dropout voltage and current requirements under various conditions. With separate supplies for VIN and CONTROL, power dissipation is reduced and efficiency improves.

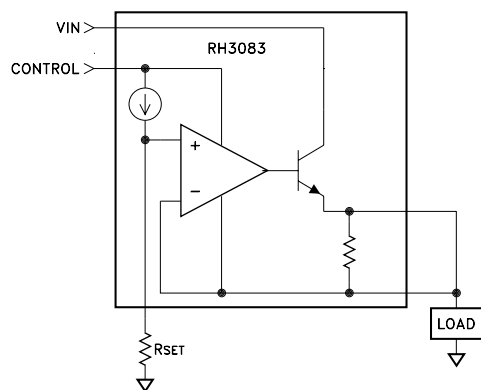


FIGURE 2

ADDITIONAL STABILITY

A capacitor placed in parallel with the SET pin resistor to ground, will improve the output transient response and filter noise in the system. To reduce output noise, typically 500-1000pF is required. Capacitors up to 1uF can be used, however consideration must be given to the effect the time constant created will have on the startup time.

LOAD REGULATION

The MSK5983RH specified load regulation is Kelvin Sensed, therefore the parasitic resistance of the system must be considered to design an acceptable load regulation. The overall load regulation includes the specified MSK5983RH load regulation plus the parasitic resistance multiplied by the load current as shown in Figure 3. RSO is the series resistance of all conductors between the MSK5983RH output and the load. It will directly increase output load regulation error by a voltage drop of $\Delta I_O \times RSO$. RSS is the series resistance between the SET pin and the load. RSS will have little effect on load regulation if the SET pin trace is connected as close to the load as possible keeping the load return current on a separate trace as shown. RSR is the series resistance of all of the conductors between the load and the input power source return. RSR will not effect load regulation if the SET pin is connected with a Kelvin Sense type connection as shown in Figure 3, but it will increase the effective dropout voltage by a factor of $I_O \times RSR$. Keeping RSO and RSR as low as possible will ensure minimal voltage drops and wasted power.

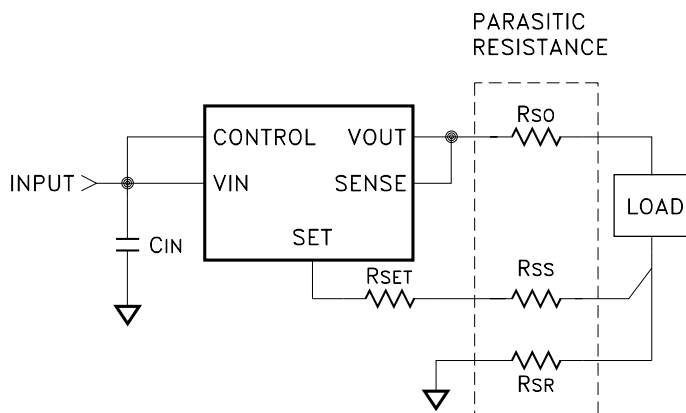


FIGURE 3

OUTPUT CURRENT/CURRENT LIMIT

Available output current and current limit values have been derived from the MSK5983RH which assumes a lead length of approximately 0.1 inch. Increased lead length will decrease current limit due to lead resistance. This is especially important to note with use of the MSK5983RH, which allows the potential for lead lengths to exceed 0.1 inch.

PARALLELING DEVICES

When currents greater than 2.25A are needed, the MSK5983RH's may be paralleled to multiply the current capacity. As shown in Figure 4, the VIN and SET pins must be tied together. The VOUT pins are connected to the load with consideration to the conductor resistance. The conductor resistance of each MSK5983RH VOUT connection to the load, must be equal to create equal load sharing. As little as 10mΩ ballast resistance typically ensures better than 80% equal sharing of load current at full load. Additional consideration must be given to the effect the additional VOUT conductor resistance has on load regulation; see paragraph titled "Load Regulation".

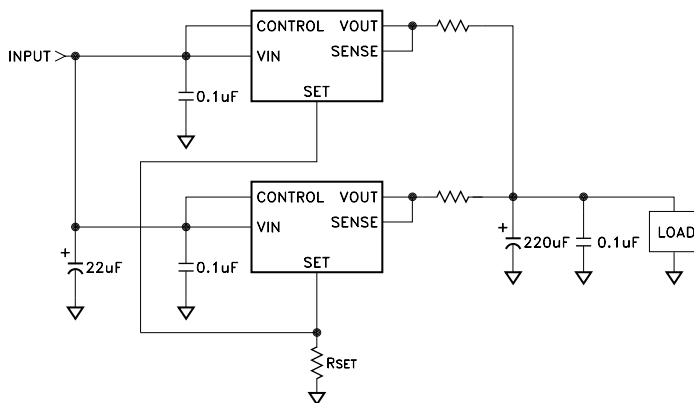


FIGURE 4

IMPROVING INITIAL ACCURACY AND REDUCING TEMPERATURE DRIFT

The initial output accuracy of the MSK5983RH due to SET pin current tolerance and set point resistor accuracy can be reduced to 0.2% using the MSK109RH radiation hardened precision reference. Minimal drift of the MSK109RH from temperature extremes and irradiation ensure very tight regulation. The circuit can be configured to use the 2.5V reference to directly set the output at 2.5V or with a slight variation it can provide any output within the operating range of the MSK5983RH down to 0V output. Select RS to maintain between 1mA and 10mA of current through the reference; see Figure 5 below. RS may be tied to VIN or another power source. The optional trim resistor can be used to further trim out initial output and system error. Reference the MSK109RH data sheet for application circuits that provide stable output voltages across the full operating range of the MSK5983RH including down to 0V output and the operating characteristics of the MSK109RH.

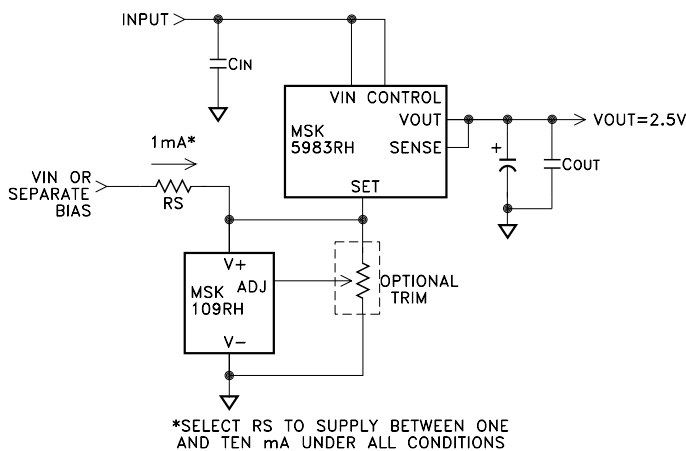


FIGURE 5

ADDING SHUTDOWN

The MSK5983RH can be easily shutdown by either reducing RSET to 0Ω or connecting a transistor from the SET pin to ground. By connecting two transistors, as shown in Figure 6, a low current voltage source is all that is required to take the SET pin to ground as well as pull the output voltage to ground. Q2 pulls the output voltage to ground when no load is present and only needs to sink 10mA.

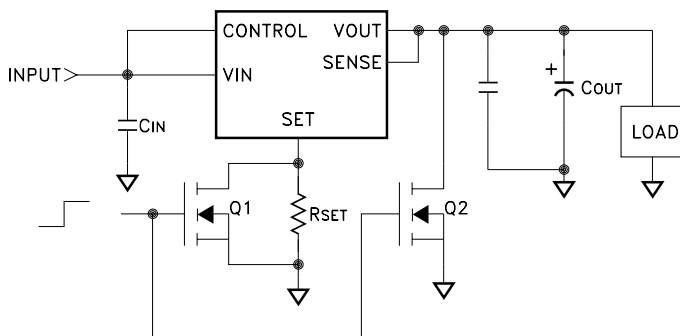


FIGURE 6

HEAT SINKING

To determine if a heat sink is required for your application and if so, what type, refer to the thermal model and governing equation below.

$$\text{Governing Equation: } T_J = P_D \times (R_{\theta JC} + R_{\theta CS} + R_{\theta SA}) + T_A$$

WHERE

T_J = Junction Temperature
 P_D = Total Power Dissipation
 $R_{\theta JC}$ = Junction to Case Thermal Resistance
 $R_{\theta CS}$ = Case to Heat Sink Thermal Resistance
 $R_{\theta SA}$ = Heat Sink to Ambient Thermal Resistance
 T_C = Case Temperature
 T_A = Ambient Temperature
 T_S = Heat Sink Temperature

EXAMPLE:

This example demonstrates the thermal calculations for the regulator operating at 1.5A output current.

Conditions for MSK5983RH:

$$V_{\text{CONTROL}} = V_{\text{IN}} = +3.0\text{V}; I_{\text{OUT}} = +1.5\text{A } V_{\text{OUT}} = +1.0\text{V}$$

- 1.) Assume 45° heat spreading model.
- 2.) Find regulator power dissipation:

$$\begin{aligned} P_D &= (V_{\text{IN}} - V_{\text{OUT}})(I_{\text{OUT}}) \\ P_D &= (3-1)(1.50) \\ &= 3.0\text{W} \end{aligned}$$

- 3.) For conservative design, set $T_J = +125^\circ\text{C}$ Max.
- 4.) For this example, worst case $T_A = +90^\circ\text{C}$.
- 5.) $R_{\theta JC} = 3.5^\circ\text{C/W}$ from the Electrical Specification Table.
- 6.) $R_{\theta CS} = 0.15^\circ\text{C/W}$ for most thermal greases.
- 7.) Rearrange governing equation to solve for $R_{\theta SA}$:

$$\begin{aligned} R_{\theta SA} &= (T_J - T_A)/P_D - (R_{\theta JC}) - (R_{\theta CS}) \\ &= (125^\circ\text{C} - 90^\circ\text{C})/3.0\text{W} - 3.5^\circ\text{C/W} - 0.15^\circ\text{C/W} \\ &= 8.0^\circ\text{C/W} \end{aligned}$$

In this case the result is 8.0°C/W. Therefore, a heat sink with a thermal resistance of no more than 8.0°C/W must be used in this application to maintain regulator circuit junction temperature under 125°C.

TOTAL DOSE RADIATION TEST PERFORMANCE


Radiation performance curves for TID testing will be generated for all radiation testing performed by MS Kennedy. These curves show performance trends throughout the TID test process and can be located in the MSK5983RH radiation test report. The complete radiation test report will be available in the RAD HARD PRODUCTS section on the MSK website.

ADDITIONAL APPLICATION INFORMATION


For additional applications information, please reference Linear Technology Corporation's® LT3083 and RH3083 data sheets.

TYPICAL PERFORMANCE CURVES


SET PIN CURRENT

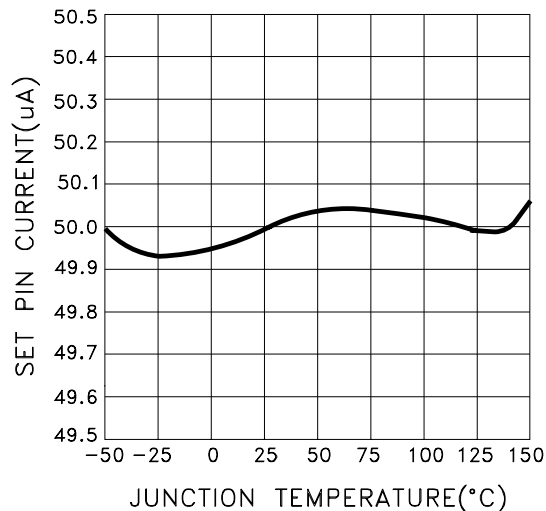


OFFSET VOLTAGE ($V_{OUT}-V_{SET}$)

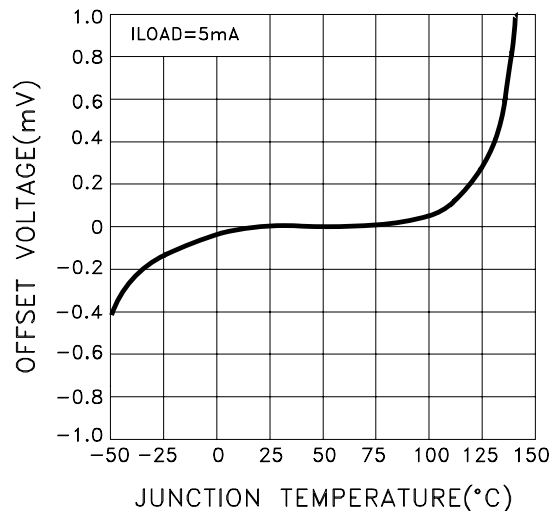


LOAD REGULATION

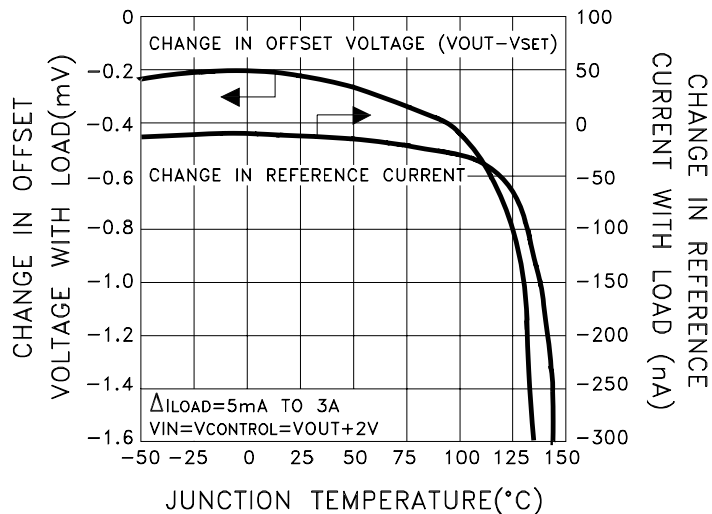


CURRENT LIMIT

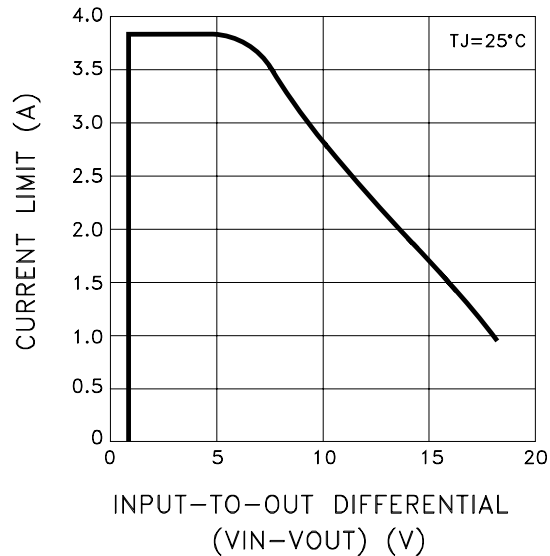






RIPPLE REJECTION (120Hz)

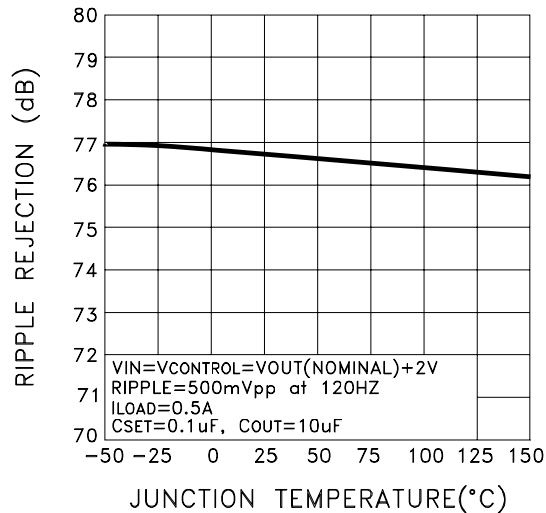


V_{IN} DROPOUT VOLTAGE

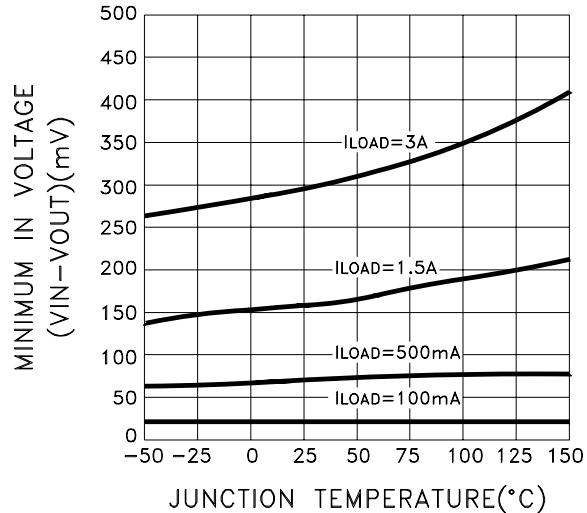

TYPICAL PERFORMANCE CURVES CONT'D

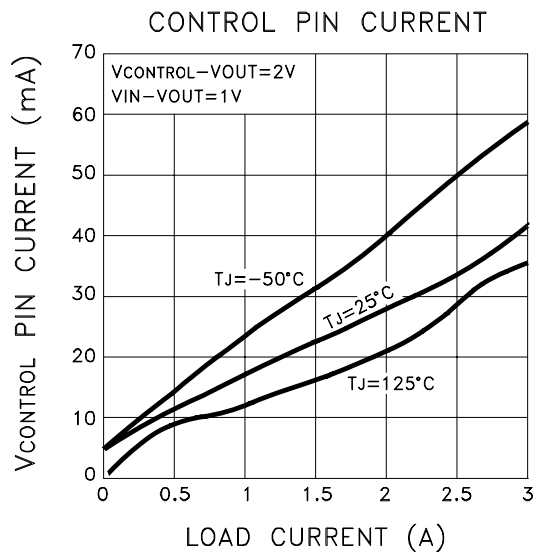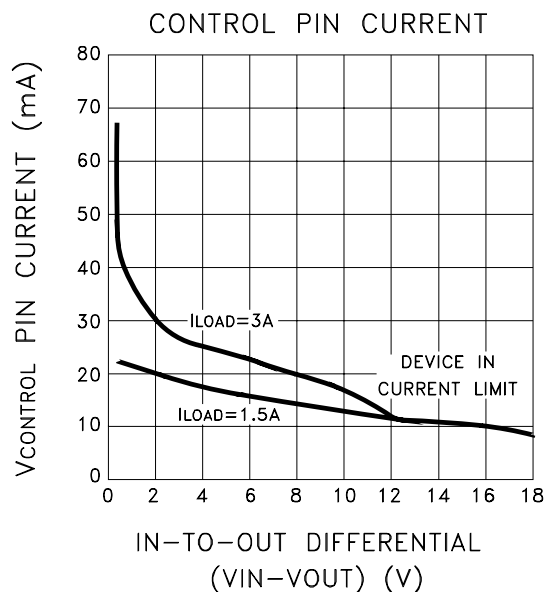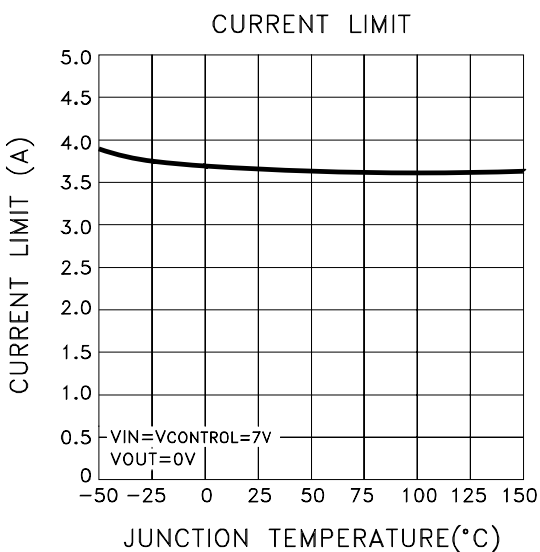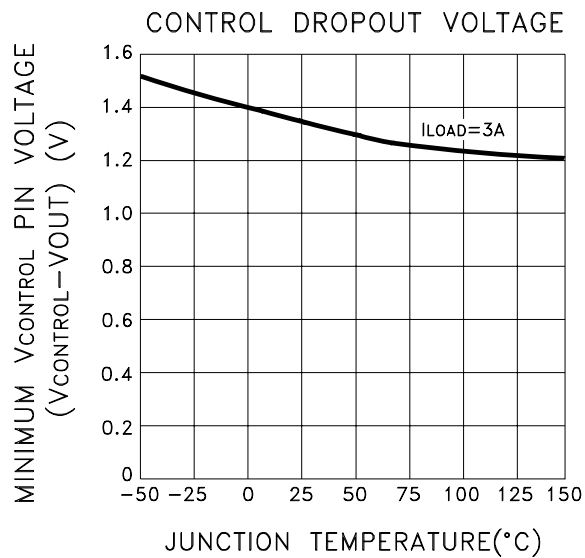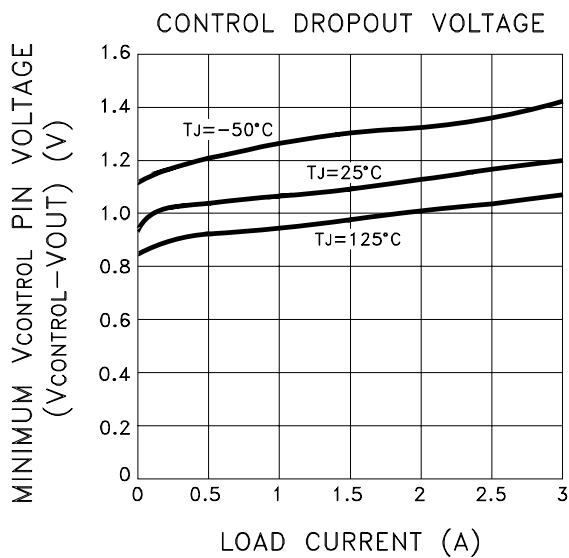

MECHANICAL SPECIFICATIONS

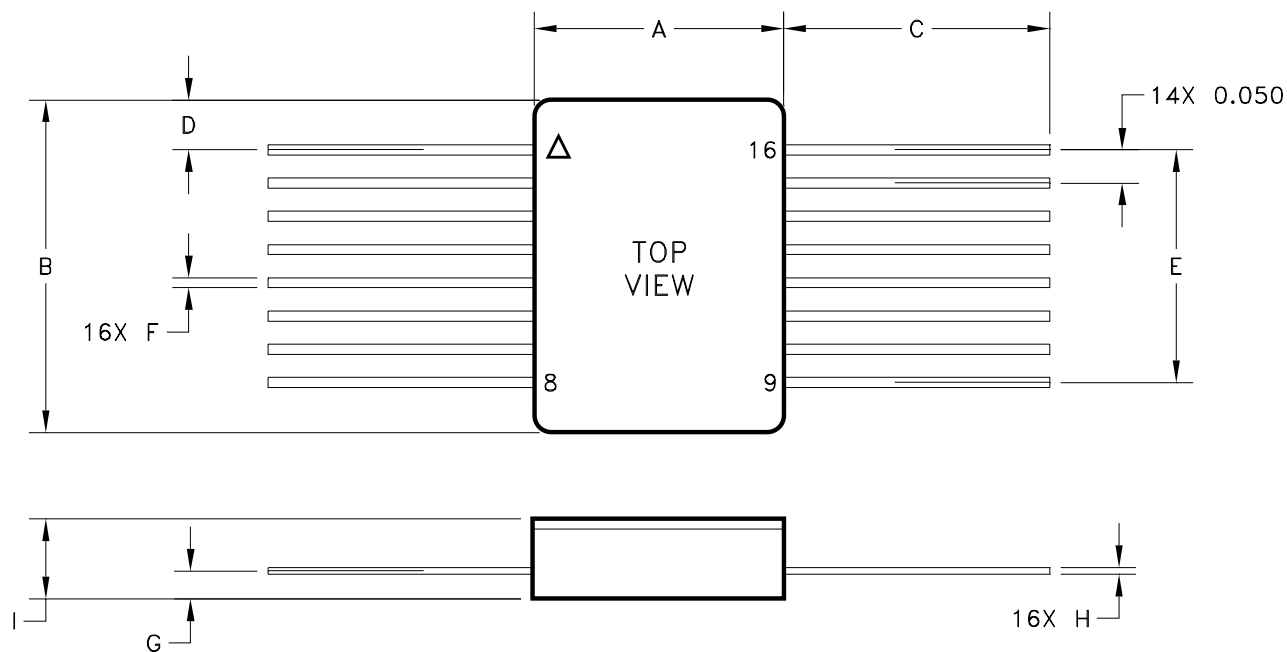

REF	MIN	MAX
A	0.365	0.385
B	0.490	0.510
C	0.400	
D	0.075 REF	
E	0.345	0.355
F	0.012	0.018
G	0.032	0.052
H	0.008	0.012
I		0.115

ESD TRIANGLE INDICATES PIN 1
WEIGHT=1.5 GRAMS TYPICAL

ALL DIMENSIONS ARE SPECIFIED IN INCHES


ORDERING INFORMATION

MSK5983 **K** **RH**

LEAD CONFIGURATIONS
BLANK= STRAIGHT
RADIATION HARDENED
SCREENING
BLANK= INDUSTRIAL
K=MIL-PRF-38534 CLASS K;
H=MIL-PRF-38534 CLASS H
GENERAL PART NUMBER


The above example is a Class K regulator with straight leads.

MECHANICAL SPECIFICATIONS

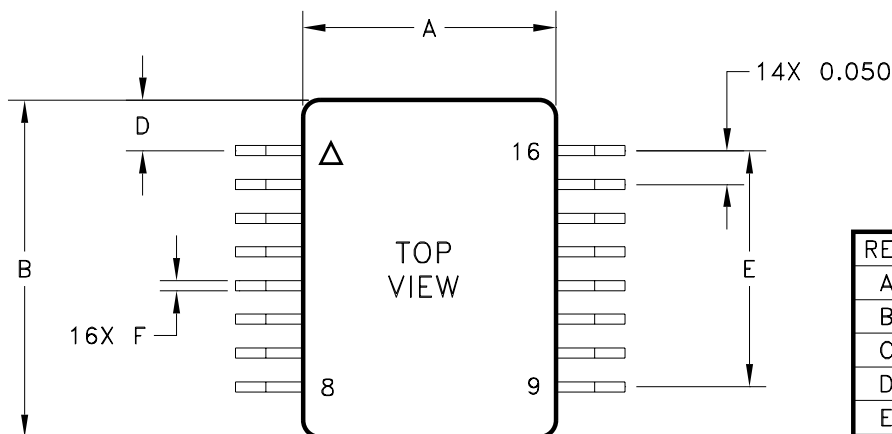

REF	MIN	MAX
A	0.365	0.385
B	0.490	0.510
C	0.045	0.055
D	0.075 REF	
E	0.345	0.355
F	0.012	0.018
G	0.050 REF	
H	0.008	0.012
I	—	0.115
J	0.008	0.018
K	0.550	0.600

NOTE: "J" IS MEASURED FROM
BOTTOM OF PIN TO
BOTTOM OF CASE.

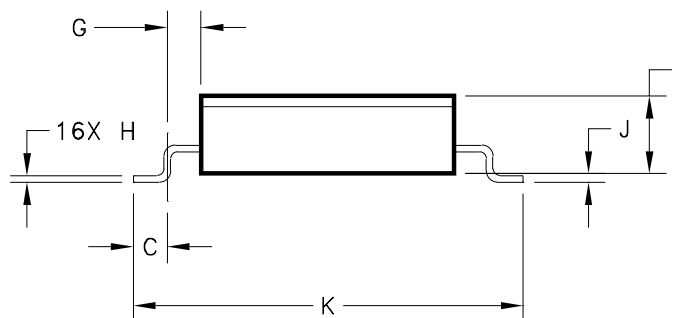

ESD TRIANGLE INDICATES PIN 1
WEIGHT=1.5 GRAMS TYPICAL

ALL DIMENSIONS ARE SPECIFIED IN INCHES

ORDERING INFORMATION

MSK5983 K RH G

LEAD CONFIGURATIONS
G=GULL WING

RADIATION HARDENED

SCREENING
BLANK= INDUSTRIAL
K=MIL-PRF-38534 CLASS K;
H=MIL-PRF-38534 CLASS H

GENERAL PART NUMBER

The above example is a Class K regulator with gull wing lead form.

REVISION HISTORY

REV	STATUS	DATE	DESCRIPTION
-	Preliminary	01/14	Initial Release
A	Preliminary	01/14	Add clarifications for block diagram, electrical specifications, max ratings and applications section
B	Preliminary	03/14	Add clarifications, electrical specifications
C	Preliminary	08/14	Update electrical specifications
D	Preliminary	01/15	Update electrical specifications
E	Preliminary	12/17	Add ESD rating

ANAREN, MSK Products
www.anaren.com/msk

The information contained herein is believed to be accurate at the time of printing. Anaren, MSK products reserves the right to make changes to its products or specifications without notice, however and assumes no liability for the use of its products.

Please visit our website for the most recent revision of this datasheet.

Contact Anaren, MSK Products for MIL-PRF-38534 Class H, Class K qualification and radiation status.