


Features

Bi-color LED lamp
White diffused lens
Low current requirements
Reliable and rugged
IC compatible

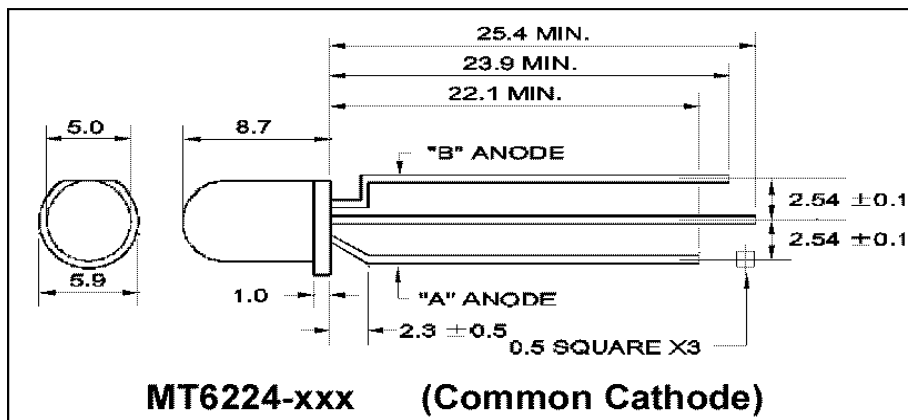

Series Line-Up

Part Number	Color	Material
MT6224-HRG	High Efficiency Red	GaAsP
	Yellow Green	GaP
MT6224-RG	Red	GaP
	Yellow Green	GaP
MT6224-YG	Pure Yellow	GaAsP
	Yellow Green	GaP

Maximum Ratings (Ta=25°C)

Part Number	Forward Current I _F	Reverse Voltage V _R	Power Dissipation P _D	Operating Temperature T _{opr}	Storage Temperature T _{stg}
MT6224-HRG	30	5	85.00	-25 ~ +85	-25 ~ +100
	30	5	85.00	-25 ~ +85	-25 ~ +100
MT6224-RG	30	5	85.00	-25 ~ +85	-25 ~ +100
	30	5	85.00	-25 ~ +85	-25 ~ +100
MT6224-YG	30	5	85.00	-25 ~ +85	-25 ~ +100
	30	5	85.00	-25 ~ +85	-25 ~ +100
Unit	mA	V	mW	°C	°C

Company Headquarters
3 Northway Lane North
Latham, New York 12110
Toll free: 1.800.984.5337
Fax: 518.785.4725

Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λ_P	Material	View Angle $2\theta_{1/2}$	Luminous Intensity I_v				Forward Voltage V_F				Rev Current I_R	
				min.	typ.	max.	IF@	min.	typ.	max.	IF@	max.	VR@
MT6224-HRG	635	GaAsP	70°	–	11.70	–	20mA	–	2.10	3.00	20mA	100	5V
	567	GaP	70°	–	10.10	–	20mA	–	2.10	3.00	20mA	100	5V
MT6224-RG	700	GaP	70°	–	2.00	–	20mA	–	2.10	3.00	20mA	100	5V
	567	GaP	70°	–	10.10	–	20mA	–	2.10	3.00	20mA	100	5V
MT6224-YG	585	GaAsP	70°	–	8.30	–	20mA	–	2.10	3.00	20mA	100	5V
	567	GaP	70°	–	10.10	–	20mA	–	2.10	3.00	20mA	100	5V
–	nm	–	deg	mcd				V				μA	–

NOTES:

- All Dimensions are in millimeters.
- Tolerance is ± 0.25 mm unless otherwise stated.
- An Epoxy Meniscus may extend about 1mm down the leads.
- Burr around bottom of epoxy may be around 0.5mm MAX.
- Specifications are subject to change without notice.

Company Headquarters

3 Northway Lane North
Latham, New York 12110
Toll free: 1.800.984.5337
Fax: 518.785.4725

Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office

950 South Coast Drive, Suite 225
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314