

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-	7268	RELEASED	11/09/06	

APPROVED: _____

DATE: _____ TITLE: _____

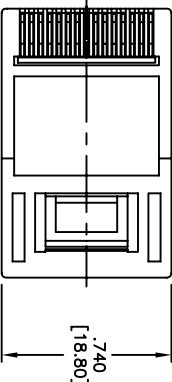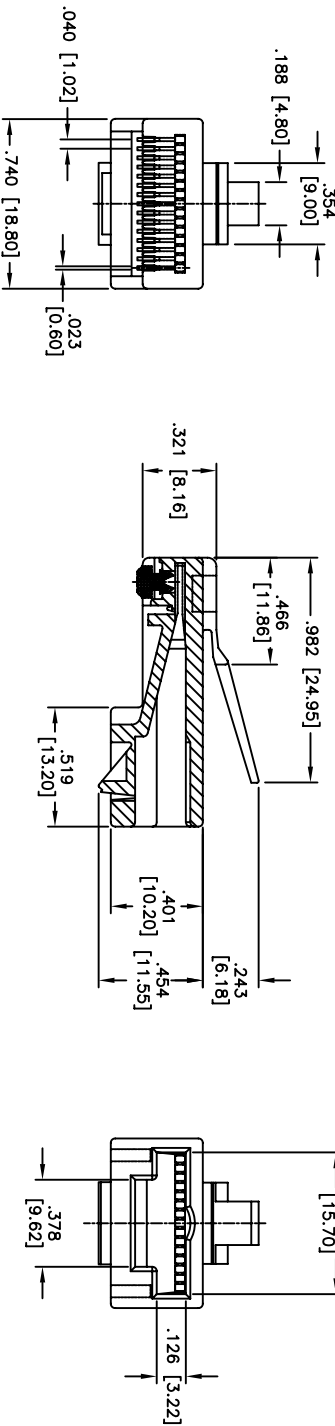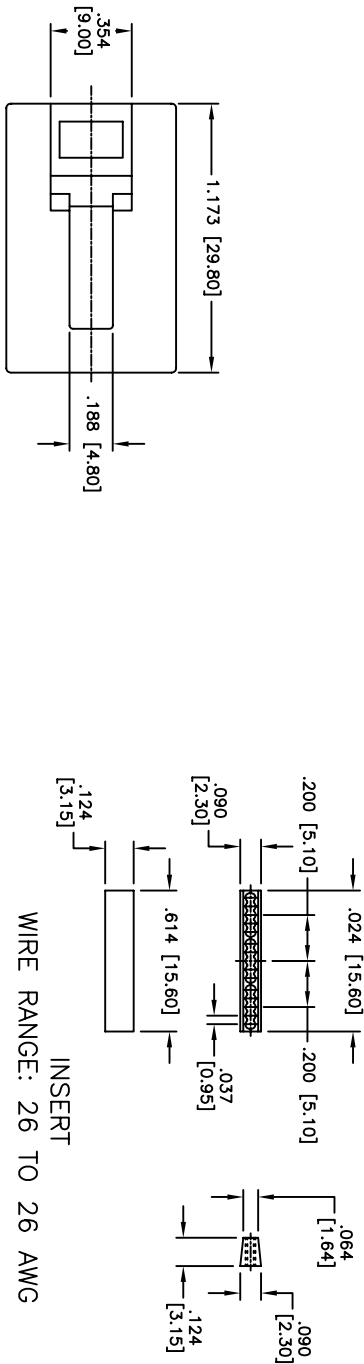

SPECIFICATIONS:

Material:

Insulator: Polycarbonate, rated UL 94V-2

Insulator color: Transparence

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1.5 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MODULAR TELEPHONE PLUG, 15P15C

WITH INSERT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	BW			11/09/06			
CHECKED							
APPROVED							
				SIZE	PART NO.	REV.	
				X	MTP-1515-X	-	
				REF:	SCALE: NTS	SHEET 1 OF 1	