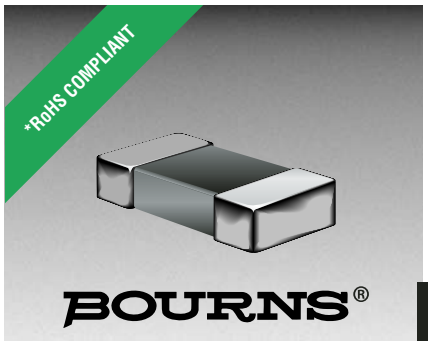


Features

- High resistance to heat and humidity
- Resistance to mechanical shock and pressure
- Accurate dimensions for automatic surface mounting
- Wide impedance range

Applications

- Power supply lines
- IC power lines
- Signal lines

BOURNS®

MG, MU, MZ Series High Impedance Chip Ferrite Beads

Electrical Specifications

Model Number	Impedance (Ω) at 100 MHz	RDC (Ω) Max.	IDC (mA) Max.
MU3261-300Y	30 ±25 %	0.20	500
MU3261-600Y	60 ±25 %	0.20	400
MU3261-750Y	75 ±25 %	0.20	400
MU3261-101Y	100 ±25 %	0.15	500
MU3261-121Y	120 ±25 %	0.15	900
MG3261-151Y	150 ±25 %	0.30	300
MU3261-221Y	220 ±25 %	0.35	700
MG3261-301Y	300 ±25 %	0.30	300
MU3261-301Y	300 ±25 %	0.30	300
MU3261-471Y	470 ±25 %	0.35	400
MU3261-601Y	600 ±25 %	0.30	200
MZ3261-601Y	600 ±25 %	0.30	200
MU3261-801Y	800 ±25 %	0.60	300
MU3261-102Y	1000 ±25 %	0.60	100
MZ3261-122Y	1200 ±25 % (at 50 MHz)	0.50	100
MU3261-122Y	1200 ±25 % (at 50 MHz)	0.50	100
MU3261-152Y	1500 ±25 % (at 50 MHz)	0.70	300
MZ3261-202Y	2000 ±25 % (at 30 MHz)	0.60	100
MU3261-202Y	2000 ±25 % (at 30 MHz)	0.60	100
MG2029-100Y	10 ±25 %	0.20	400
MG2029-300Y	30 ±25 %	0.10	400
MG2029-400Y	40 ±25 %	0.20	300
MU2029-600Y	60 ±25 %	0.10	900
MG2029-800Y	80 ±25%	0.20	300
MG2029-101Y	100 ±25 %	0.20	400
MG2029-121Y	120 ±25 %	0.25	300
MU2029-151Y	150 ±25 %	0.20	800
MU2029-221Y	220 ±25 %	0.30	500
MU2029-301Y	300 ±25 %	0.30	500
MU2029-471Y	470 ±25 %	0.35	700
MZ2029-601Y	600 ±25 %	0.40	100
MZ2029-601T	600 ±25 %	0.40	200
MZ2029-102Y	1000 ±25 %	0.45	100
MZ2029-152Y	1500 ±25 %	0.55	100
MZ2029-202Y	2000 ±25 %	0.60	50
MG1608-300Y	30 ±25 %	0.20	200
MG1608-400Y	40 ±25 %	0.30	300
MU1608-600Y	60 ±25 %	0.20	700
MG1608-800Y	80 ±25 %	0.30	300
MG1608-101Y	100 ±25 %	0.25	200
MG1608-121Y	120 ±25 %	0.30	200
MU1608-151Y	150 ±25 %	0.25	600
MU1608-221Y	220 ±25 %	0.30	200
MU1608-301Y	300 ±25 %	0.35	150
MU1608-471Y	470 ±25 %	0.45	350
MZ1608-601Y	600 ±25 %	0.45	100
MZ1608-102Y	1000 ±25 %	0.60	100
MZ1608-152Y	1500 ±25 %	0.70	50
MG1608-202Y	2000 ±25 %	0.80	50
MG1608-222Y	2200 ±25 %	1.50	200
MU1005-100Y	10 ±25 %	0.10	500
MU1005-300Y	30 ±25 %	0.20	300
MU1005-600Y	60 ±25 %	0.25	300
MU1005-121Y	120 ±25 %	0.30	100
MU1005-151Y	150 ±25 %	0.30	100
MU1005-221Y	220 ±25 %	0.40	100
MU1005-241Y	240 ±25 %	0.60	100
MU1005-301Y	300 ±25 %	0.50	100
MU1005-471Y	470 ±25 %	0.65	100
MU1005-601Y	600 ±25 %	0.80	80
MU1005-102Y	1000 ±25 %	1.20	80

General Specifications

Operating Temperature .....-55 °C to +125 °C
Storage Temperature ..-55 °C to +125 °C
Storage Condition .....+40 °C max. at 70 % RH
Reflow Soldering .....230 °C, 50 seconds max.
Resistance to Soldering Heat .....260 °C, 5 seconds
Rated Current .....Based on max. temperature rise of +40 °C
Terminal Strength
(Force "F" applied for 30 seconds)
3261 Series .....1.0 F (Kg)
2029 Series .....0.6 F (Kg)
1608 Series .....0.5 F (Kg)


Materials

Core Material .....Ferrite
Internal Conductor .....Ag or Ag/Pd
Terminal .....Ag/Ni/Sn


*RoHS Directive 2002/95/EC Jan 27 2003 including Annex
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 3261- 300Y

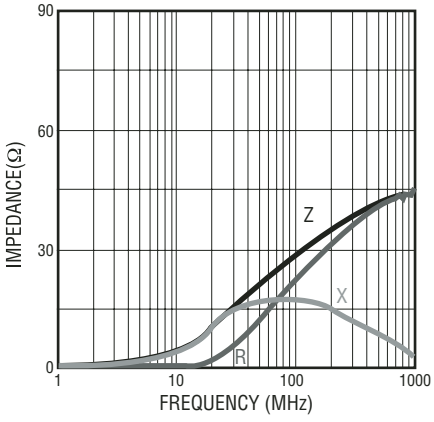


MU 3261- 600Y

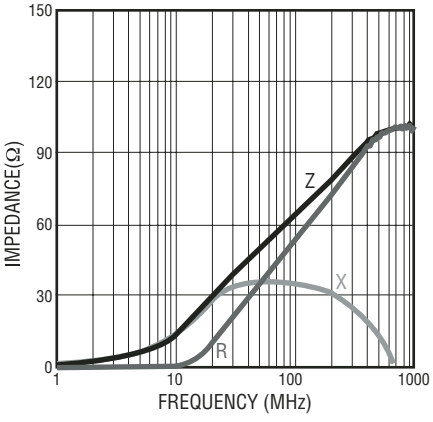


MU 3261- 750Y

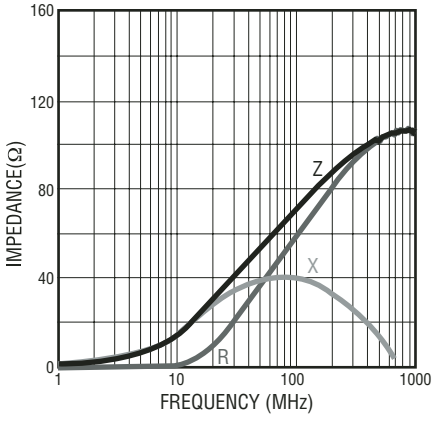


MU 3261- 101Y

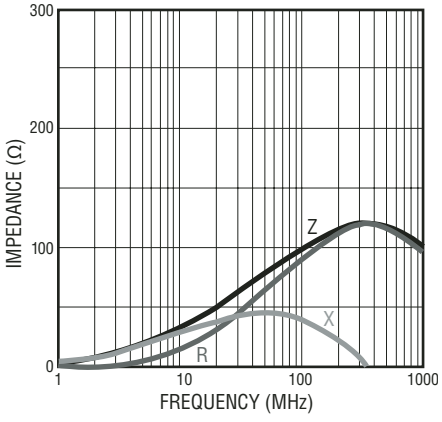


MU 3261- 121Y

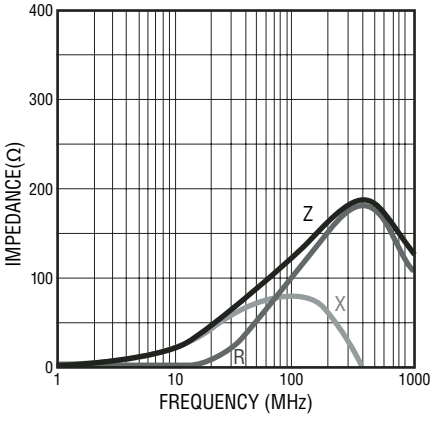


MG 3261- 151Y

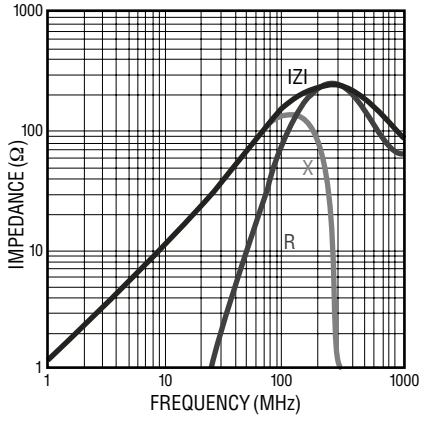


MU 3261- 221Y

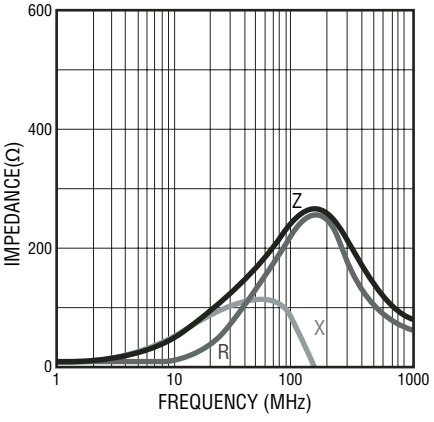

MG 3261- 301Y

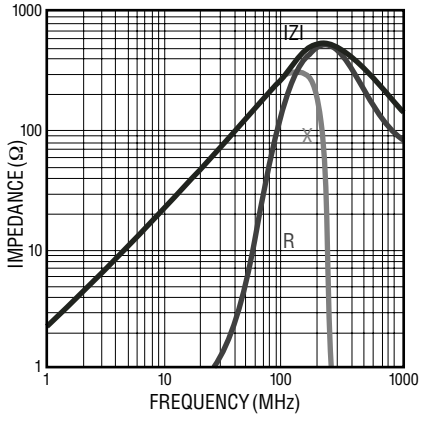


MU 3261- 301Y

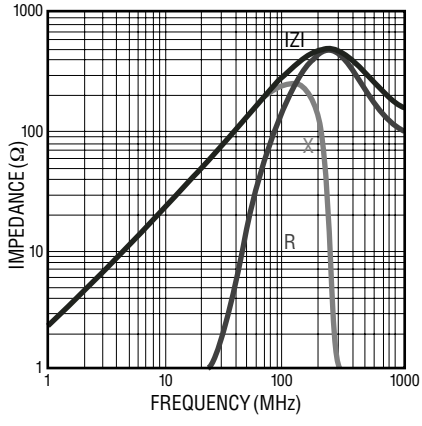


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 3261- 471Y

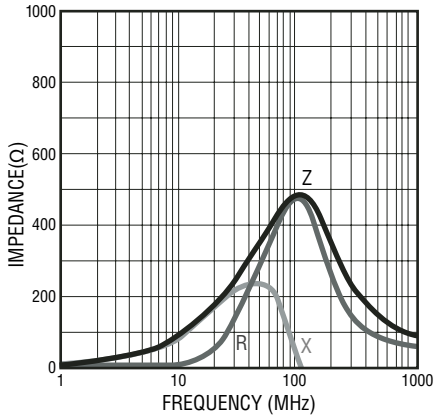


MU 3261- 601Y

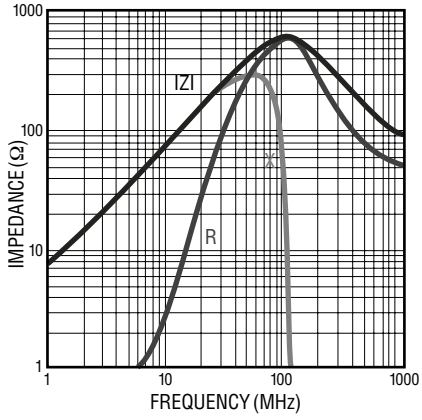


MZ 3261- 601Y

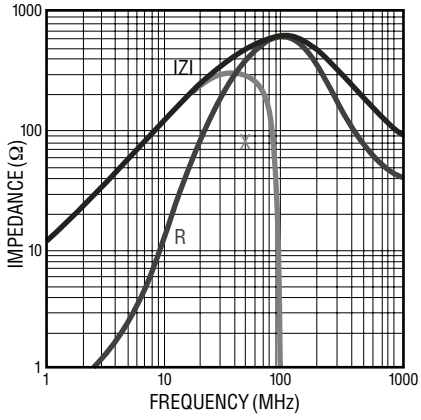


MU 3261- 801Y

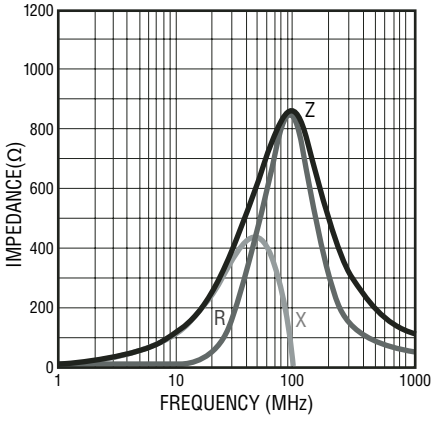


MZ 3261- 122Y

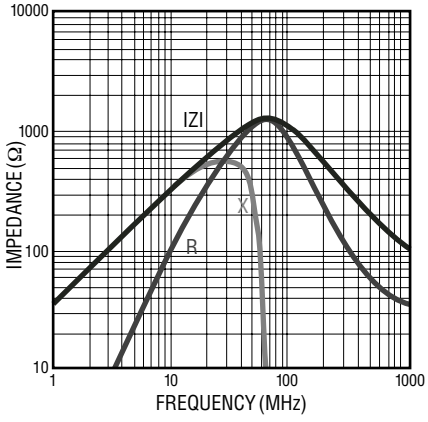


MU 3261- 102Y

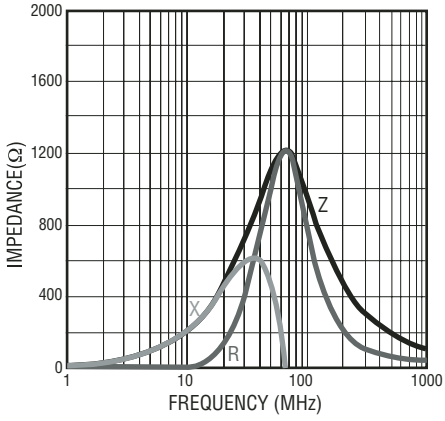


MU 3261- 122Y

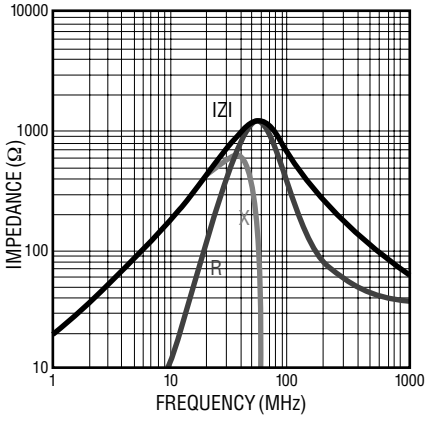

MU 3261- 152Y

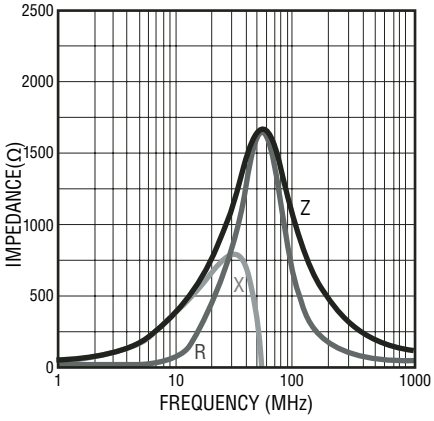


MZ 3261- 202Y

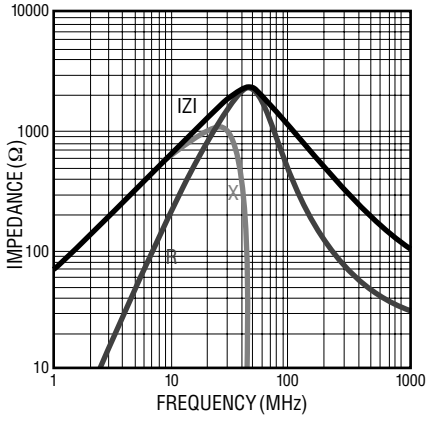


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 3261- 202Y

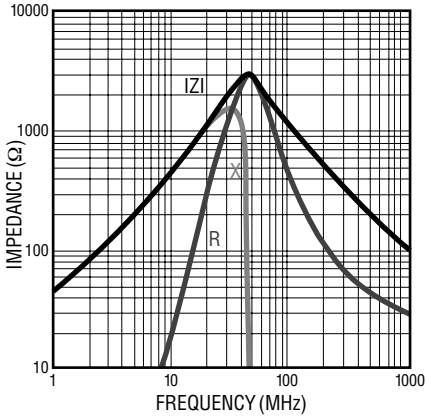


MG 2029- 100Y

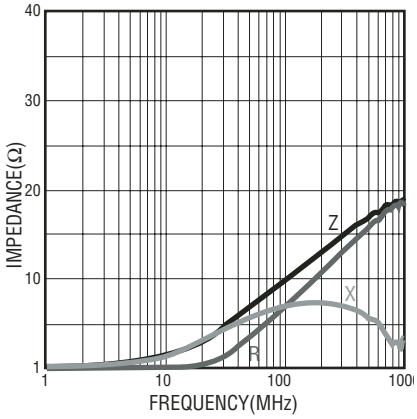


MG 2029- 300Y

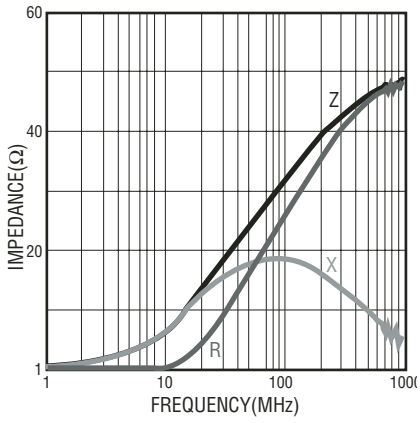


MG 2029- 400Y

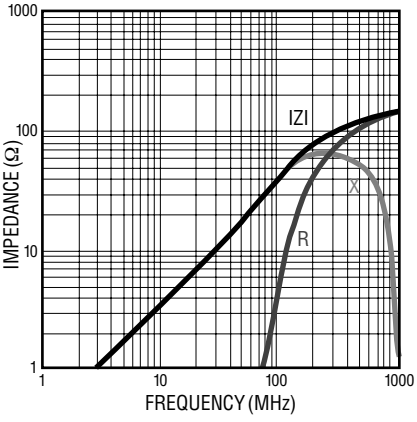


MU 2029- 600Y

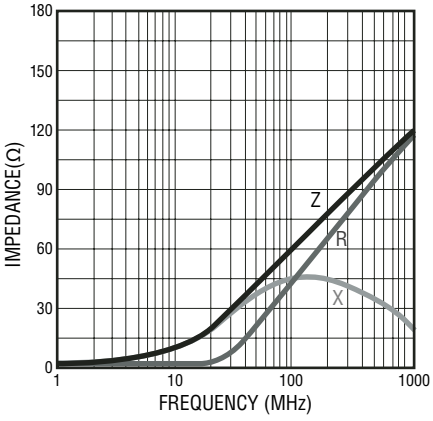


MG 2029- 800Y

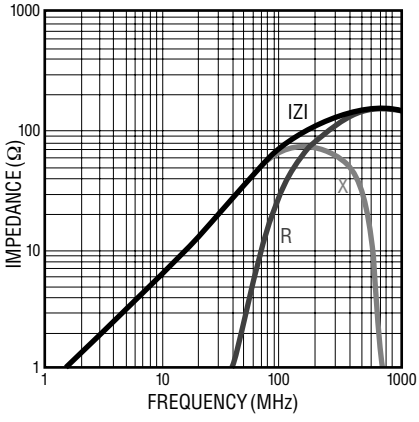


MG 2029- 101Y

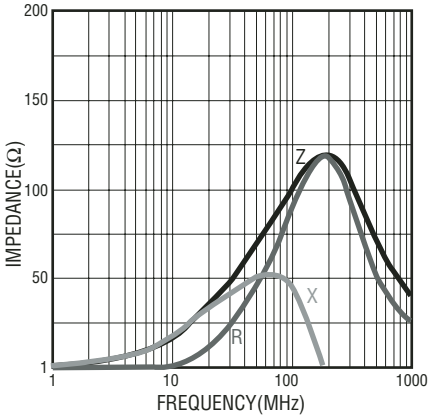

MG 2029- 121Y

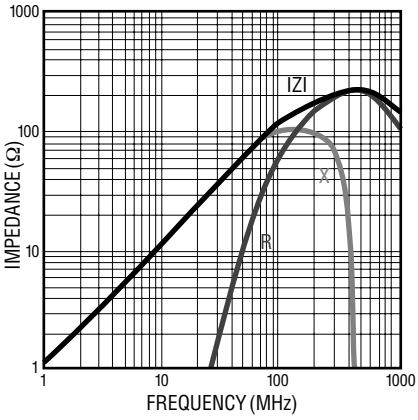


MU 2029- 151Y

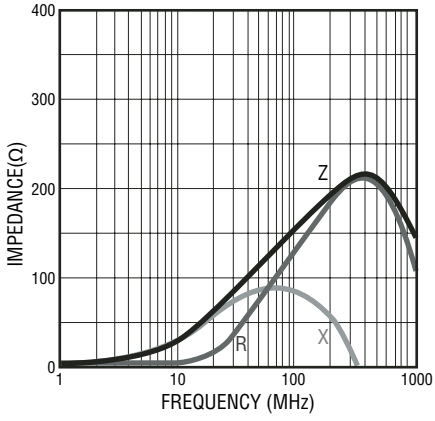


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 2029- 221Y

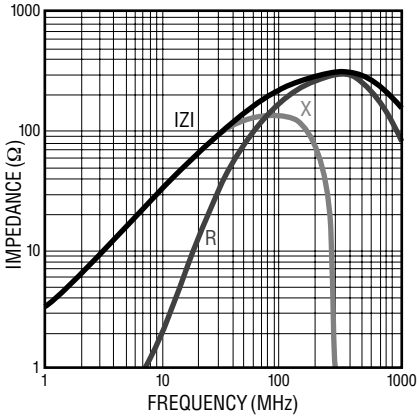


MU 2029- 301Y

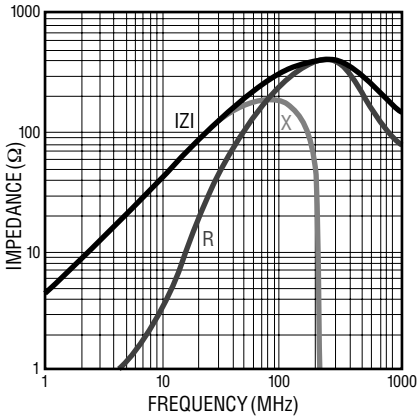


MU 2029- 471Y

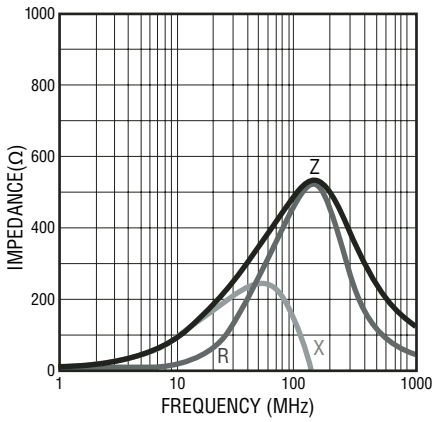


MZ 2029- 601Y

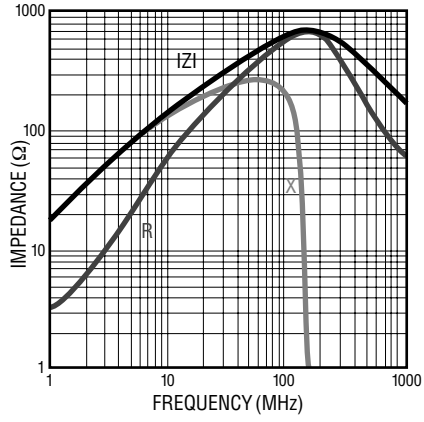


MZ 2029- 102Y

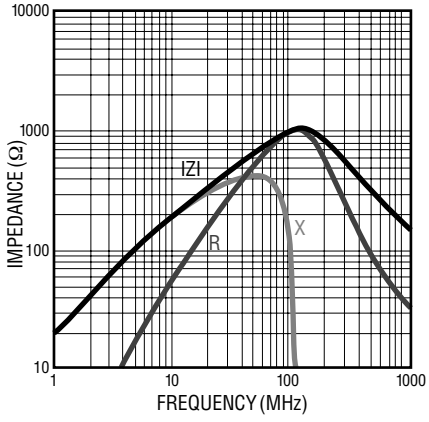


MG 2029- 152Y

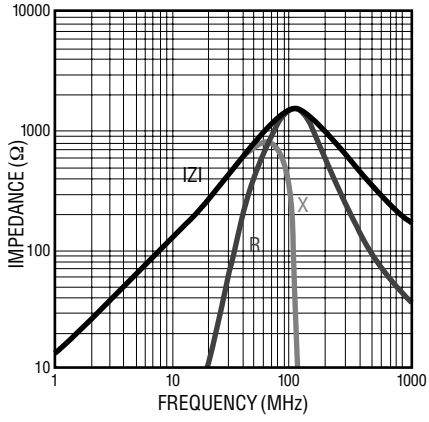


MG 2029- 202Y

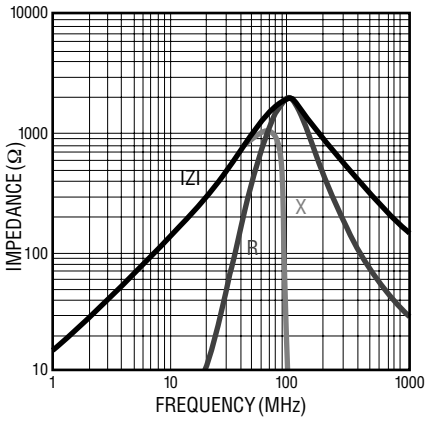

MU 1608- 300Y

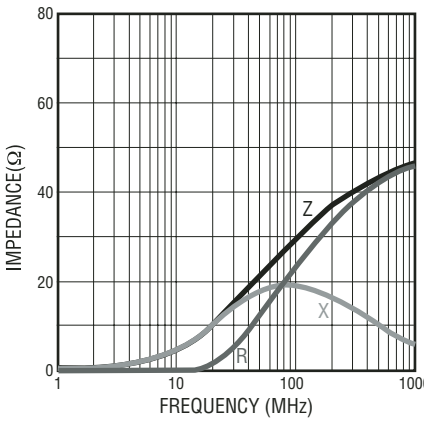


MG 1608- 400Y

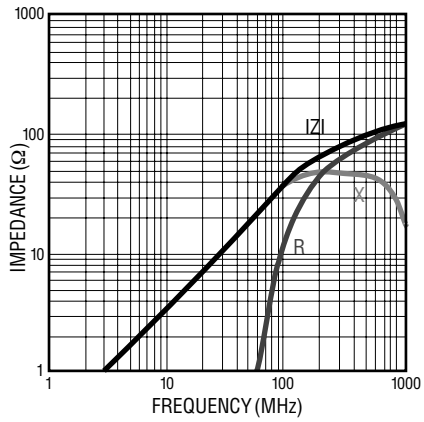


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 1608- 600Y

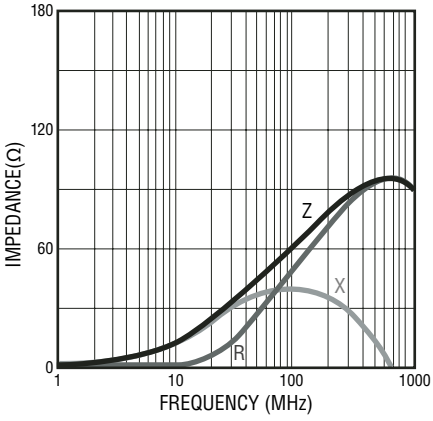


MG 1608- 800Y

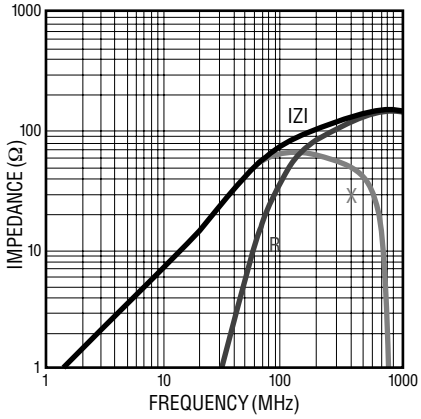


MU 1608- 101Y

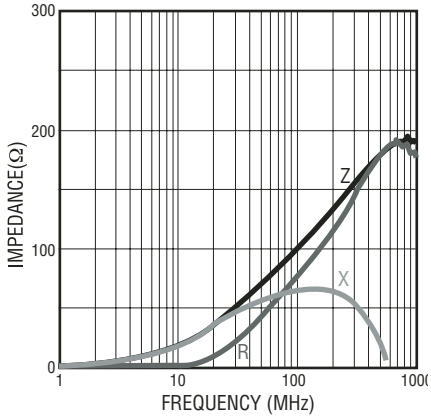


MG 1608- 121Y

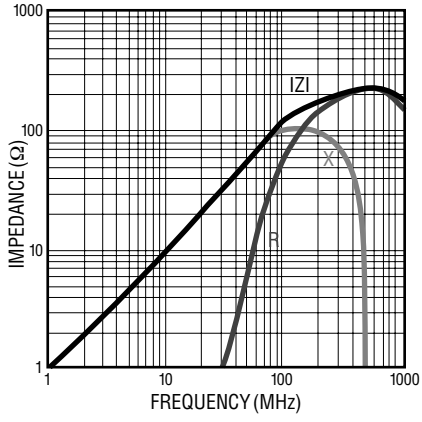


MU 1608- 151Y

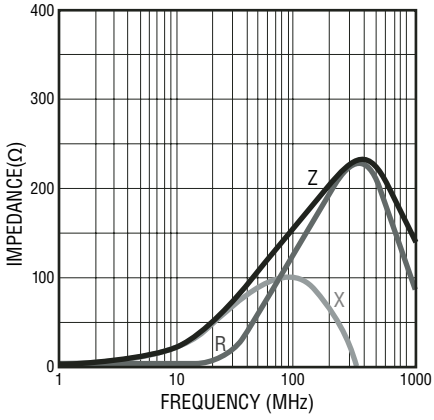


MU 1608- 221Y

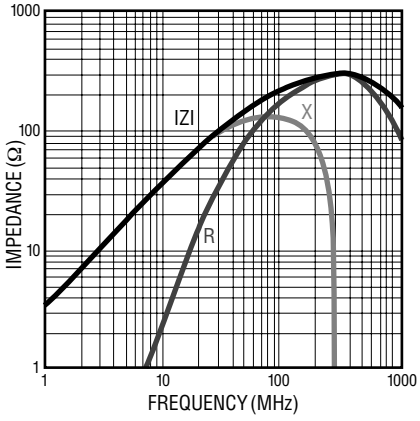


MU 1608- 301Y

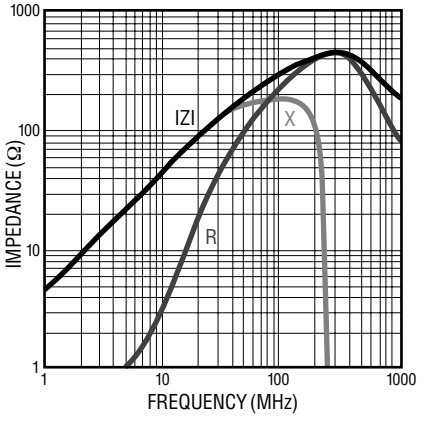

MU 1608- 471Y

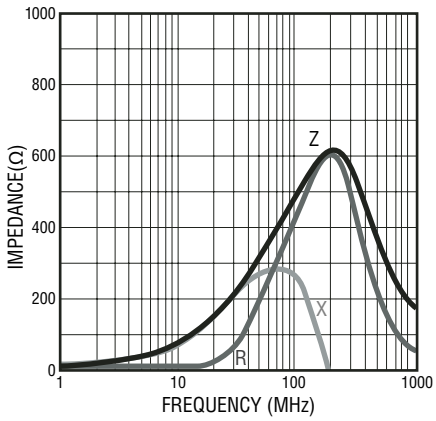


MZ 1608- 601Y

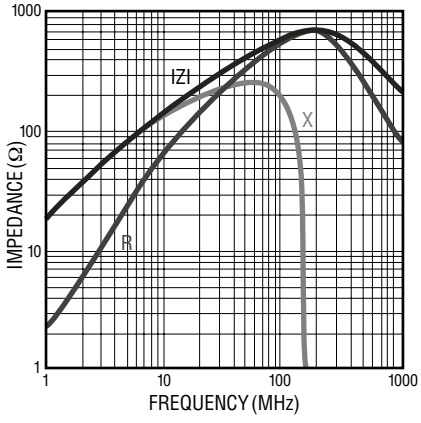


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MZ 1608- 102Y

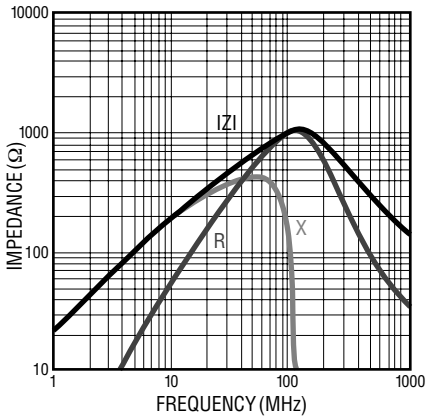


MG 1608- 152Y

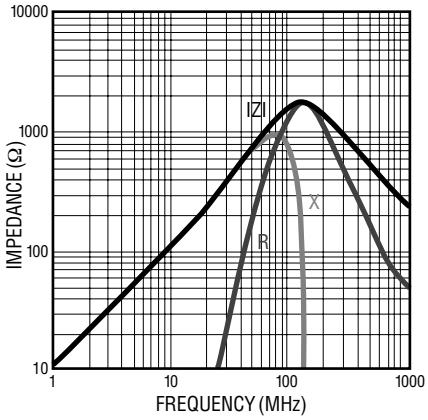


MG 1608- 202Y

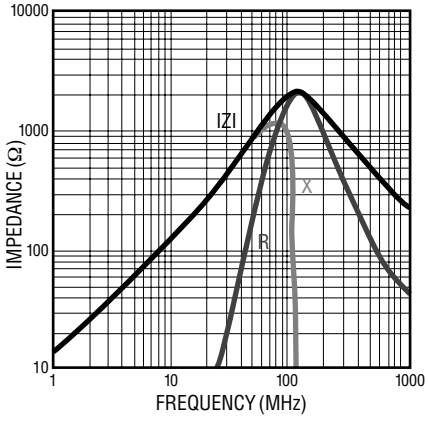


MZ 1608- 222Y

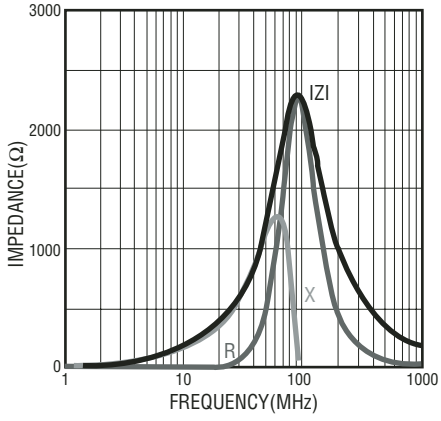


MU 1005- 100Y

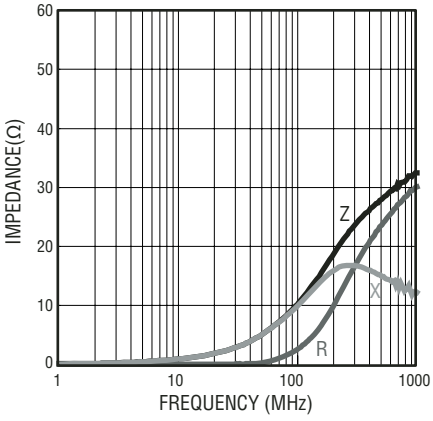


MU 1005- 300Y

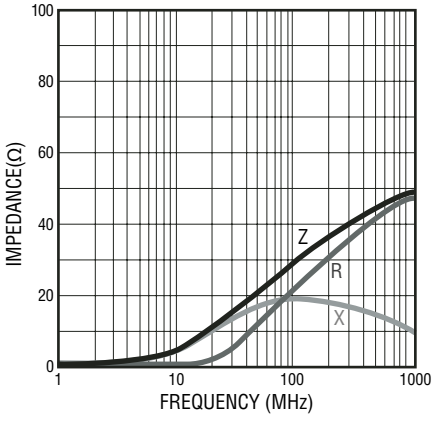


MU 1005- 600Y

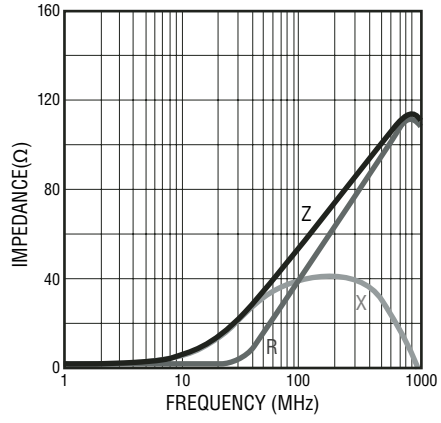

MU 1005- 121Y

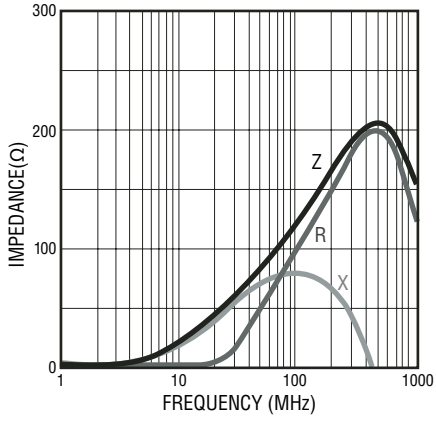


MU 1005- 151Y

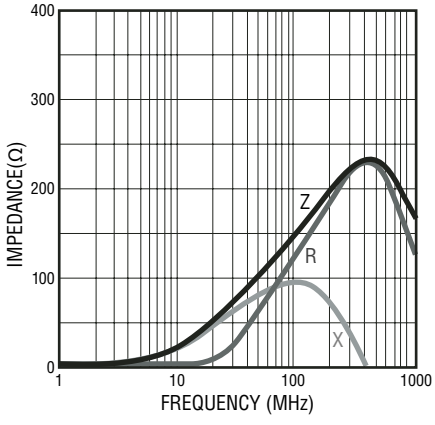


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Electrical Specifications (continued)


MU 1005- 221Y

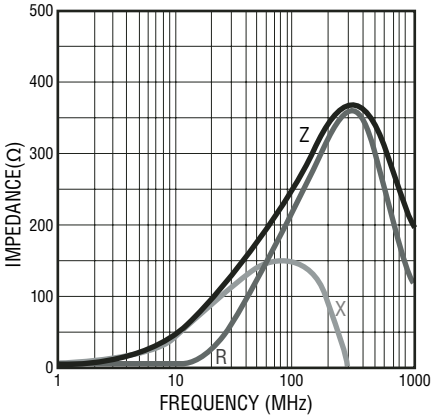


MU 1005- 241Y

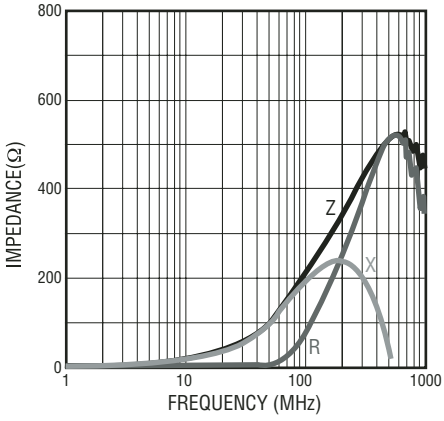


MU 1005- 301Y

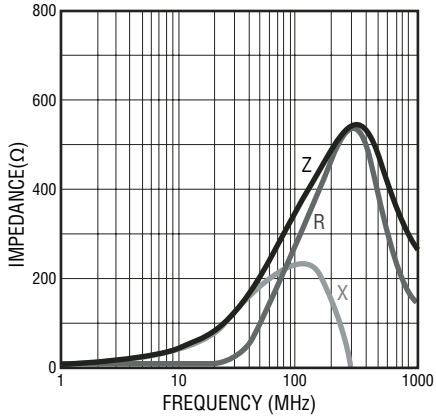


MU 1005- 471Y

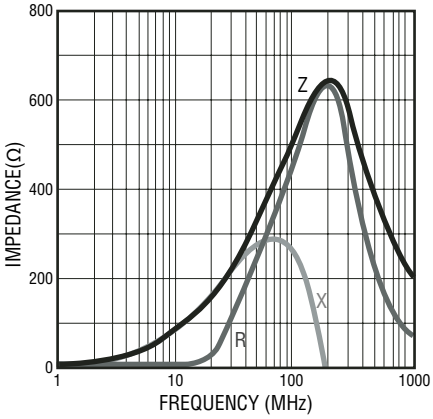

MU 1005- 601Y

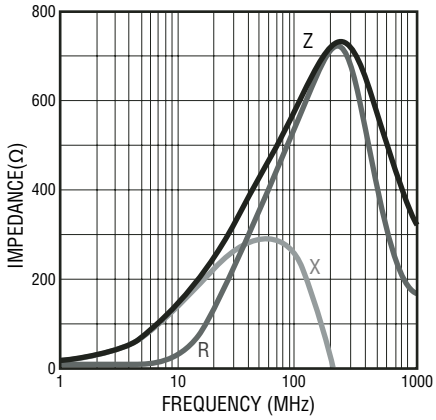

MU 1005- 102Y

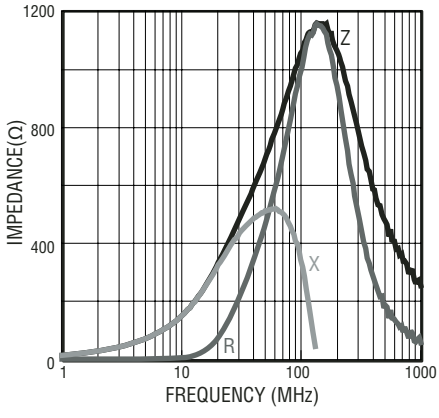


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.


MG, MU, MZ Series High Impedance Chip Ferrite Beads

BOURNS®

Product Dimensions

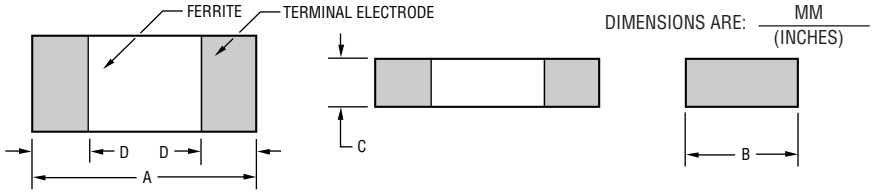


Recommended Land Pattern




Series	A	B	C	D	G	H	I
3261	3.2 ±0.2 (.126 ±.008)	1.6 ±0.2 (.063 ±.008)	1.1 ±0.2 (.043 ±.008)	0.5 ±0.2 (.020 ±.008)	2.0 (.079)	1.4 (.053)	1.1 (.043)
2029	2.0 ±0.2 (.079 ±.008)	1.2 ±0.2 (.047 ±.008)	0.9 ±0.2 (.035 ±.008)	0.5 ±0.2 (.020 ±.008)	1.0 (.040)	1.0 (.040)	1.0 (.040)
1608	1.6 ±0.2 (.063 ±.008)	0.8 ±0.2 (.031 ±.008)	0.8 ±0.2 (.031 ±.008)	0.5 ±0.2 (.020 ±.008)	0.7 (.028)	0.7 (.128)	0.7 (.128)
1005	1.0 ±0.10 (.04 ±.004)	0.50 ±0.10 (0.02 ±.004)	0.50 ±0.10 (.02 ±.004)	0.25 ±0.10 (.01 ±.004)	0.5 (.02)	0.55 (.022)	0.7 (.028)

Reel Dimensions

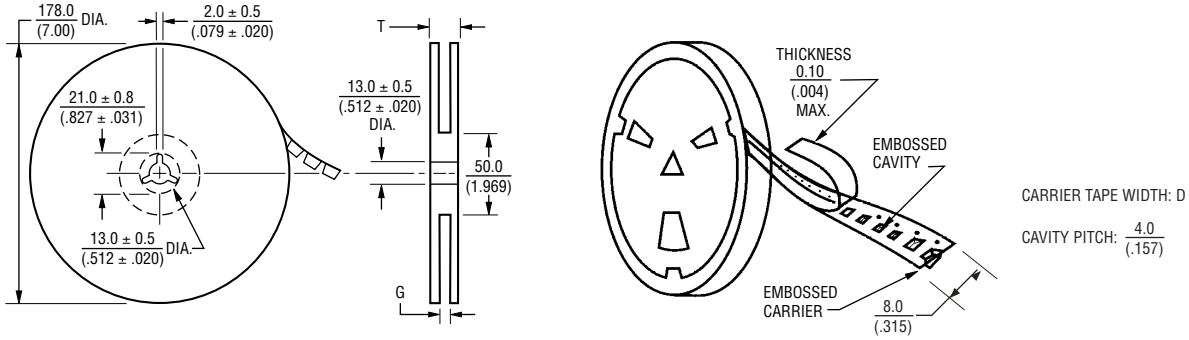


Series	Pcs. per Reel	Gross Weight (g)	D	G	T
3261	3,000	150	8.0 (.315)	10.0 +0 (.394 +0)	12.5 (.492)
2029	4,000	120			
1608	4,000	90			
1005	10,000	135			

Equivalent Circuit



Recommended Soldering

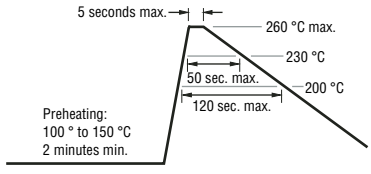

REV. 11/07

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.