



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	

APPROVED: _____

DATE: _____ TITLE: _____

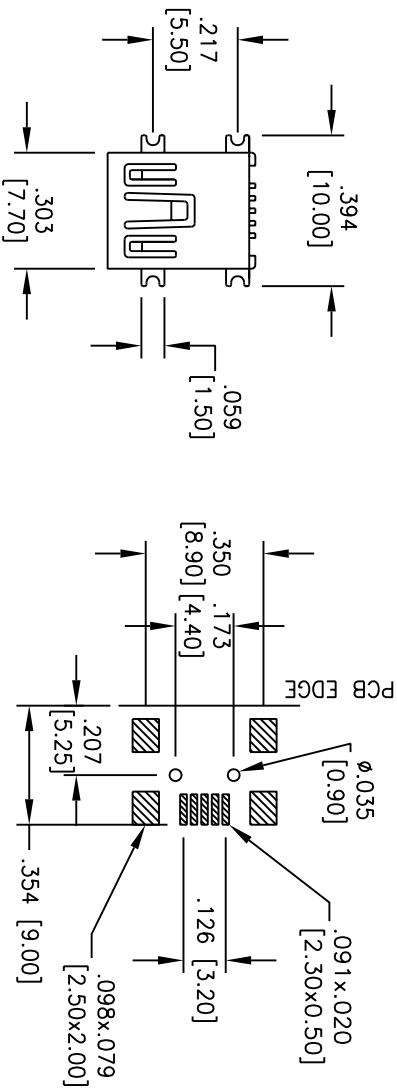

PCB LAYOUT

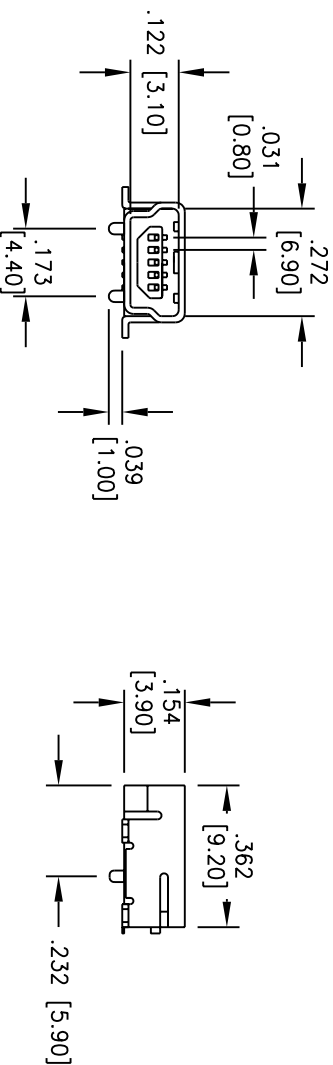

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Tin plated

Plating:

Gold Flash over Nickel underplate on contact area, Tin over

Copper underplate on SMT tails

Electrical:

Operating voltage: 30 VAC max.

Current rating: 1 Amp max.

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

PACKAGED ON TAPE AND REEL

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MINI USB, TYPE B, 5 pin, SINGLE PORT

RIGHT ANGLE, SMT, TAPE AND REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.XX ± .10				ØXX ± .10				.XXX ± .015			
.XXX ± .015				.XXX ± .015				.XXX ± .010			
APPROVALS				DATE							
DRAWN				SS				10/4/04			
CHECKED											
APPROVED											
TITLE				SIZE				PART NO.			
REF:				X				MUSB-B5-S-RA-SMT-1TR			
SCALE:				N1S				SHEET 1 OF 1			