
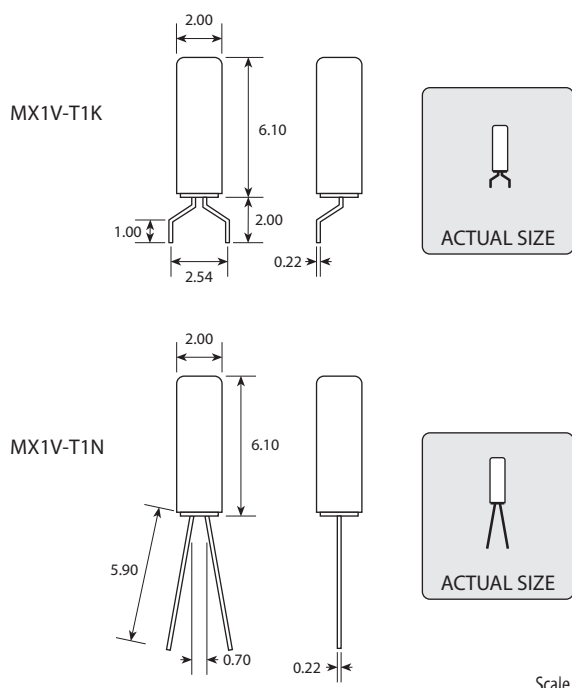


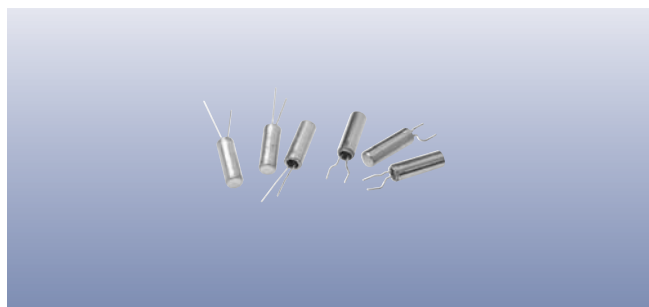

Specifications

Parameters	Product	Option Code
	MX1V-T	
Termination: Straight leads SMD formed leads, 2.54mm pitch	☐ ☒	1N 1K
Frequency range: 30.0 ~ 200kHz	☒	
Calibration tolerance: ±20ppm ±30ppm ±100ppm	☐	specify
	☒	
	☐	specify
Operating temperature range: -40 to +85°C	☒	
Storage temperature range: -55 to +125°C	☒	
Circuit condition: 10pF Other	☒ ☐	specify
Static capacitance (C₀): 0.9pF	☒	
Motional capacitance (C₁): 2.1fF typ @ 32.768kHz 2.1fF typ @ 38.40kHz 1.35fF typ @ 76.80kHz	☒	
	☒	
	☒	
	☒	
Equivalent series resistance: 40kΩ typ, 55kΩ max @ 32.768kHz 32kΩ typ, 50kΩ max @ 38.40kHz 13kΩ typ, 20kΩ max @ 76.0kHz	☒	
	☒	
	☒	
	☒	
Ageing: ±3ppm max first year	☒	
Drive level: 1.0μW max	☒	
Turnover temperature (T₀): +25°C ±5°C @ 32.768kHz +25°C ±5°C @ 38.40kHz +22°C ±5°C @ 76.0kHz	☒	
	☒	
	☒	
	☒	
Frequency / temp coefficient: -0.035ppm/°C ² ±10% typ	☒	
Shock resistance: ±5ppm max 5,000g, 0.3ms, ½ sine	☒	
Vibration resistance: ±5ppm max, 20g, 10.0 ~ 2,000Hz	☒	

■ Standard. □ Optional - Please specify required code(s) when ordering

Features

- ▮ High shock resistance
- ▮ Wide temperature range
- ▮ Low power consumption
- ▮ SM version on tape & reel

Standard Frequencies

Frequencies in kHz		
32.000	49.152	76.800
32.768	60.000	77.500
38.400	60.002	77.503
40.000	65.536	100.000
40.003	75.000	153.600

Ordering Information

Product name + termination + option codes (if any) + frequency + calibration tolerance + load capacitance
 eg: **MX1V-T1K 38.40kHz ±30ppm 10pF** -40+85°C
 eg: **MX1V-T1N 32.768kHz ±30ppm 12.5pF** -40+85°C
 Option code X (eg MX1V-T1K/X) denotes a custom spec.

- ◆ SM version available on T&R - 8k pcs per reel.
- ◆ Refer to our website for T&R and soldering details.