

NF3000C-YXS Series (RoHS Compliant)

3-phase 3-line 500VAC

Space saving Book type



UL1283 (file No.E102708)
EN60939-2 (file No.R50031207)

Applications

Semiconductor equipment, Machine tool, General-purpose inverter and servo, Power source for Elevator, Factory, Power source for CVCF

Specifications

Part No.	Rated Current	Weight	Dimensions [mm]													
			A	B	C	D	E	F	G	H	J	K	L	M		
NF3010C-YXS	10A	0.5kg	110	100	50	40	95	M4	M4	M4	R2.25×6	dia.4.5	9	11	fig1	
NF3020C-YXS	20A															
NF3030C-YXS	30A															
NF3040C-YXS	40A	0.8kg	128	120	65	55	95	M5	M5	M4	R2.25×6	dia.4.5	13	16		
NF3050C-YXS	50A															
NF3060C-YXS	60A															
NF3080C-YXS	80A	1.6kg	fig2													
NF3100C-YXS	100A															
NF3125C-YXS	125A	2.8kg	fig3													
NF3150C-YXS	150A															
NF3200C-YXS	200A	6.9kg	fig4													
NF3250C-YXS	250A	8.1kg														
NF3300C-YXS	300A															
Rated Voltage	500VAC max															
Leakage Current	10-150A : 5mA / 200-300A : 10mA max 400VAC 50Hz By UL1283															
Ambient temp.	-20 up to 50 Deg.C															

fig.1 (10~60A)

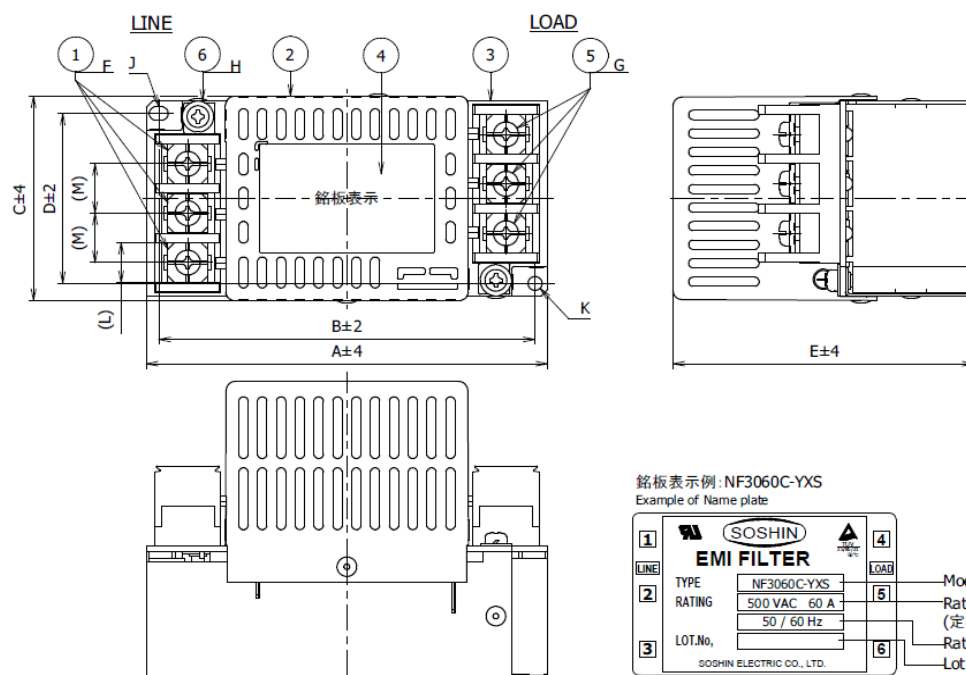


fig.2 (80, 100A)

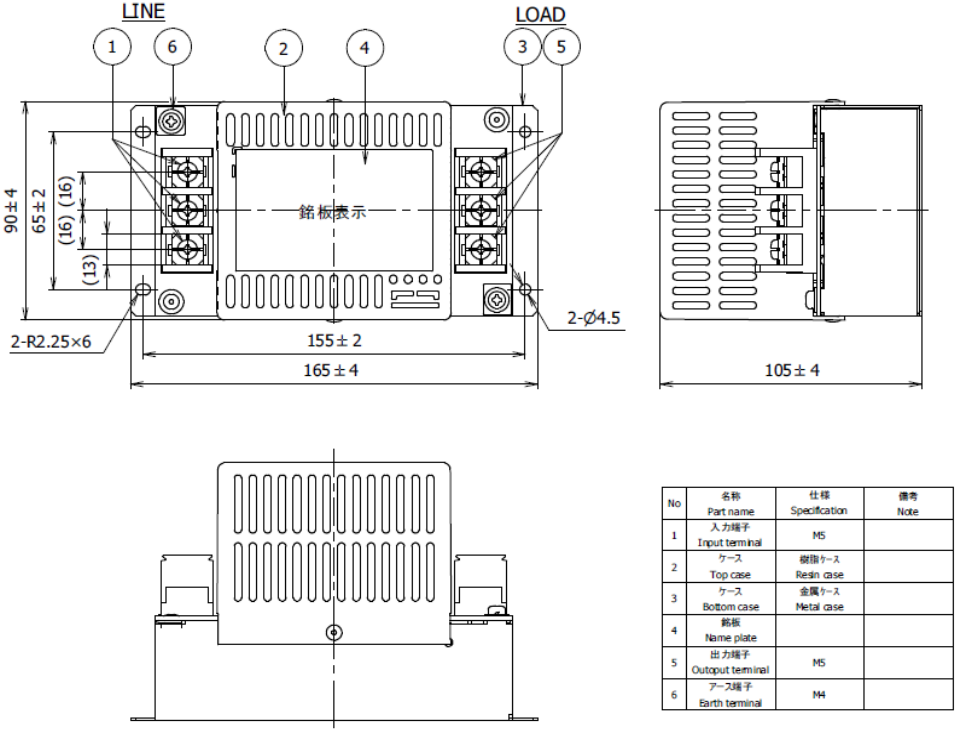


fig. 3 (125, 150A)



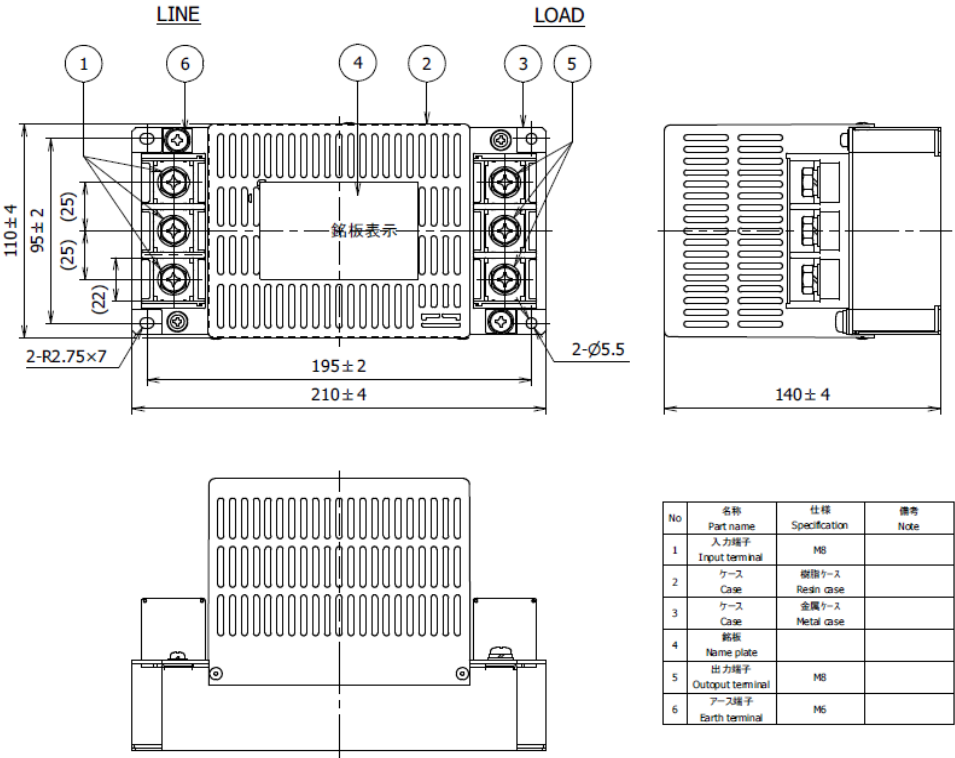



fig. 4 (200~300A)

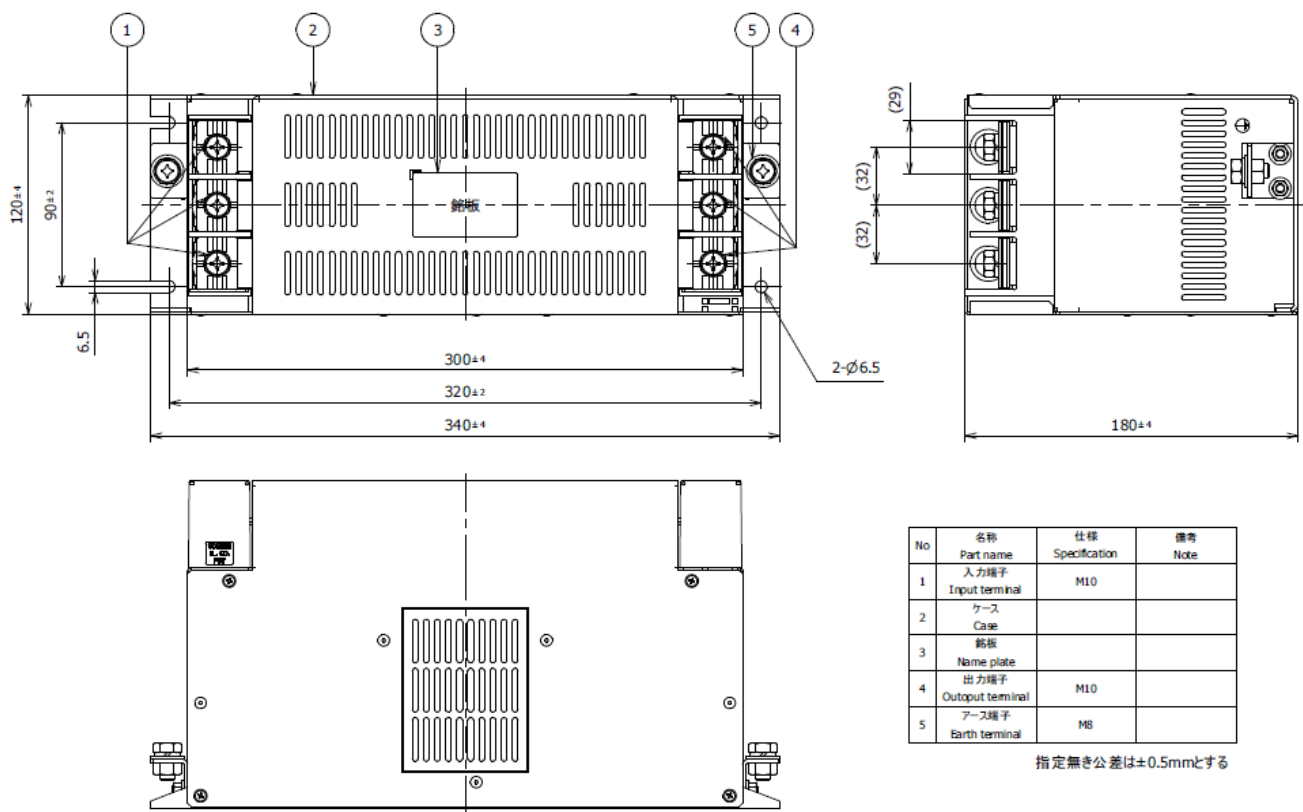


Characteristics (Typical) (10, 20, 30A)

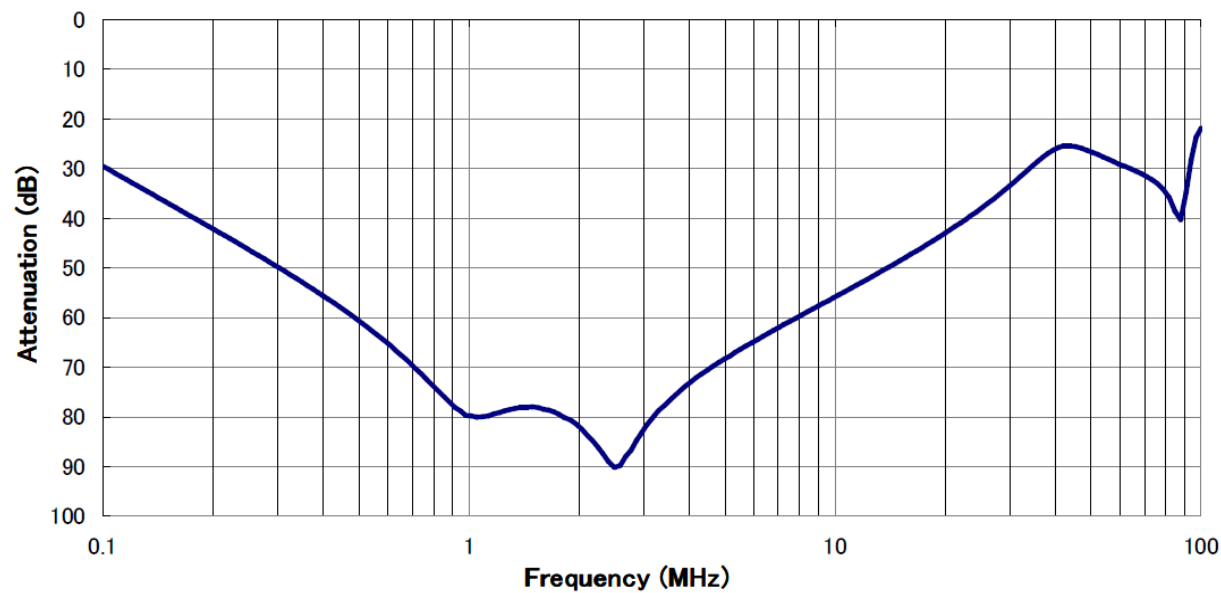


Characteristics (Typical) (40, 50, 60A)

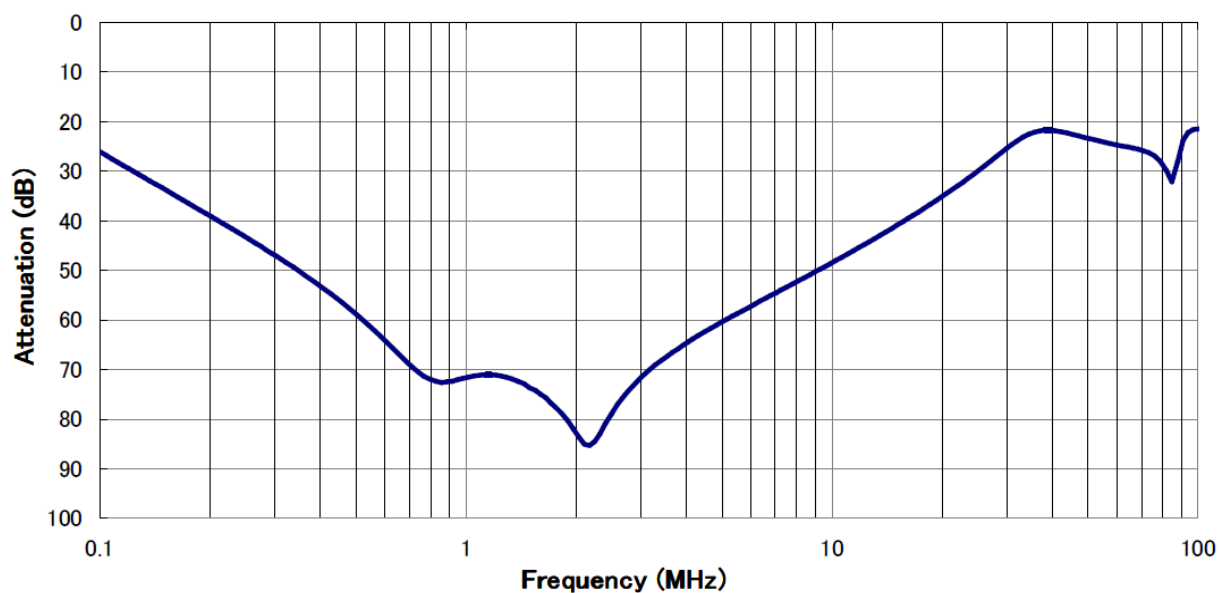

Characteristics (Typical) (80, 100A)

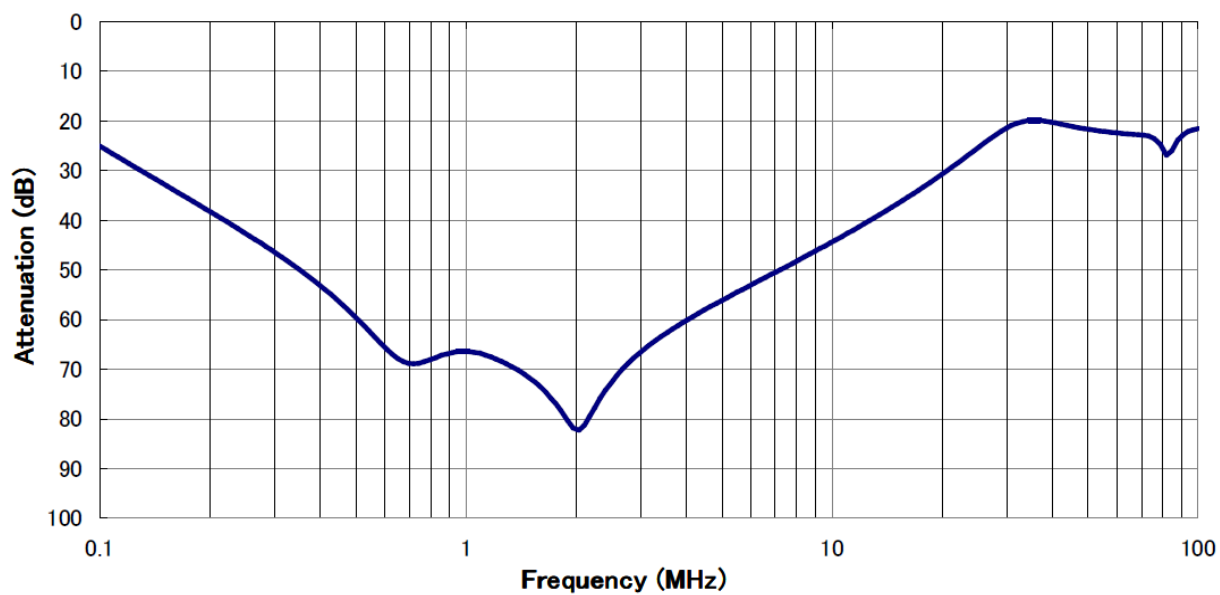

Characteristics (Typical) (125, 150A)

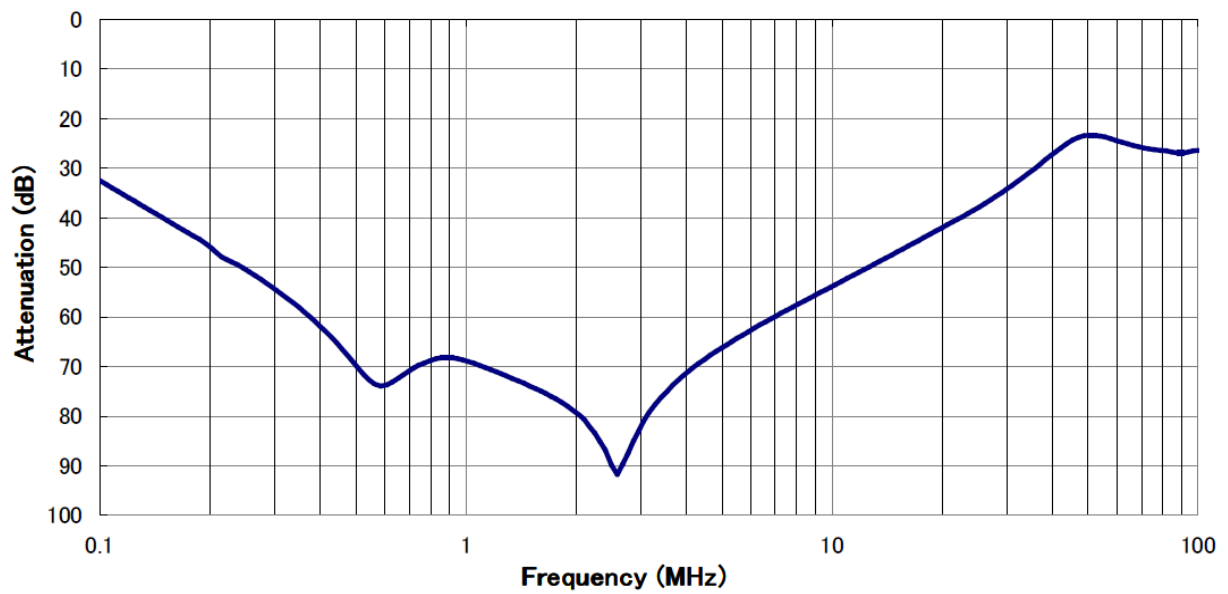

Circuit Diagram

