

NFU3000C-Z1 Series (RoHS Compliant)

3-phase 3-line 500VAC

Multi-functional type, Connectable with Serge unit



UL1283 (file No.E102708)

EN60939-2 (file No.R50072644)

Applications

General purpose inverter, Machining center

Specifications

Parts No.	Rated Current	Weight	
NFU3010C-Z1	10A	0.6kg	fig1
NFU3020C-Z1	20A	0.6kg	
NFU3030C-Z1	30A	0.7kg	
NFU3040C-Z1	40A	1.1kg	fig2
NFU3050C-Z1	50A	1.1kg	
NFU3060C-Z1	60A	1.2kg	

Rated Voltage	500VAC max
Leakage Current	3.0mA max/500VAC 60Hz By UL1283
Ambient temp.	-20 up to 50 Deg.C

fig. 1



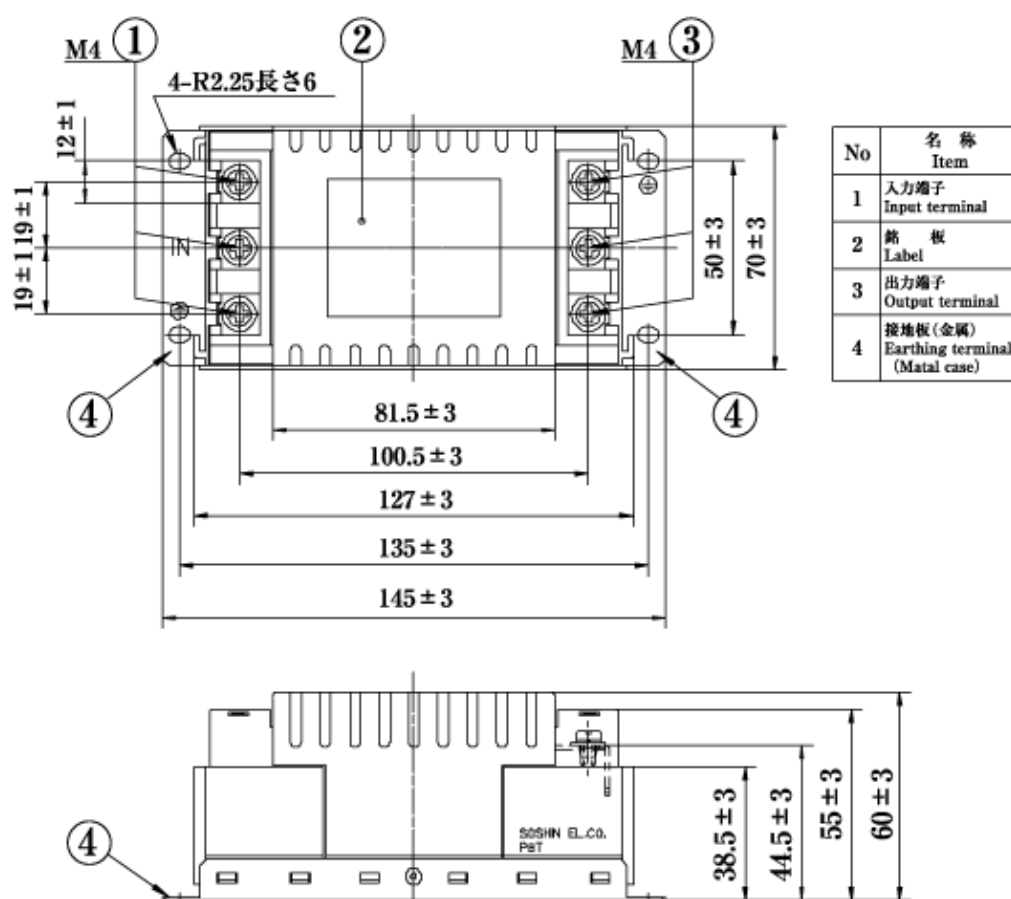



fig. 2

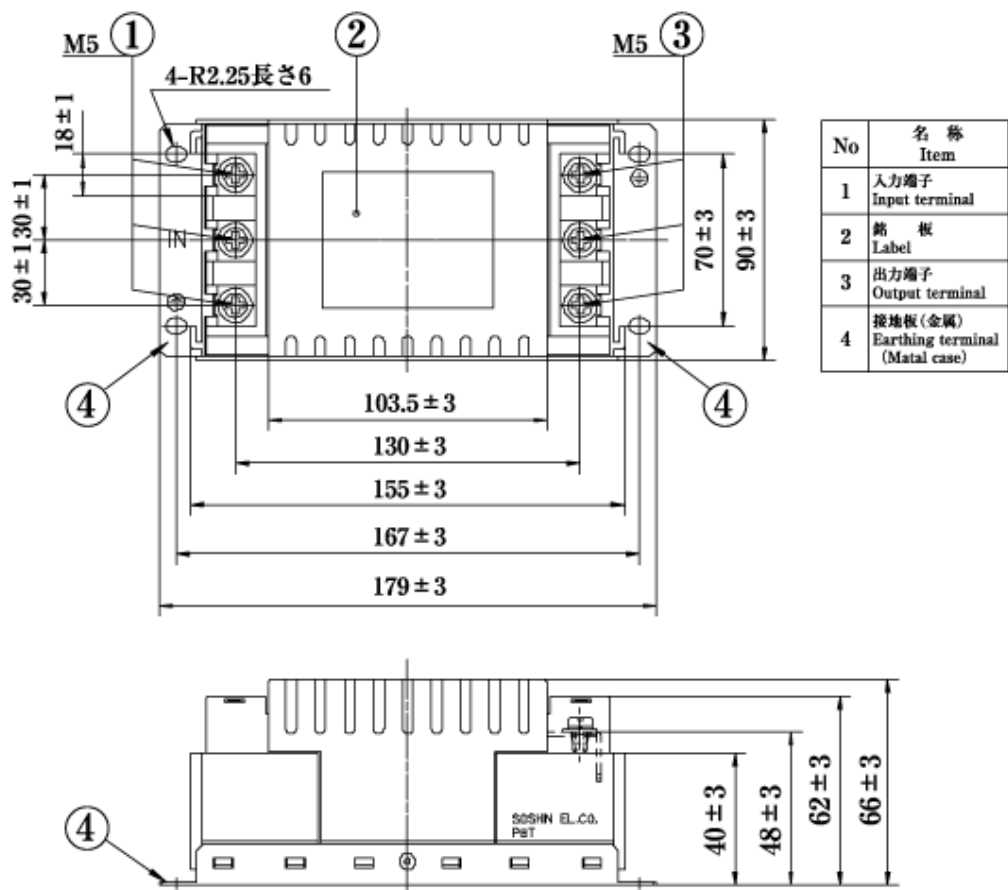

Attenuation Characteristics (10A)

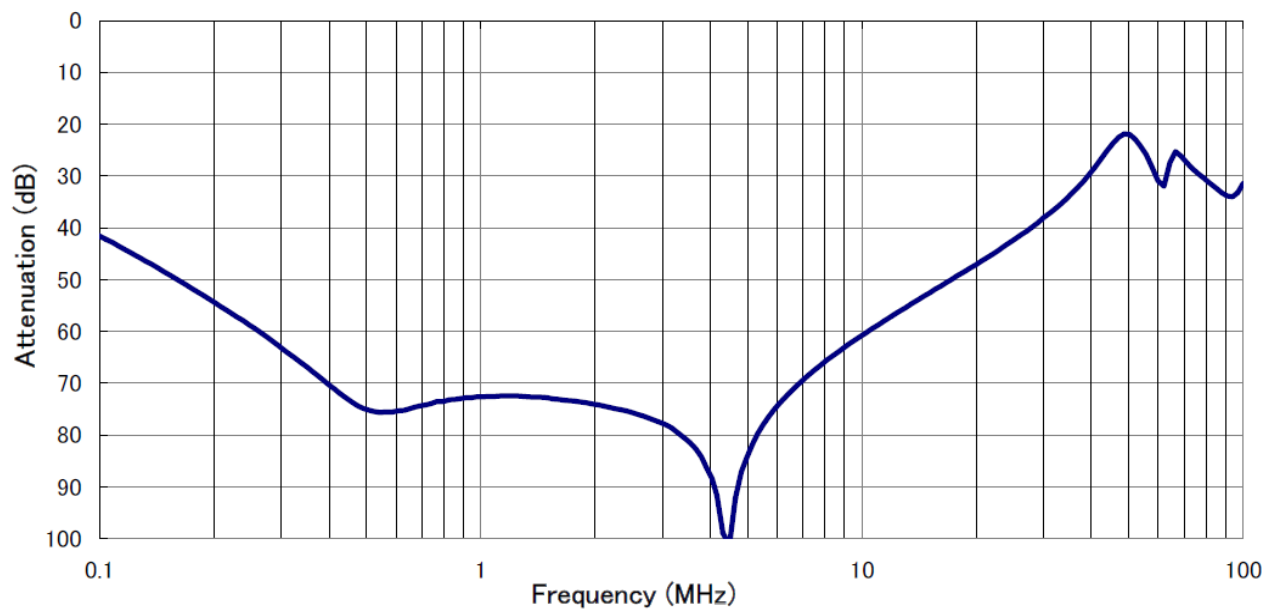

Attenuation Characteristics (40A)

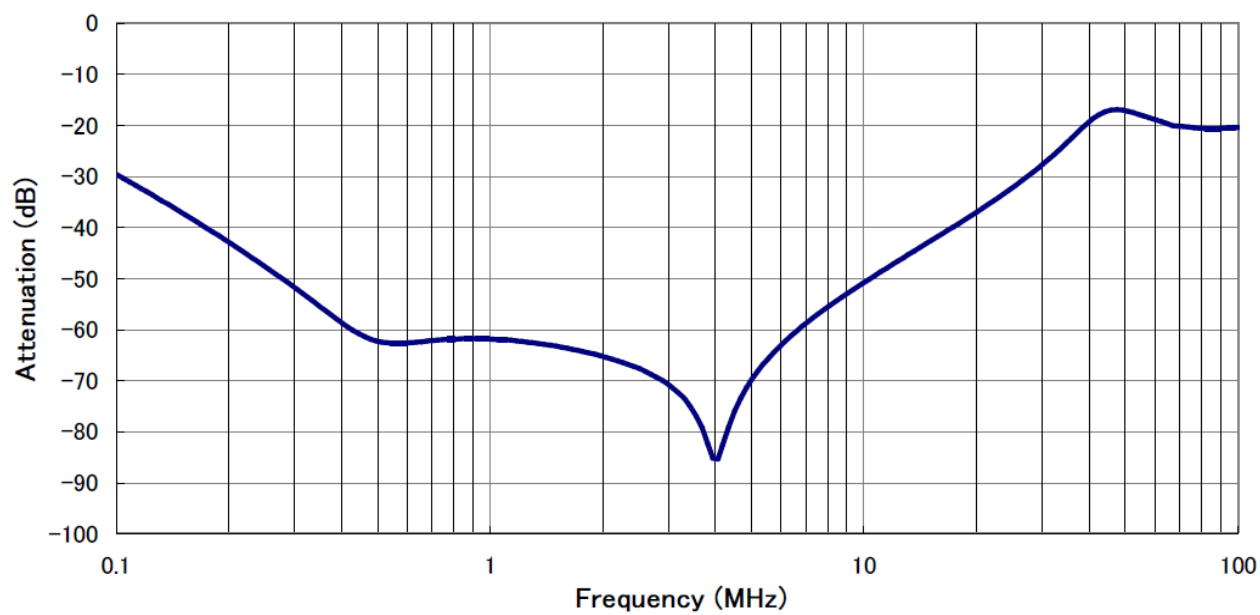

Circuit Diagram

