Energizer
1-800-383-7323 USA/CAN
www.energizer.com


ENERGIZER NH22-175

9V




Industry Standard Dimensions


mm (inches)

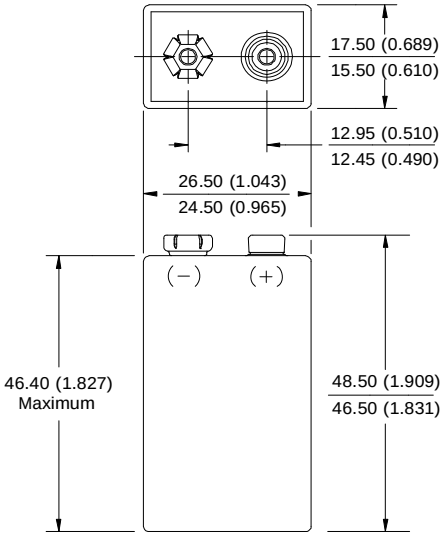

Discharge Characteristics

Typical Performance at 21°C (70°F)

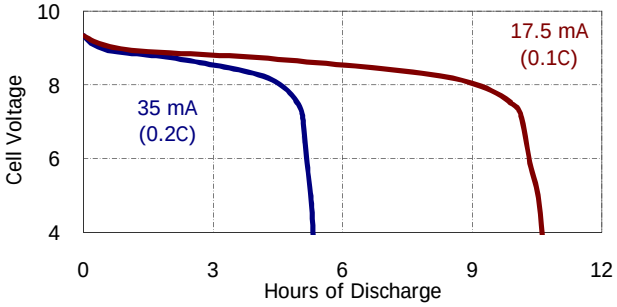

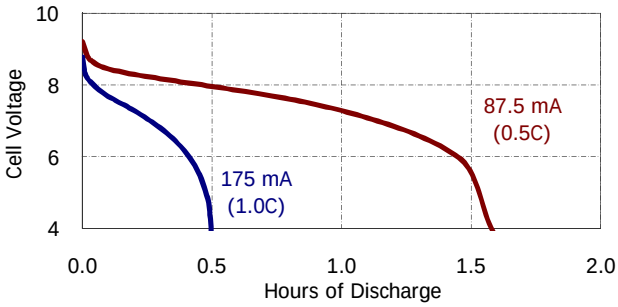

Specifications

Classification:	Rechargeable
Chemical System:	Nickel-Metal Hydride (NiMH)
Designation:	ANSI-7.2H5
Nominal Voltage:	8.4 Volts
Rated Capacity:	175 mAh* at 21°C (70°F)
Typical Weight:	42.0 grams (1.5 oz.)
Typical Volume:	22.0 cubic centimeters (1.3 cubic inch)
Terminals:	Snap
Jacket:	Plastic

* Based on 35 mA (0.2C rate) continuous discharge to 1.0 volts.

Internal Resistance:

The internal resistance of the cell varies with state of charge, as follows:

Cell Charged	Cell 1/2 Discharged
1000 milliohms	1500 milliohms

(tolerance of ±20% applies to above values)

AC Impedance (no load):

The impedance of the charged cell varies with frequency, as follows:

Frequency (Hz)	Impedance (milliohms) (charged cell)
1000	950

Above values based on AC current set at 1.0 ampere.
Value tolerances are ±20%.

Operating and Storage Temperatures:

To maintain maximum performance, observe the following general guidelines regarding environmental conditions:

Charge:	0ºC to 40ºC (32ºF to 104ºF)
Discharge:	0ºC to 50ºC (32ºF to 122ºF)
Storage:	-20ºC to 30ºC (-4ºF to 86ºF)
Humidity:	65±20%

NOTE: Operating at extreme temperatures, will significantly impact battery cycle life.

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.