
LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DESCRIPTION


The NJM2845 is low dropout voltage regulator. Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

NJM2845 is 3 terminal type and NJM2846 is ON/OFF control built in type. These product can be selected according to the applications.

■ PACKAGE OUTLINE



NJM2845DL1




NJM2846DL3

■ FEATURES


- ● High Ripple Rejection 75dB typ. (f=1kHz,3V Version)
- ● Output Noise Voltage Vno=45μVrms typ. (Vo=3V Version)
- ● Output capacitor with 2.2μF ceramic capacitor (Vo≥2.6V)
- ● Output Current Io(max.)=800mA
- ● High Precision Output Vo ±1.0%
- ● Low Dropout Voltage 0.18V typ. (Io=500mA)
- ● ON/OFF Control (NJM2846)
- ● Internal Short Circuit Current Limit
- ● Internal Thermal Overload Protection
- ● Bipolar Technology
- ● Package Outline TO-252-3 (NJM2845DL1), TO-252-5 (NJM2846DL3)

■ PIN CONFIGURATION



1.V_{IN}
2.GND
3.V_{OUT}


NJM2845DL1




1.CONTROL
2.V_{IN}
3.GND
4.Vo
5.NC

NJM2846DL3

■ EQUIVALENT CIRCUIT

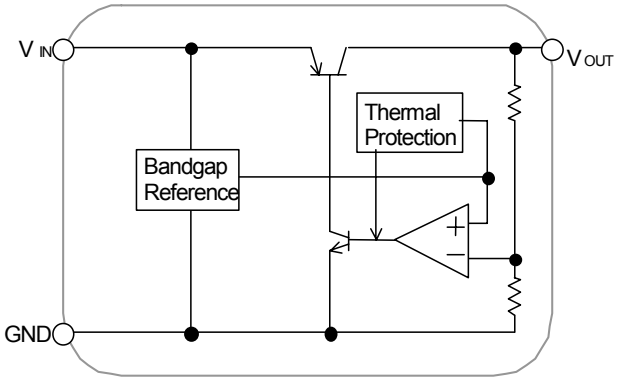

NJM2845DL1

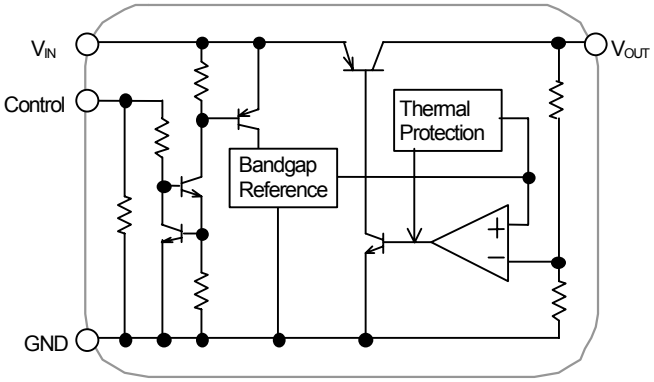

NJM2846DL3

■ OUTPUT VOLTAGE RANK LIST

Device Name	V_{OUT}
NJM284*DL*-18	1.8V
NJM284*DL*-23	2.3V
NJM284*DL*-25	2.5V
NJM284*DL*-03	3.0V
NJM284*DL*-33	3.3V
NJM284*DL*-05	5.0V

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+14	V
Control Voltage	V_{CONT}	+14(*1)	V
Power Dissipation	P_D	10(Tc≤25°C) 1.0(Ta≤25°C)	W
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +150	°C

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

■ Operating voltage

V_{IN}=+2.5V(In case of Vo<2.3V) ~ +(Vo+10V)

■ NJM2845

■ ELECTRICAL CHARACTERISTICS (V_{IN}=Vo+1V, C_{IN}=0.33µF, Co=2.2µF(Vo≤2.6V: Co=4.7µF), Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	Vo	Io=30mA	-1.0%	-	+1.0%	V
Quiescent Current	I_Q	Io=0mA	-	400	600	µA
Output Current	Io	Vo - 0.3V	800	1050	-	mA
Line Regulation	$\Delta Vo/\Delta V_{IN}$	V_{IN}=Vo+1V ~ Vo+6V, Io=30mA	-	-	0.10	%/V
Load Regulation	$\Delta Vo/\Delta Io$	Io=0 ~ 800mA	-	-	0.004	%/mA
Dropout Voltage(*2)	ΔV_{I-O}	Io=500mA	-	0.18	0.28	V
Ripple Rejection	RR	ein=200mVrms, f=1kHz, Io=10mA, Vo=3V Version	-	75	-	dB
Average Temperature Coefficient of Output Voltage	$\Delta Vo/\Delta Ta$	Ta=0 ~ 85°C, Io=10mA	-	±50	-	ppm/°C
Output Noise Voltage	V_{NO}	f=10Hz ~ 80kHz, Io=10mA, Vo=3V Version	-	45	-	µVrms

(*2): The output voltage excludes under 2.3V.


The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

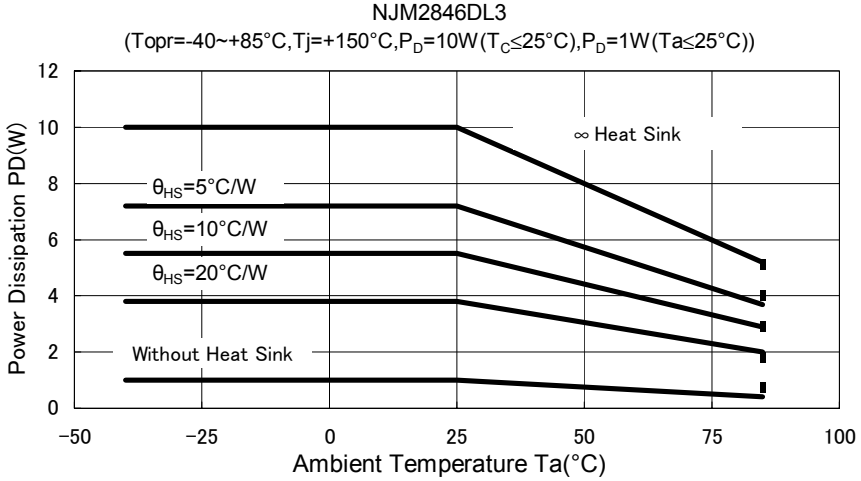


■ TEST CIRCUIT

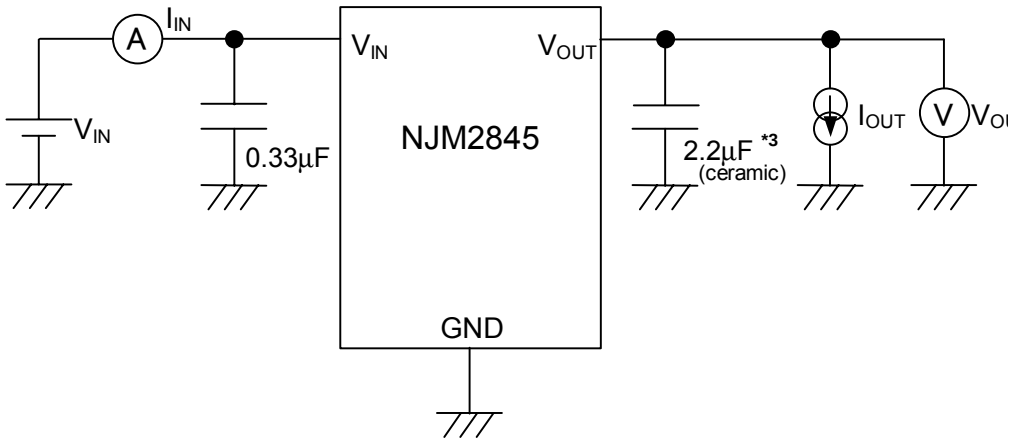

*3 Vo≤2.6V version: Co=4.7μF(ceramic)

■ TYPICAL APPLICATION

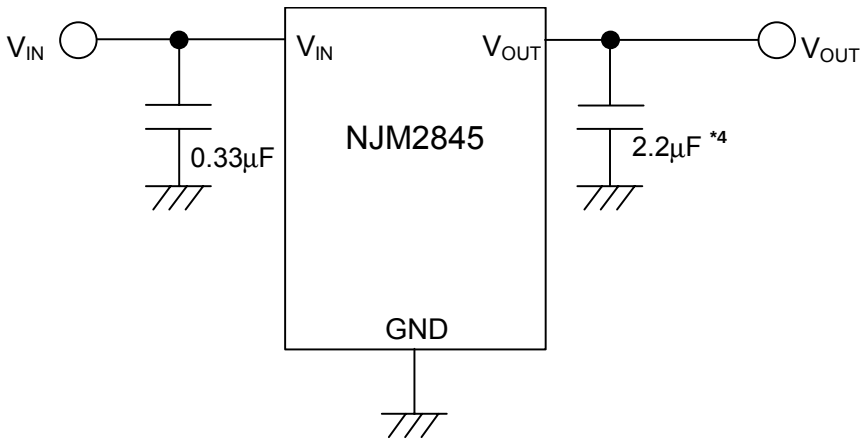

*4 Vo≤2.6V version: Co=4.7μF

■ NJM2846

■ ELECTRICAL CHARACTERISTICS (V_{IN}=Vo+1V, C_{IN}=0.33μF, Co=2.2μF(Vo≤2.6V: Co=4.7μF), Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	Vo	Io=30mA	-1.0%	-	+1.0%	V
Quiescent Current	I_Q	Io=0mA	-	400	600	μA
Quiescent Current at Control OFF	$I_{Q\,(OFF)}$	V_{CONT}=0V	-	-	100	nA
Line Regulation	Io	Vo - 0.3V	800	1050	-	mA
Line Regulation	$\Delta Vo/\Delta V_{IN}$	V_{IN}=Vo+1V ~ Vo+6V, Io=30mA	-	-	0.10	%/V
Load Regulation	$\Delta Vo/\Delta Io$	Io=0 ~ 800mA	-	-	0.004	%/mA
Dropout Voltage(*5)	ΔV_{I-O}	Io=500mA	-	0.18	0.28	V
Ripple Rejection	RR	ein=200mVrms, f=1kHz, Io=10mA, Vo=3V Version	-	75	-	dB
Average Temperature Coefficient of Output Voltage	$\Delta Vo/\Delta Ta$	Ta=0 ~ 85°C, Io=10mA	-	±50	-	ppm/°C
Output Noise Voltage	V_{NO}	f=10Hz ~ 80kHz, Io=10mA, Vo=3V Version	-	45	-	μVrms
Control Current	I_{CONT}	V_{CONT}=1.6V, Io=0mA	-	3	12	μA
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6	-	-	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$		-	-	0.6	V

(*5): The output voltage excludes under 2.3V.


The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

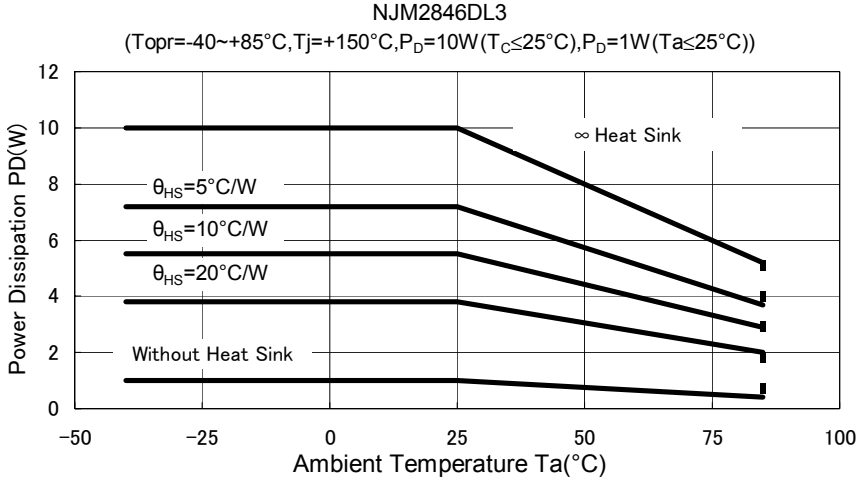


■ TEST CIRCUIT

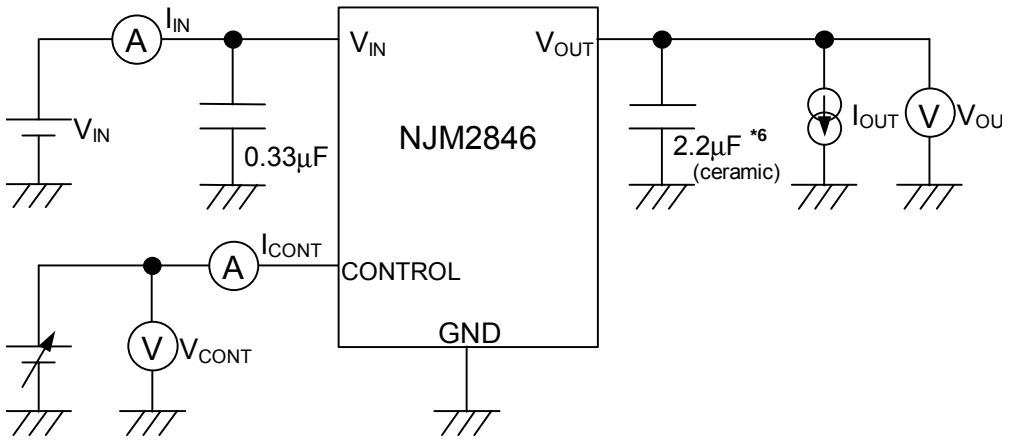

*6 Vo≤2.6V version: Co=4.7μF(ceramic)

■ TYPICAL APPLICATION

① In the case where ON/OFF Control is not required:

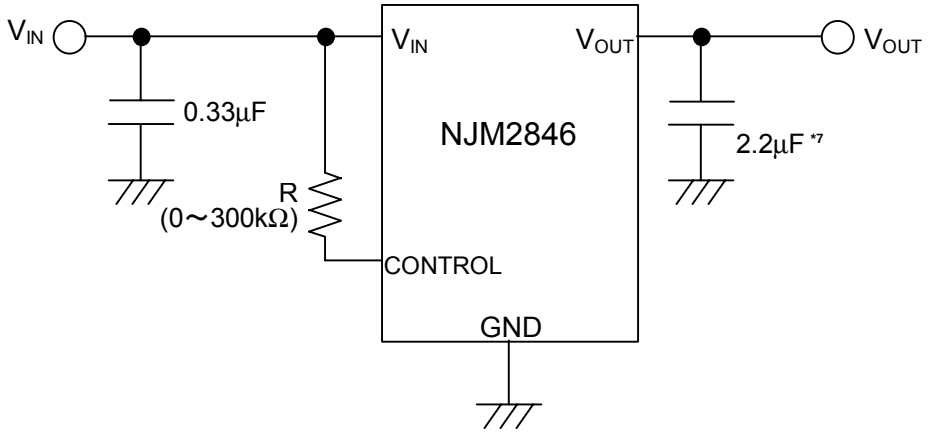


*7 Vo≤2.6V version: Co=4.7μF

Connect control terminal to V_{IN} terminal

The quiescent current can be reduced by using a resistance "R". Instead, it increases the minimum operating voltage. For further information, please refer to Figure "Output Voltage vs. Control Voltage".

② In use of ON/OFF CONTROL:

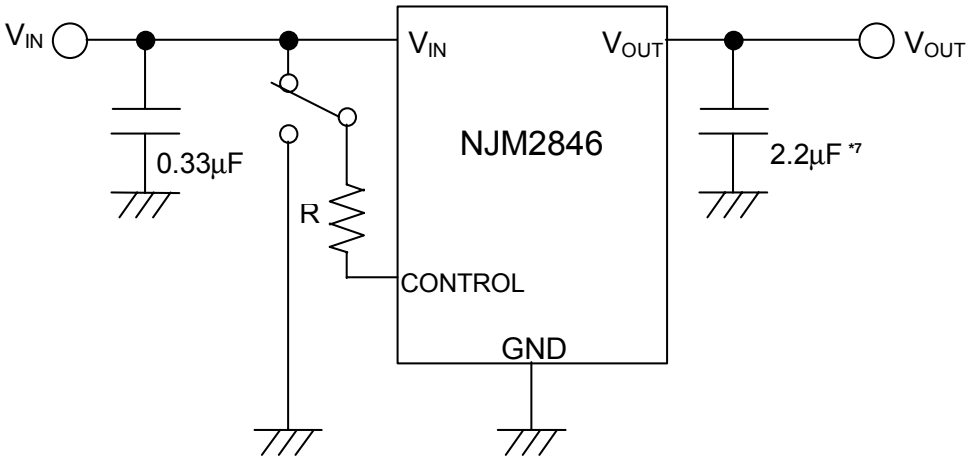



*7 Vo≤2.6V version: Co=4.7μF


State of control terminal:


- "H"→ output is enabled.
- "L" or "open" → output is disabled.


■ TYPICAL CHARACTERISTICS (NJM2845)

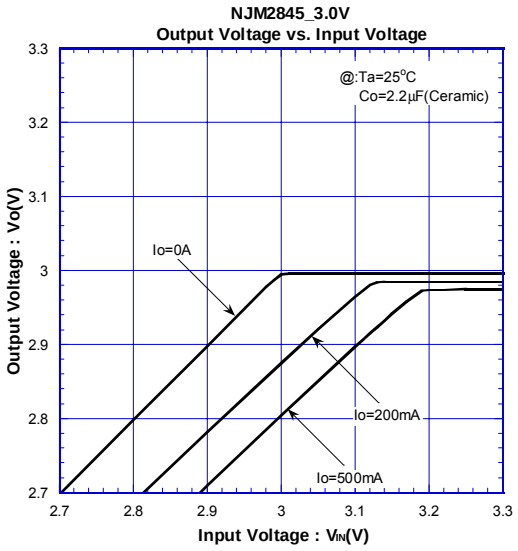


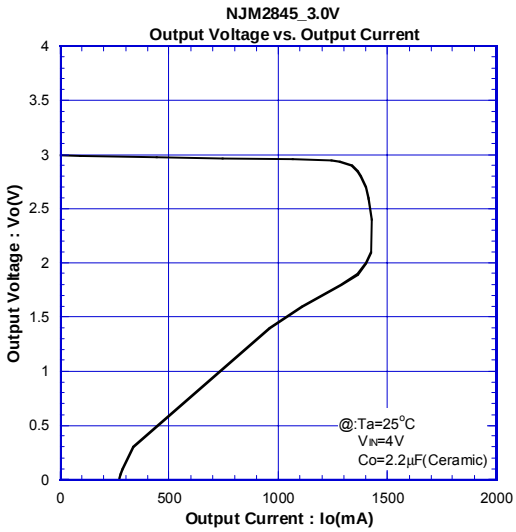

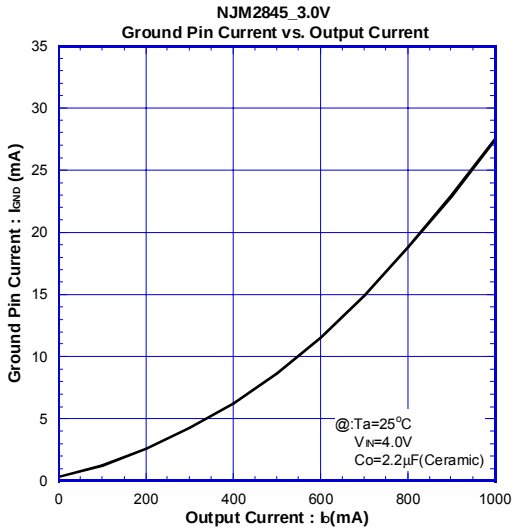


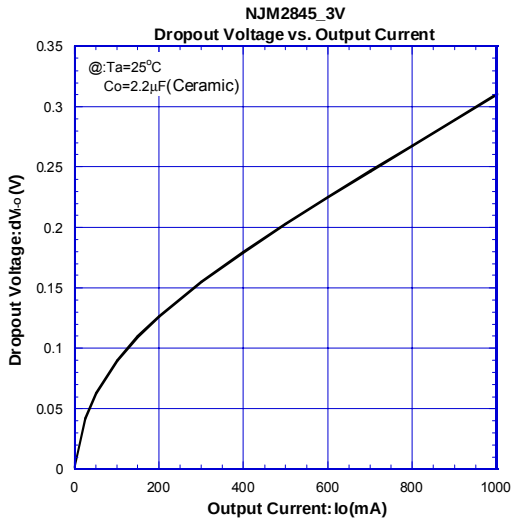


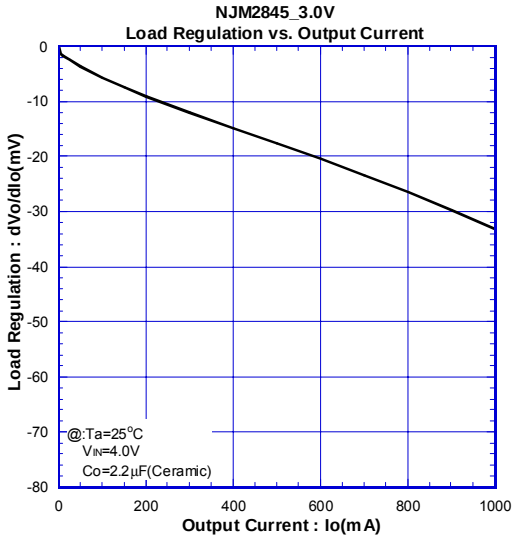


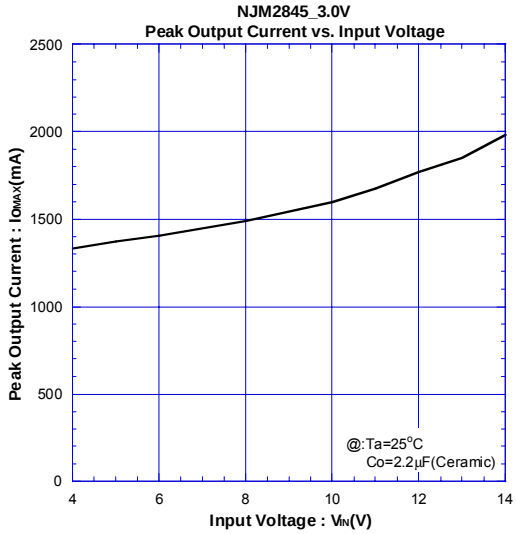



■ TYPICAL CHARACTERISTICS (NJM2845)

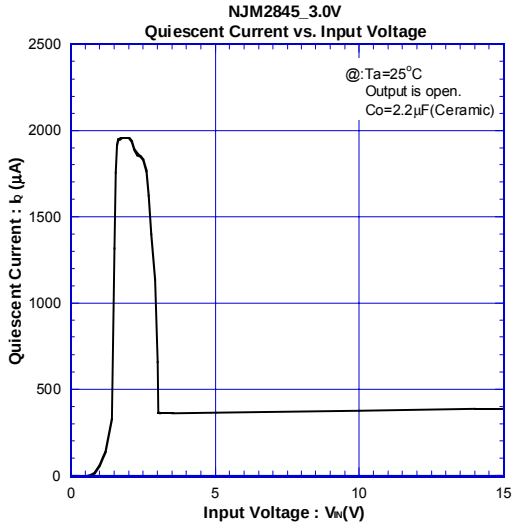


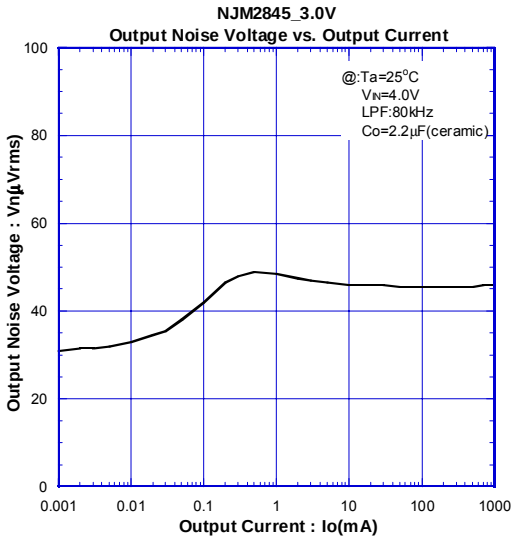

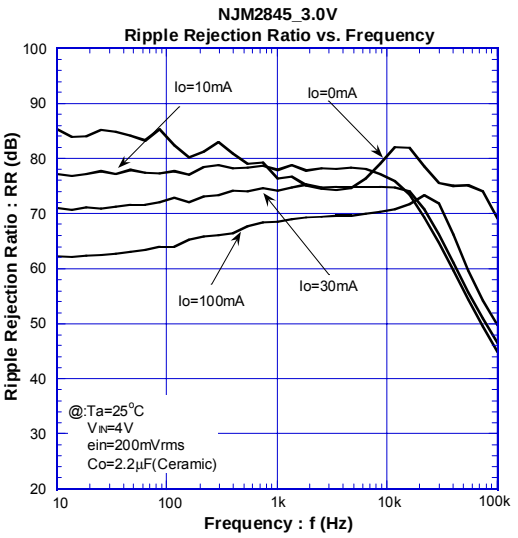


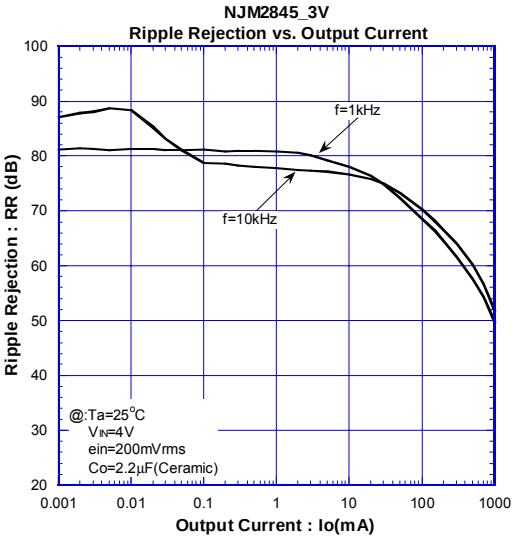


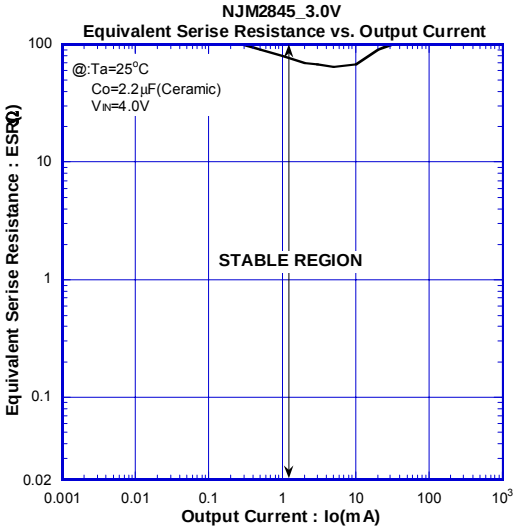


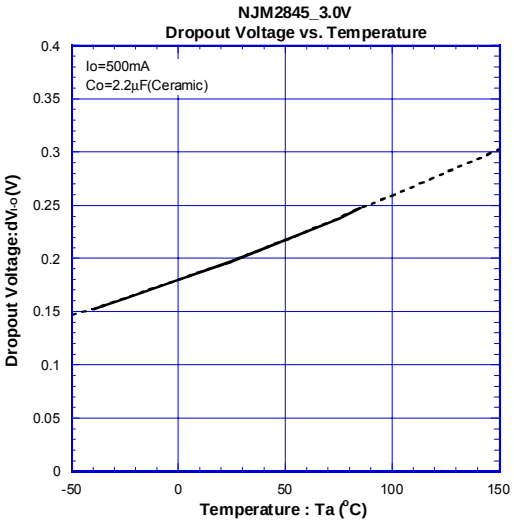



■ TYPICAL CHARACTERISTICS (NJM2845)

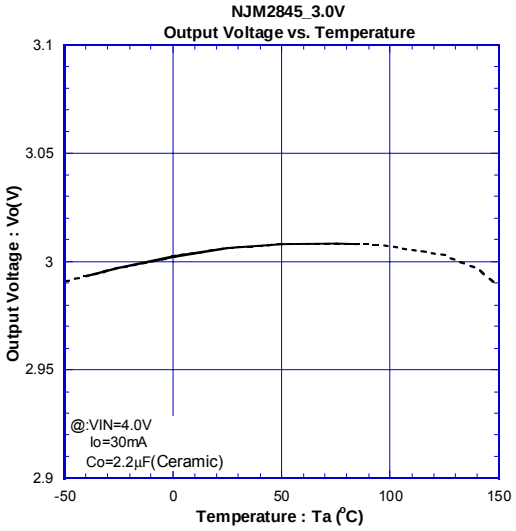


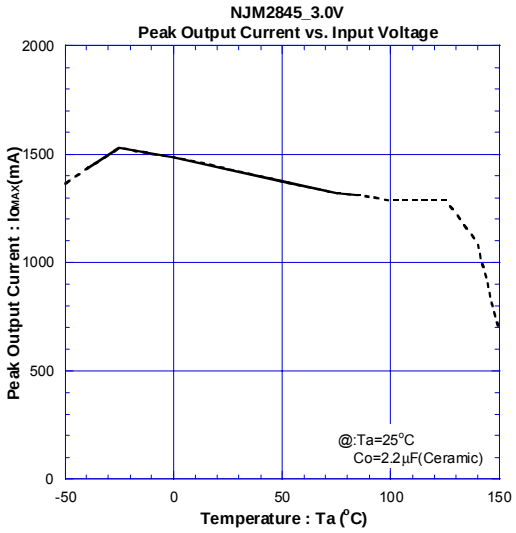

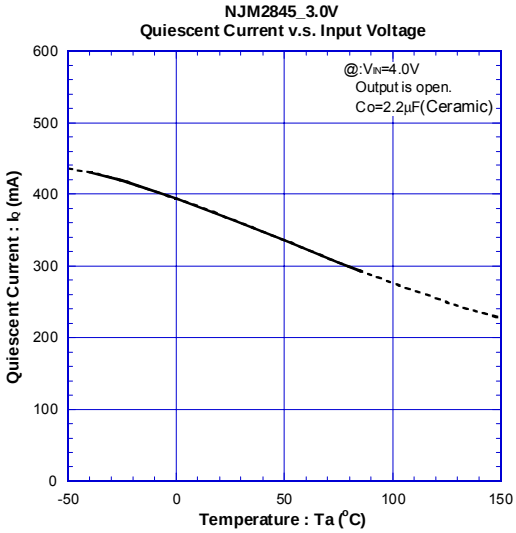


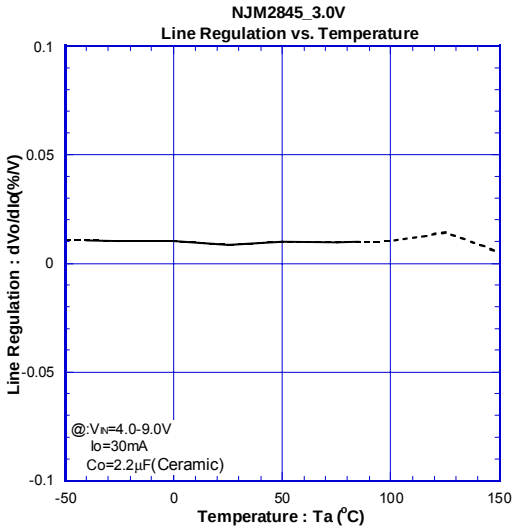


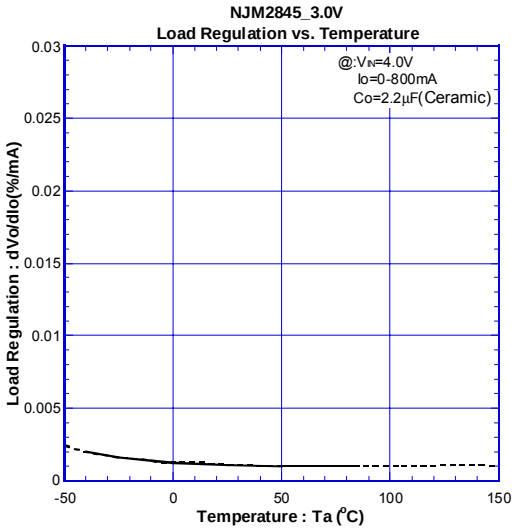


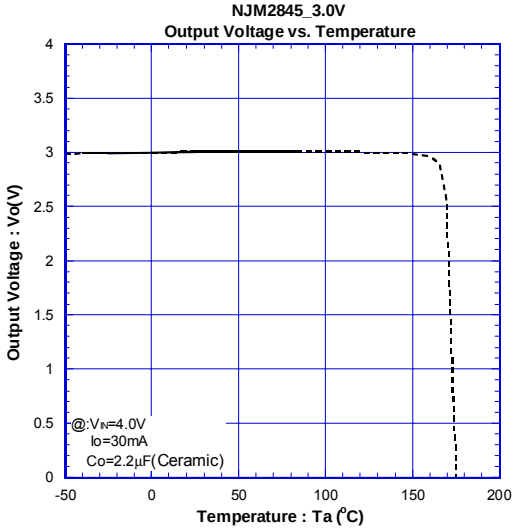


■ TYPICAL CHARACTERISTICS (NJM2845)

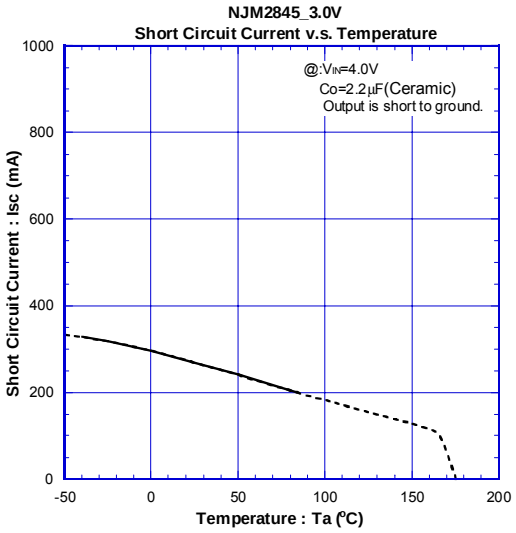


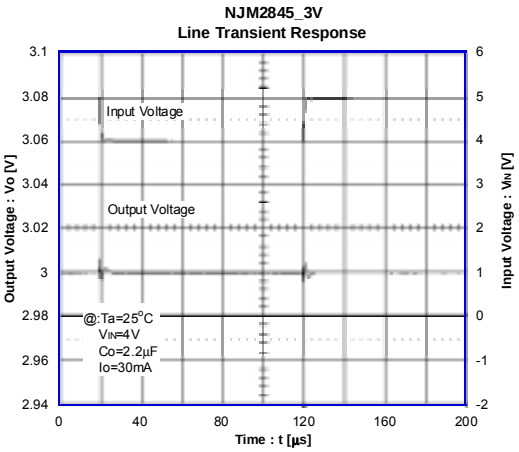


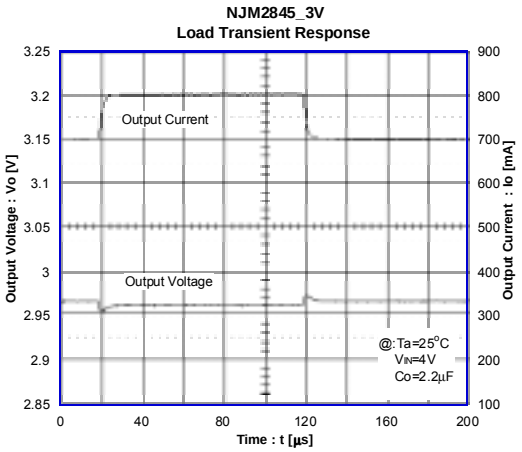



■ TYPICAL CHARACTERISTICS (NJM2846)

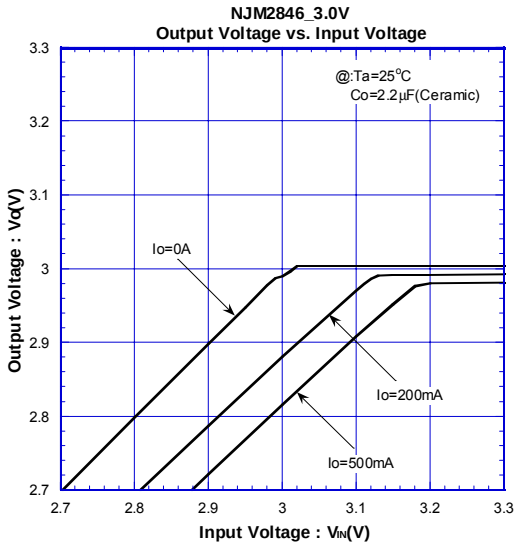


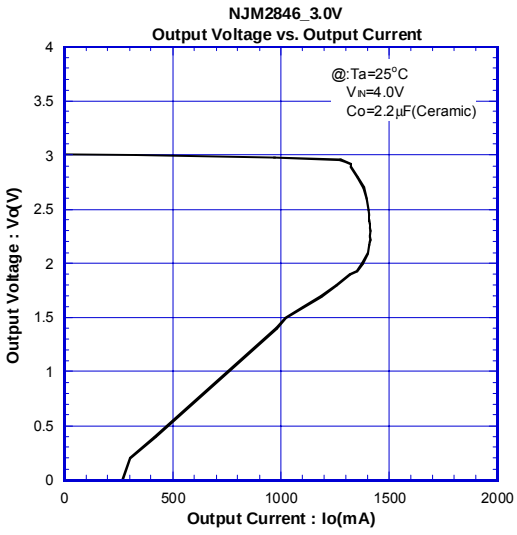

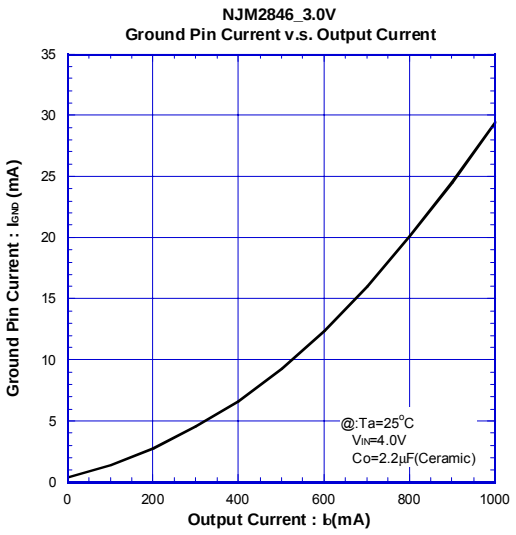


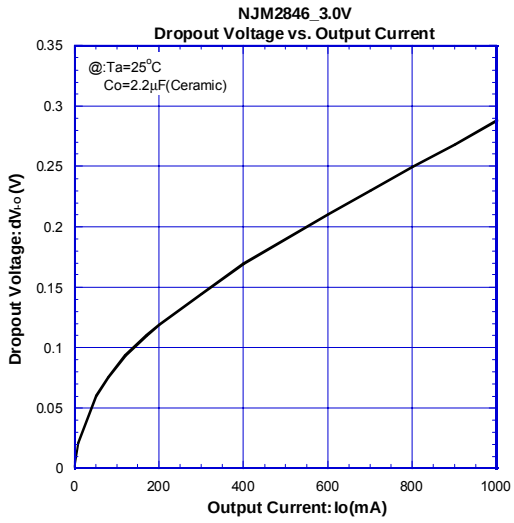


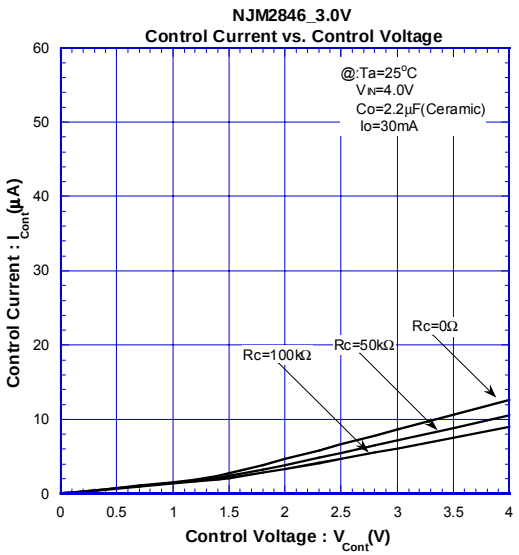


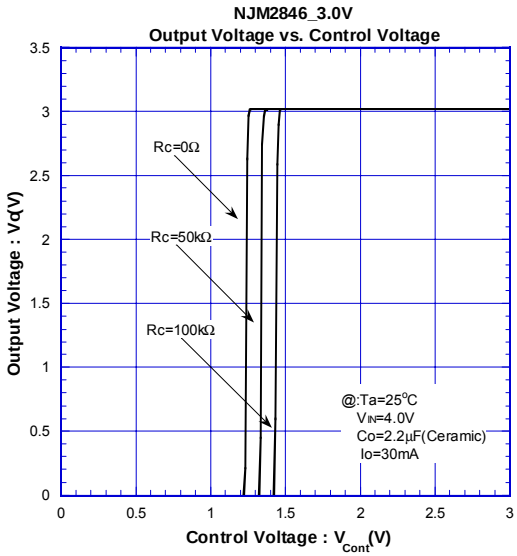



■ TYPICAL CHARACTERISTICS (NJM2846)

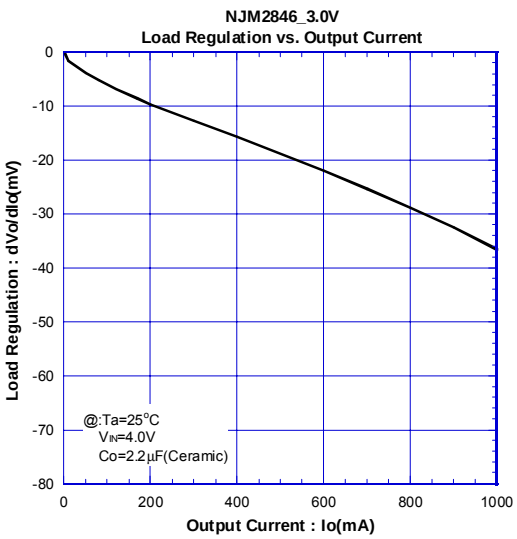


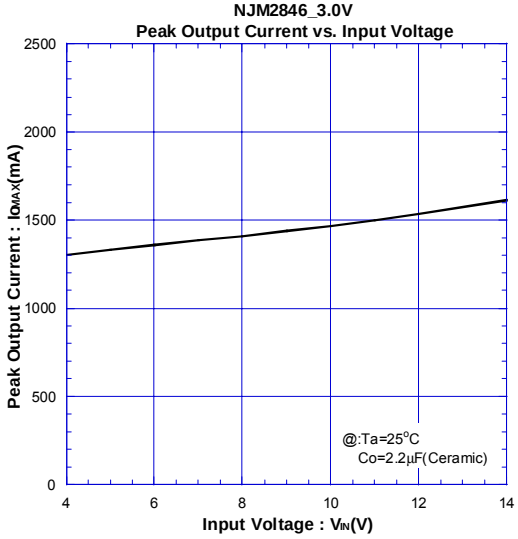

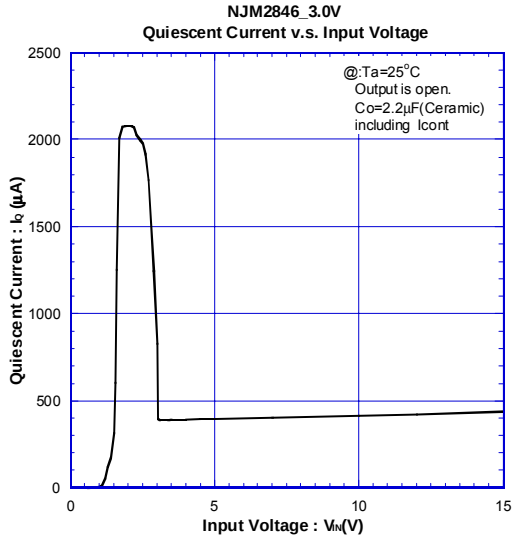

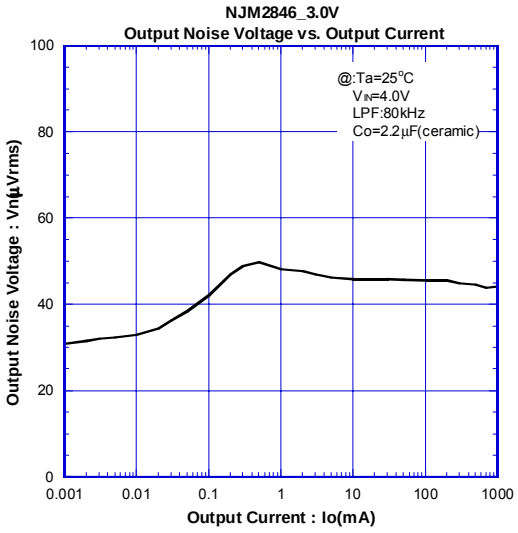


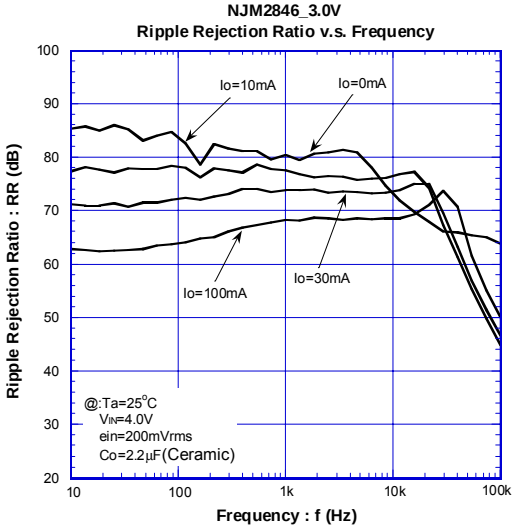

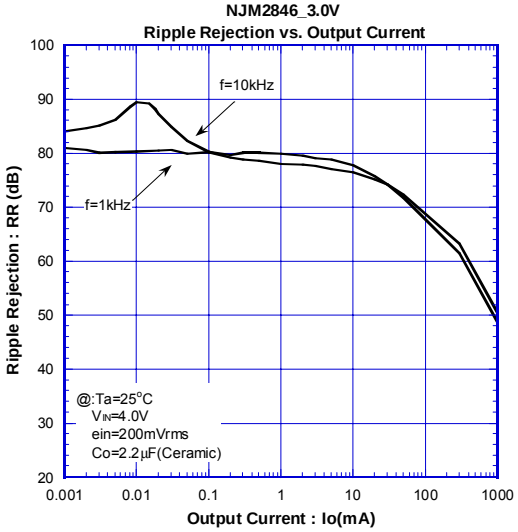


■ TYPICAL CHARACTERISTICS (NJM2846)


NJM2846_3.0V
Equivalent Serise Resistance vs. Output Current

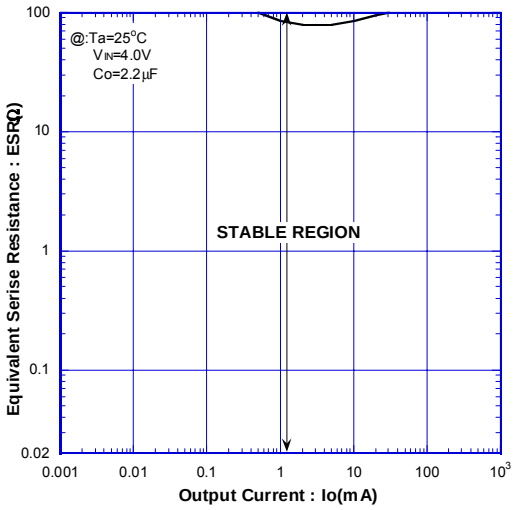


NJM2846_3.0V
Dropout Voltage vs. Output Current

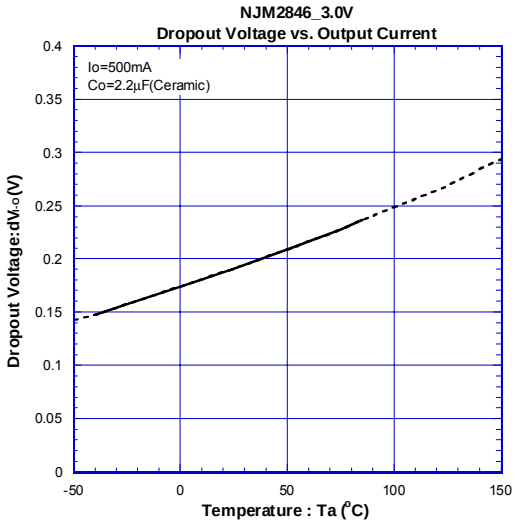


NJM2846_3.0V
Control Voltage v.s. Temperature

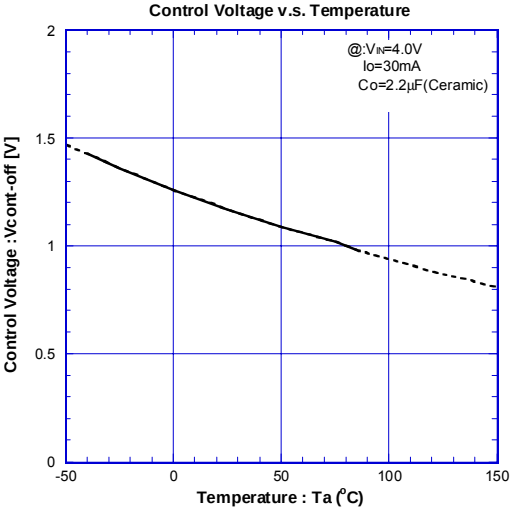


NJM2846_3.0V
Output Voltage vs. Temperature

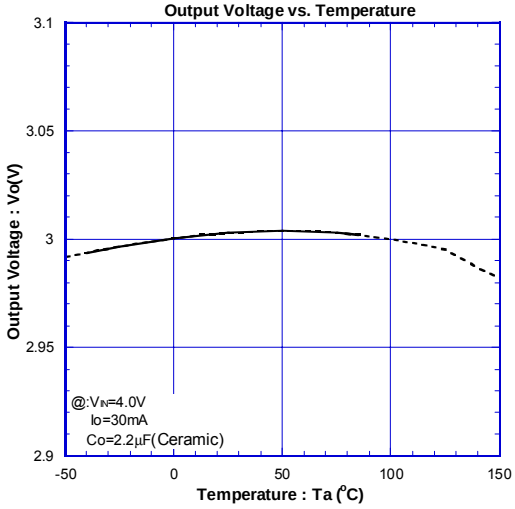


NJM2846_3.0V
Peak Output Current v.s. Temperature

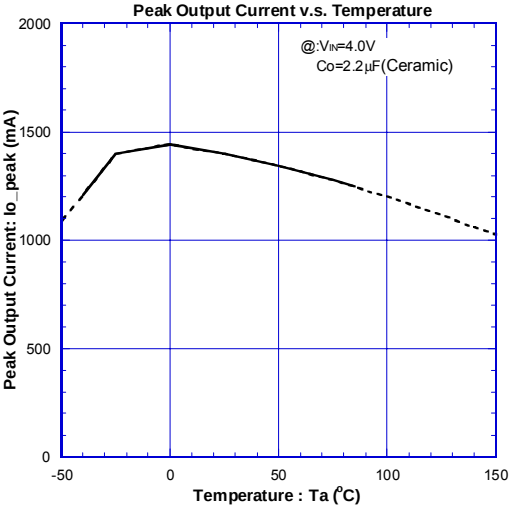



NJM2846_3.0V
Quiescent Current v.s. Input Voltage

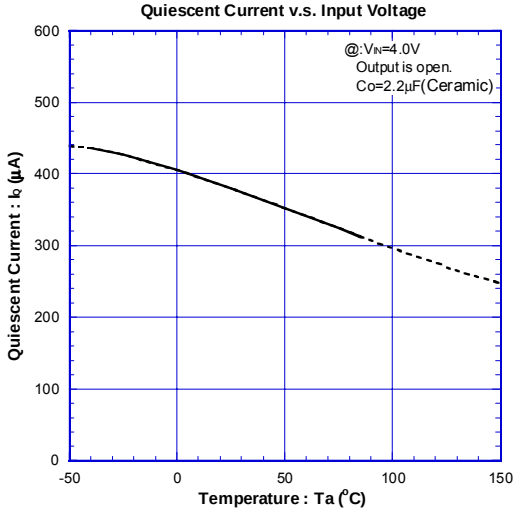



■ TYPICAL CHARACTERISTICS (NJM2846)

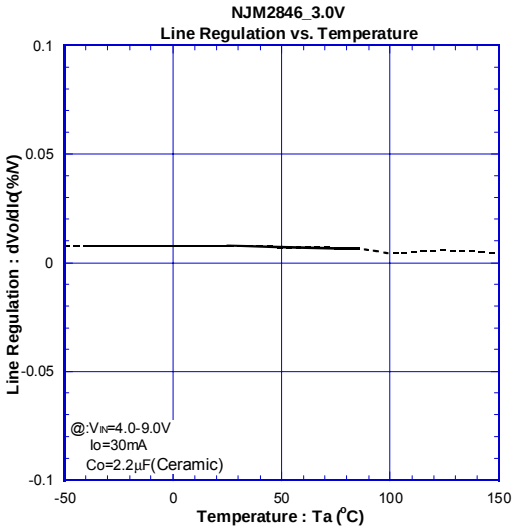


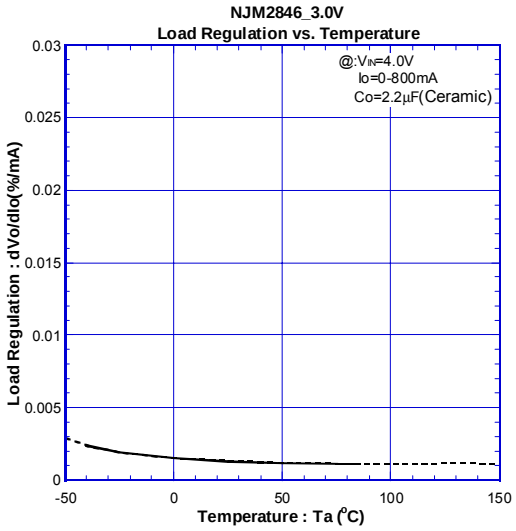

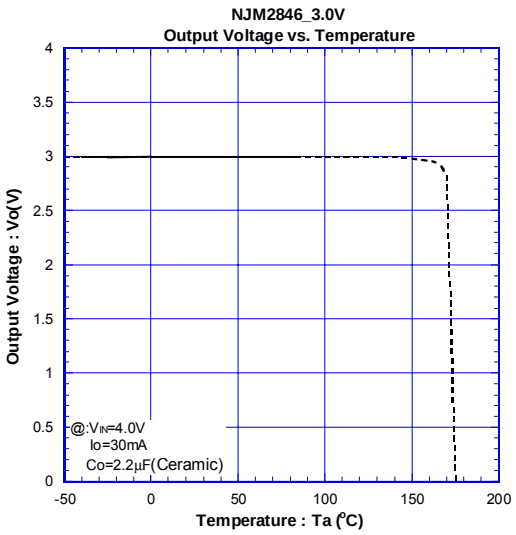


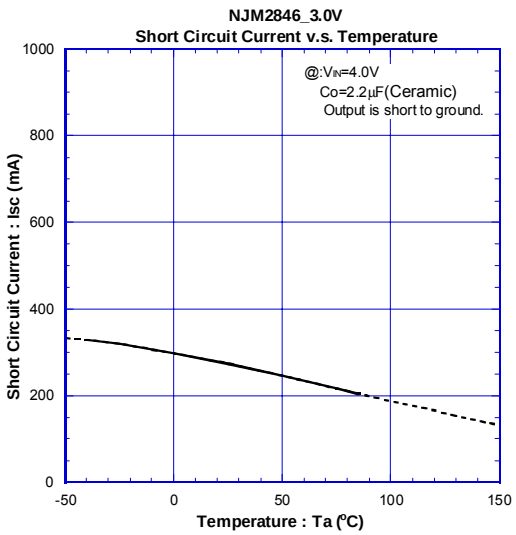


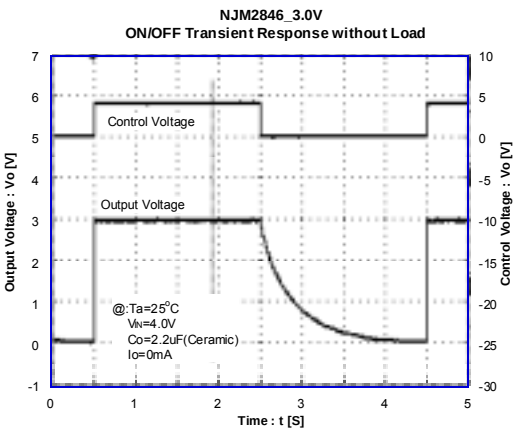

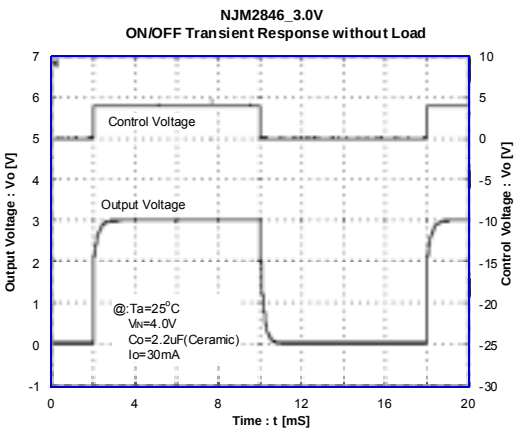

■ TYPICAL CHARACTERISTICS (NJM2846)

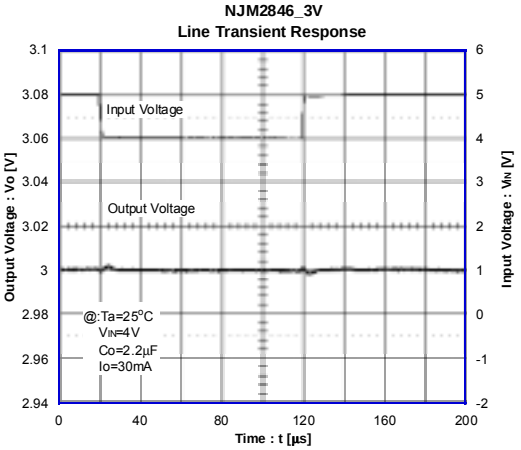

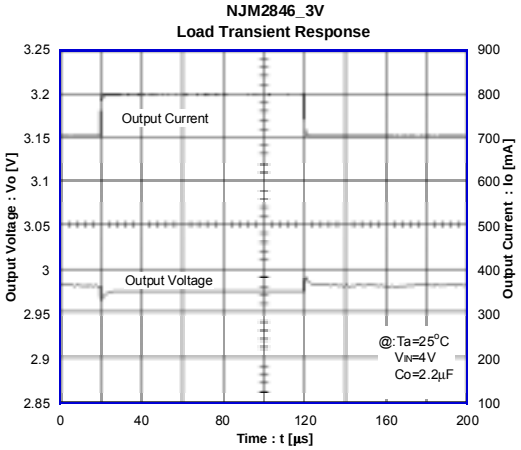

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.