Small Sized Quartz Crystal Oscillator

■GENERAL DESCRIPTION

The NJU6366 series is a C-MOS fundamental quartz crystal oscillator that consists of an oscillation amplifier, 3-stage divider and 3-state output buffer.

The 3-stage divider generates only one frequency selected of f_0,$f_0/2$,$f_0/4$ and $f_0/8$ by internal circuits is output.

The oscillation amplifier is realized very low stand-by current using NAND circuit.

The 3-state output buffer is C-MOS compatible

Furthermore, the package is small-sized MTP-6.

■PACKAGE OUTLINE



NJU6366XC-C




NJU6366XF1

■FEATURES


- ●Operating Voltage 2.0 to 5.5V
- ●Maximum Oscillation Frequency 50MHz
- ●Low Operating Current
- ●High Fan-out I_{OH}/I_{OL}=4mA @2.5V
- ●3-Stage Divider One of f_0,$f_0/2$,$f_0/4$ and $f_0/8$
- ●Oscillation Stop and Output Stand-by Function
- ●3-State Output Buffer
- ●Oscillation Capacitors Cg and Cg on-chip
- ●Package Outline Thin-Chip/MTP-6
- ●C-MOS Technology

■PAD LOCATION/PIN CONFIGURATION

Thin-Chip



MTP-6



■LINE-UP TABLE


Type No.		F_{OUT}	Internal Connect		Cg/Cd
			Connect	Non Connect	
NJU6366	A	f_0	A Line	B,C,D Line	23/23pF
	B	$f_0/2$	B Line	A,C,D Line	23/23pF
	C	$f_0/4$	C Line	A,B,D Line	23/23pF
	D	$f_0/8$	D Line	A,B,C Line	23/23pF

■COORDINATES

Pad Name	X	Y
F_{OUT}	-207	247
V_{SS}	-207	-247
XT	33	-247
$\overline{CONT}$	207	-247
V_{DD}	207	-17
$\overline{XT}$	207	172

Starting Point:Chip Center Unit[um]
Chip Size:0.67x0.75mm
Thin-Chip Thickness(-C):260±20um
Pad Size:90x90um

■BLOCK DIAGRAM

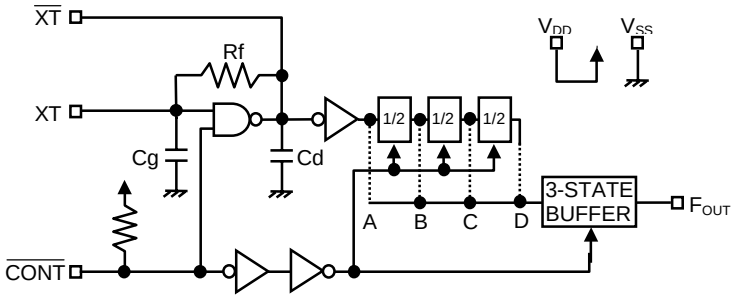

■TREMINAL DESCRIPTION

SYMBOL	FUNCTION	
$\overline{CONT}$	Oscillation and 3-state Output Buffer Control	
	$\overline{CONT}$	F_{OUT}
	H or OPEN	Output either one frequency selected of f_0, $f_0/2$,$f_0/4$ and $f_0/8$ Note1)
	L	Oscillation Stop and High impedance Output
XT	Quartz Crystal Connecting Terminals	
$\overline{XT}$		
V_{SS}	V_{SS}=0V	
F_{OUT}	Frequency Output	
V_{DD}	V_{DD}=2.5V/3.0V/5.0V	

Note1) Refer to the line-up table.

■ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{DD}	-0.5~+7.0	V
Input Voltage	V_{IN}	V_{SS}-0.5~V_{DD}+0.5	V
Output Voltage	V_O	-0.5~V_{DD}+0.5	V
Input Current	I_{IN}	±10	mA
Output Current	I_O	±25	mA
Power Dissipation Note4)	P_D	200(MTP-6)	mW
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-55~+125	°C

Note2) If the supply voltage(V_{DD}) is less than 7.0V, the input voltage must not over the V_{DD} level though 7.0V is limit specified.

Note3) Decupling capacitor should be connected between V_{DD} and V_{SS} due to the stabilized operation for the circuit.

Note4) The power dissipation is the maximum value at only the package.

■ELECTRICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	V_{DD}		2.0		5.5	V

(V_{DD}=2.5V,Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	A version,fosc=16MHz,C_L=15pF			5	mA
		B version,fosc=16MHz,C_L=15pF			4	
		C version,fosc=16MHz,C_L=15pF			3	
		D version,fosc=16MHz,C_L=15pF			3	
Oscillation Stopping Current	I_{STB}	$\overline{CONT}$ =V_{SS}, No load		2	5	uA
Stand-by Current	Ist	$\overline{CONT}$ =XT=V_{SS}, No load Note5)			1	uA
Input Voltage	V_{IH}		2.0		2.5	V
	V_{IL}		0		0.5	V
Output Current	I_{OH}	V_{OH}=2.2V	4			mA
	I_{OL}	V_{OL}=0.3V	4			mA
Input Current	I_{IN}	$\overline{CONT}$ =0.8V_{DD}		7.5	12.0	uA
		$\overline{CONT}$ =0.2V_{DD}		1.2	2.0	uA
3-state Off Leakage Current	I_{OZ}	$\overline{CONT}$ =V_{SS}, F_{OUT}= V_{DD} or V_{SS}			±0.1	uA
Feedback Resistance	Rf			227		kΩ
Internal Capacitor	Cg/Cd	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	C_L=15pF, @V_{DD}/2	45	50	55	%
		C_L=30pF, @V_{DD}/2	45	50	55	
Output Signal Rise Time	tr	C_L=15pF,10%~90%		3	6	ns
		C_L=30pF,10%~90%		3	6	
Output Signal Fall Time	tf	C_L=15pF,90%~10%		3	6	ns
		C_L=30pF,90%~10%		3	6	
Output Disable time	T_{PLZ}	C_L=15pF,R_{UP}=10kΩ			250	ns
Output Enable Time	T_{PZL}	C_L=15pF,R_{UP}=10kΩ			250	ns

Note5) Excluding input current on $\overline{CONT}$ Terminal.

(V_{DD}=3.0V,Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	A version,fosc=16MHz,C_L=15pF			6	mA
		B version,fosc=16MHz,C_L=15pF			5	
		C version,fosc=16MHz,C_L=15pF			4	
		D version,fosc=16MHz,C_L=15pF			4	
Oscillation Stopping Current	I_{STB}	$\overline{CONT}$ =V_{SS}, No load		2	5	uA
Stand-by Current	Ist	$\overline{CONT}$ =XT=V_{SS}, No load Note5)			1	uA
Input Voltage	V_{IH}		2.4		3.0	V
	V_{IL}		0		0.6	V
Output Current	I_{OH}	V_{OH}=2.7V	5			mA
	I_{OL}	V_{OL}=0.3V	5			mA
Input Current	I_{IN}	$\overline{CONT}$ =0.8V_{DD}		10.0	15.0	uA
		$\overline{CONT}$ =0.2V_{DD}		1.8	3.0	uA
3-state Off Leakage Current	I_{OZ}	$\overline{CONT}$ =V_{SS}, F_{OUT}= V_{DD} or V_{SS}			±0.1	uA
Feedback Resistance	Rf			227		kΩ
Internal Capacitor	Cg/Cd	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	C_L=15pF, @V_{DD}/2	45	50	55	%
		C_L=30pF, @V_{DD}/2	45	50	55	
Output Signal Rise Time	tr	C_L=15pF,10%~90%		3	6	ns
		C_L=30pF,10%~90%		3	6	
Output Signal Fall Time	tf	C_L=15pF,90%~10%		3	6	ns
		C_L=30pF,90%~10%		3	6	
Output Disable time	T_{PLZ}	C_L=15pF,R_{UP}=10kΩ			200	ns
Output Enable Time	T_{PZL}	C_L=15pF,R_{UP}=10kΩ			200	ns

Note5) Excluding input current on $\overline{CONT}$ Terminal.


(V_{DD}=5.0V,Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	A version,fosc=16MHz,C_L=15pF			10	mA
		B version,fosc=16MHz,C_L=15pF			9	
		C version,fosc=16MHz,C_L=15pF			9	
		D version,fosc=16MHz,C_L=15pF			8	
Oscillation Stopping Current	I_{STB}	$\overline{CONT}$ =V_{SS}, No load		5	10	uA
Stand-by Current	Ist	$\overline{CONT}$ =XT=V_{SS}, No load Note5)			1	uA
Input Voltage	V_{IH}		3.5		5.0	V
	V_{IL}		0		1.5	V
Output Current	I_{OH}	V_{OH}=4.5V	8			mA
	I_{OL}	V_{OL}=0.5V	8			mA
Input Current	I_{IN}	$\overline{CONT}$ =0.8V_{DD}		27.0	40.0	uA
		$\overline{CONT}$ =0.2V_{DD}		5.5	8.0	uA
3-state Off Leakage Current	I_{OZ}	$\overline{CONT}$ =V_{SS}, F_{OUT}= V_{DD} or V_{SS}			±0.1	uA
Feedback Resistance	Rf			227		kΩ
Internal Capacitor	Cg/Cd	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	C_L=15pF, @V_{DD}/2	45	50	55	%
		C_L=30pF, @V_{DD}/2	45	50	55	
Output Signal Rise Time	tr	C_L=15pF,10%~90%		3	6	ns
		C_L=30pF,10%~90%		3	6	
Output Signal Fall Time	tf	C_L=15pF,90%~10%		3	6	ns
		C_L=30pF,90%~10%		3	6	
Output Disable time	T_{PLZ}	C_L=15pF,R_{UP}=10kΩ			100	ns
Output Enable Time	T_{PZL}	C_L=15pF,R_{UP}=10kΩ			100	ns


Note5) Excluding input current on $\overline{CONT}$ Terminal.

■MEASURMENT CIRCUITS


(1)Output Signal Symmetry(C_L=15pF)

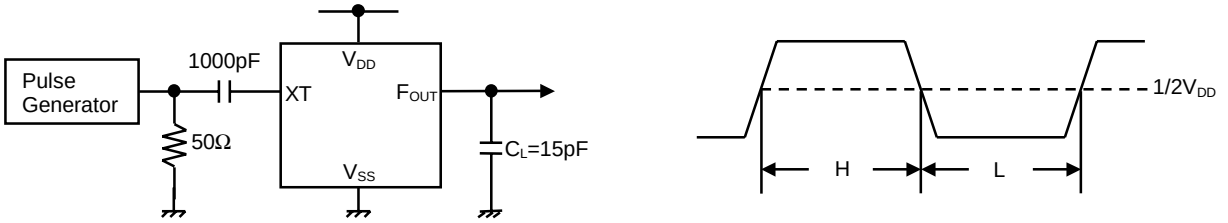

(2)Output Signal Rise/Fall Time(C_L=15pF)

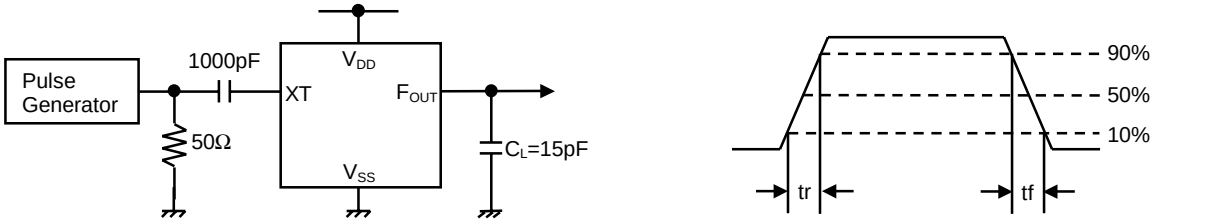

(3)Output Disable/Enable Time(C_L=15pF,R_{UP}=10kΩ)

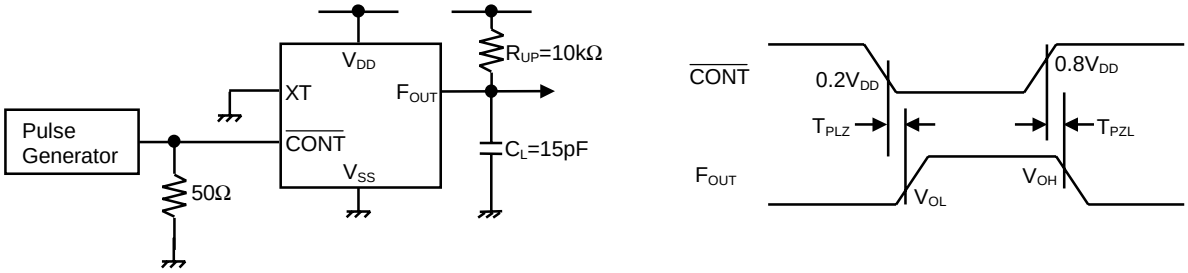

[CAUTION]
The specifications on this data book are only given for information , without any guarantee as regards either mistakes or omissions.
The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.