


Broadband Microwave Coaxial Noise Sources

NMA2218-A1T

1 GHz to 18 GHz

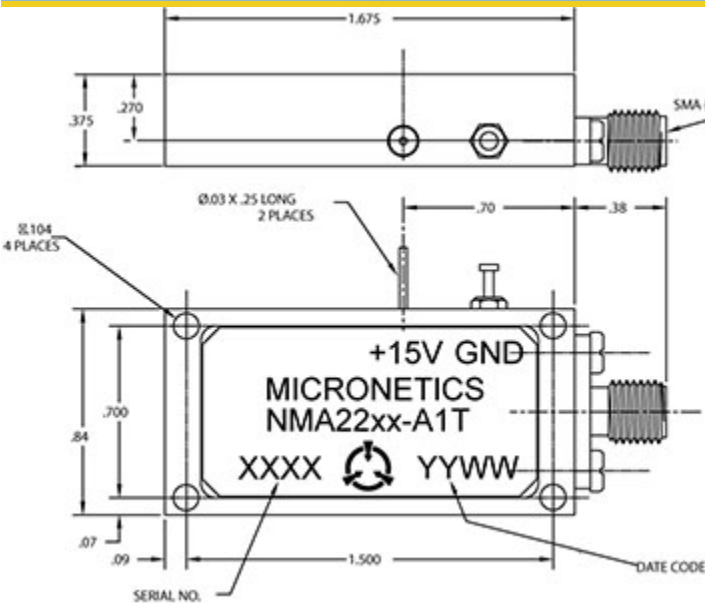

Specifications

RF Frequency	1 GHz to 18 GHz
Noise Output	32 to 35 dB ENR
Noise Spectral Density (N_0)	-140.5 dBm/Hz Min
Flatness	2 dB P-P Max
VSWR	2.0:1 Max
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	70 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	T Package
Connector Type	SMA(f)

Environmental

Operating Temperature	-40 to 85 °C
Storage Temperature	-55 to 125 °C

Notes

No TTL control

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

