Leiditech

NSM016


Features

- ☐ Small size of 1206
- ☐ Lead-free and compliant with the European Union RoHS Directive 2011/65/EU
- ☐ Fast tripping resettable circuit protection
- ☐ Surface mount packaging for automated assembly
- ☐ Agency Recognition: UL、CSA、TUV



Product Dimensions (mm)

Part number	A	B	C	D	E	Part marking
	Max.	Max.	Max.	Min.	Min.	
NSM016	3.50	1.80	0.85	0.25	0.10	T

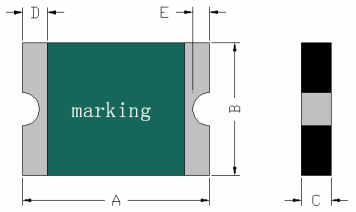


Top View Side View


Electrical Characteristics

Part number	I_H	I_T	V_{max}	I_{max}	T_{trip}		Pd_{typ}	R_{min}	R_{1max}
	(A)	(A)	(V)	(A)	Current(A)	Time(S)	(W)	(Ω)	(Ω)
NSM016	0.16	0.37	30	20	1.0	0.30	0.6	1.20	4.50

I_H=Hold current: maximum current at which the device will not trip at 25℃ still air.
I_T=Trip current: minimum current at which the device will always trip at 25℃ still air.
V_{max}=Maximum voltage device can withstand without damage at rated current.
I_{max}=Maximum fault current device can withstand without damage at rated voltage.
T_{trip}=Maximum time to trip(s) at assigned current.
Pd_{typ}=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.
R_{min}=Minimum device resistance at 25℃ prior to tripping.
R_{1max}=Maximum device resistance measured in the nontripped state 1 hour post reflow.

Solder Reflow Recommendations



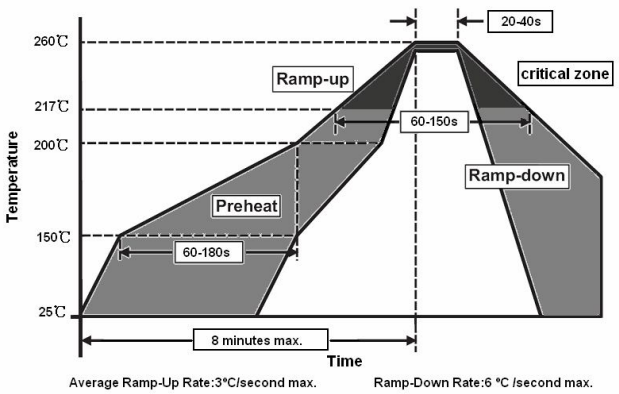

Solder Pad Layouts

Part number	A	B	C
	(mm)	(mm)	(mm)
NSM016	1.80	1.00	1.80

* Recommended reflow methods: IR, Vapor phase, hot air oven.
* Devices can be cleaned using standard industry methods and solvents.

Notes:

- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- Devices are not designed to be wave soldered to the bottom side of the board.

Package Information

Tape & Reel: 4000pcs per reel.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.
Specifications are subject to change without notice

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059

Download from Alldatasheet.com