



19.5×15.3×15.3

NT73-2



CH0050406—2000



E158859



LR814321



R9858271

Patent No.: 95 2 18643.8

Features

- Small size, light weight, heavy reverse power.
- Low coil power consumption.
- PC board mounting.
- Suitable for automation control, telecommunication equipment, household electrical appliance and machinery electrical facilities.

Ordering Information

NT73-2 **C** **S** **10** **DC12V** **0.36**

1 2 3 4 5 6

- 1 Part number: NT73-2

2 Contact arrangement: A:1A; B:1B; C:1C

3 Enclosure: S: Sealed type; NIL: Dust cover
- 4 Contact rating: 5A,10A,12A,15A/125VAC 28VDC; 6A/277VAC 20A/125VAC 16VDC10A/250VAC (0.8W); **Tüv**:6A/250VAC 28VDC

5 Coil rated Voltage(V): DC:3,5,6,9,12,24,48

6 Coil power consumption: 0.36:0.36W; 0.45:0.45W; 0.8:0.8W

Contact Data

Contact Arrangement	1A (SPSTNO)、1B (SPSTNC)、1C (SPDT(B-M))		
Contact Material	Ag·CdO Ag·SnO ₂		
Contact Rating (resistive)	5A,6A,10A,12A,15A/125VAC,28VDC;20A/125VAC,16VDC; 6A/277VAC;10A/250VAC		
	TüV : 6A/250VAC, 28VDC (15A 0.4W ; 20A 0.8W coil only)		
	Motor load: 1/3HP 125VAC ; 1/3HP 277VAC		
Max. Switching Power	420W 2500VA		
Max. Switching Voltage	110VDC 380VAC		
Contact Resistance or Voltage drop	≤100mΩ		
Operation life	Electrical	10 ⁵	
	Mechanical	10 ⁷	
		Max. Switching Current:20A	
		Item 3.12 of IEC255-7	
		Item 3.30 of IEC255-7	
		Item 3.31 of IEC255-7	

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω±10%	Pickup voltage VDC(max) (75%of rated voltage)	release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
003-360	3	3.9	25	2.25	0.3	0.36	≤10	≤5
005-360	5	6.5	70	3.75	0.5			
006-360	6	7.8	100	4.50	0.6			
009-360	9	11.7	225	6.75	0.9			
012-360	12	15.6	400	9.00	1.2			
024-360	24	31.2	1600	18.0	2.4			
048-360	48	62.4	6400	36.0	4.8			
003-450	3	3.9	20	2.25	0.3	0.45	≤10	≤5
005-450	5	6.5	55.6	3.75	0.5			
006-450	6	7.8	80	4.50	0.6			
009-450	9	11.7	180	6.75	0.9			
012-450	12	15.6	320	9.00	1.2			
024-450	24	31.2	1280	18.0	2.4			
048-450	48	62.4	5120	36.0	4.8			
003-800	3	3.9	11	2.25	0.3	0.80	≤10	≤5
005-800	5	6.5	31	3.75	0.5			
006-800	6	7.8	45	4.50	0.6			
009-800	9	11.7	101	6.75	0.9			
012-800	12	15.6	180	9.00	1.2			
024-800	24	31.2	720	18.0	2.4			
048-800	48	62.4	2880	36.0	4.8			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance	250M Ω min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength		
Between contacts	50Hz 750V	Item 6 of IEC255-5
Between contact and coil	50Hz 1500V	Item 6 of IEC255-5
Shock resistance	100m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~55Hz double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	5N	IEC68-2-21 Test Ua1
Solderability	235℃ $\pm$ 2℃ 3 $\pm$ 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-55~85℃	
Relative Humidity	93% (at 40℃)	IEC68-2-3Test Ca
Mass	9.5g	


Qualification inspection:

Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Safety approvals

Safety approval	UL	TüV	CCEE
Load	20A/125VAC 16VDC 10A/250VAC 6A/277VAC 1/3HP 125VAC/277VAC Insulation: B-class F-class	6A/250VAC 28VDC	7A/250VAC

Dimensions (Unit: mm)

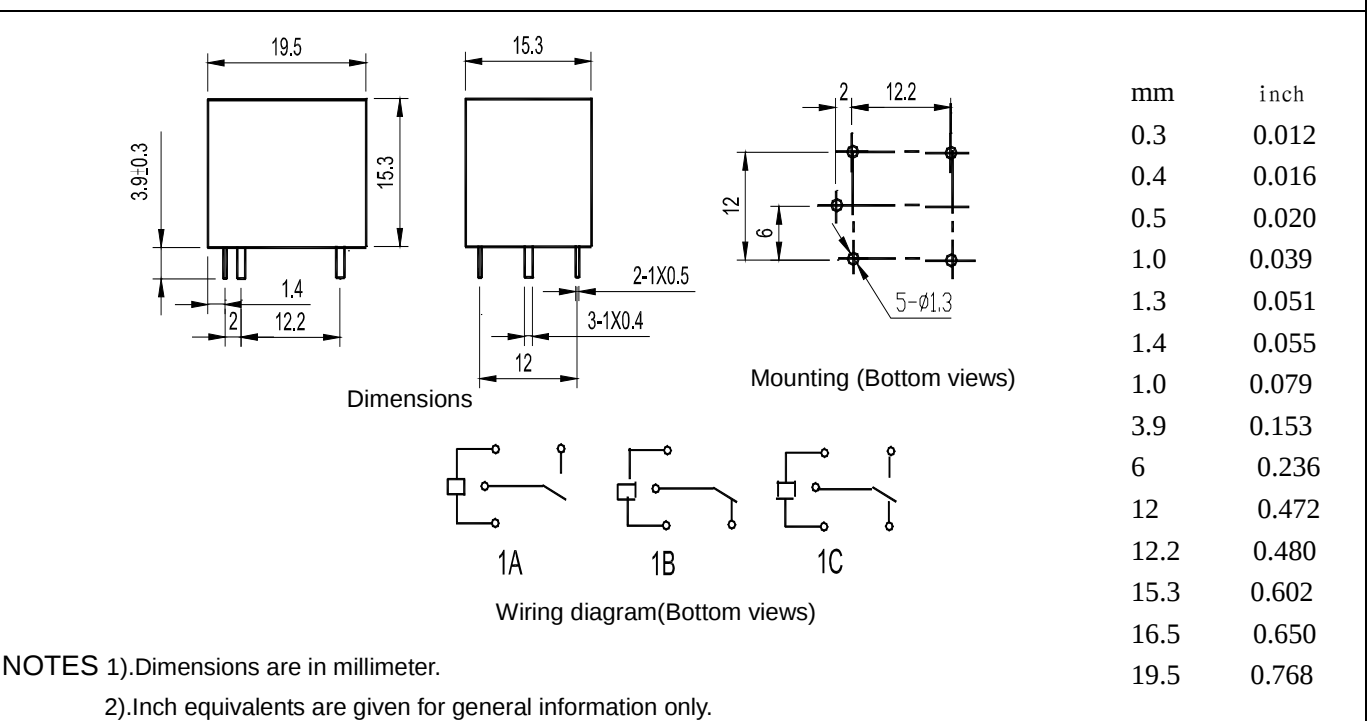

Reference Data

