



NEC's 1310 nm InGaAsP MQW FP LASER DIODE IN COAXIAL PACKAGE FOR 155 Mb/s APPLICATION

NX7303BA-CC
NX7303CA-CC

FEATURES

- **CENTER WAVELENGTH:**
 $\lambda_c = 1310 \text{ nm}$
- **OPTICAL OUTPUT POWER:**
 $P_f = 1.0 \text{ mW}$
- **LOW THRESHOLD CURRENT:**
 $I_{TH} = 9 \text{ mA}$
- **HIGH CUTOFF FREQUENCY:**
 $f_c = 2.0 \text{ GHz}$
- **InGaAs MONITOR PIN-PD**
- **WITH SC-UPC CONNECTOR**
- **WIDE OPERATING TEMPERATURE RANGE:**
 $-40 \text{ to } +85^\circ\text{C}$
- **BASED ON TELCORDIA RELIABILITY**

DESCRIPTION

NEC's NX7303BA-CC and NX7303CA-CC are 1310 nm Fabry-Perot (FP) laser diode coaxial modules with single mode fiber. They have a Multiple Quantum Well (MQW) structure and a built-in InGaAs monitor photo diode. These modules are ideal as a light source for Synchronous Digital Hierarchy (SDH) systems, STM-1 and long-haul L-1.1 ITU-T recommendations.

ELECTRO-OPTICAL CHARACTERISTICS ($T_c = -40 \text{ to } +85^\circ\text{C}$, unless otherwise specified)

PART NUMBER			NX7303BA-CC, NX7303CA-CC		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
P_f	Optical Output Power from Fiber	mW		1.0	
V_{OP}	Operating Voltage, $P_f = 1.0 \text{ mW}$	V		1.2	1.5
I_{TH}	Threshold Current	$T_c = +25^\circ\text{C}$	4	9	20
			2		50
P_{TH}	Threshold Output Power, $I_f = I_{TH}$	μW			75
I_{MOD}	Modulation Current	$P_f = 1.0 \text{ mW}$, $T_c = 25^\circ\text{C}$	8	15	35
		$P_f = 1.0 \text{ mW}$	5		60
η_d	Differential Efficiency	$P_f = 1.0 \text{ mW}$, $T_c = 25^\circ\text{C}$	0.030	0.070	0.100
		$P_f = 1.0 \text{ mW}$	0.018		0.150
$\Delta\eta_d$	Temperature Dependence of Differential Efficiency, $\Delta\eta_d = 10 \log \frac{\eta_d (@ T_c ^\circ\text{C})}{\eta_d (@ 25 ^\circ\text{C})}$		-3	-2	
Kink	Kink, $P_f = \text{Up to } 1.2 \text{ mW}$ (Refer to Definitions)	%			± 20
λ_c	Center Wavelength, $P_f = 1.0 \text{ mW}$, RMS (-20 dB)	nm	1263	1310	1360
$\Delta\lambda/\Delta T$	Temperature Dependence of Center Wavelength	nm/ $^\circ\text{C}$		0.4	0.5
σ	Spectral Width, $P_f = 1.0 \text{ mW}$, RMS (-20 dB)	nm		1.3	4.0
f_c	Cut-off Frequency, -3 dB	GHz		2.0	
t_r	Rise Time, 10 to 90%, $P_{pk} = 1.0 \text{ mW}$, $I_f = I_{TH}$	ns		0.2	0.5
t_f	Fall Time, 90 to 10%, $P_{pk} = 1.0 \text{ mW}$, $I_f = I_{TH}$	ns		0.3	0.5
Applicable to Monitor PD: $T_c = -40 \text{ to } +85^\circ\text{C}$ unless otherwise specified					
I_m	Monitor Current, $V_R = 5 \text{ V}$, $P_f = 1.0 \text{ mW}$	μA	100	700	1200
I_D	Dark Current	$V_R = 5 \text{ V}$, $T_c = 25^\circ\text{C}$		0.1	50
		$V_R = 5 \text{ V}$		10	500
C_t	Terminal Capacitance, $V_R = 5 \text{ V}$, $f = 1 \text{ MHz}$	pF			20
LINm	Linearity, $V_R = 5 \text{ V}$, $P_f = 0.1 \text{ to } 1.0 \text{ mW}$ (Refer to Definitions)	%			± 10
γ	Tracking Error, $I_m = \text{const.}$ (Refer to Definitions)	dB		0.5	1.0

ABSOLUTE MAXIMUM RATINGS¹

(Tc = 25°C, unless otherwise specified)


SYMBOLS	PARAMETERS	UNITS	RATINGS
Pf	Optical Output Power from Fiber	mW	3.0
If	Forward Current of LD	mA	150
VR	Reverse Voltage of LD	V	2.0
If	Forward Current of PD	mA	10
VR	Reverse Voltage of PD	V	20
Tc	Operating Case Temperature	°C	-40 to +85
TSTG	Storage Temperature	°C	-40 to +85
TSLD	Lead Soldering Temperature (10 s)	°C	260
RH	Relative Humidity (noncondensing)	%	85

Note:


1. Operation in excess of any one of these parameters may result in permanent damage.

PARAMETER DEFINITIONS


Kink : kink

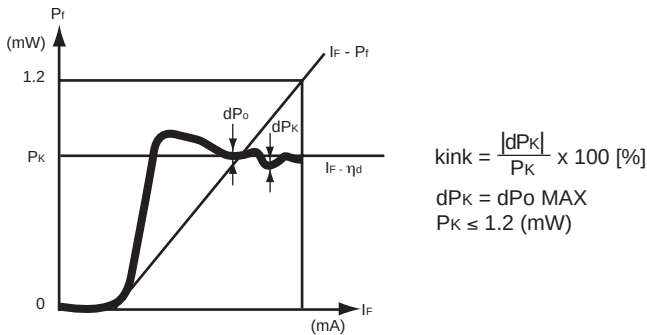

Linearity : LINm

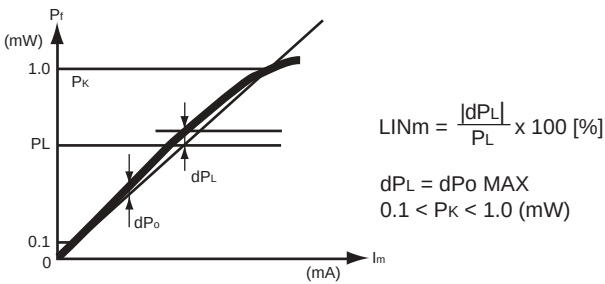


Tracking Error : γ

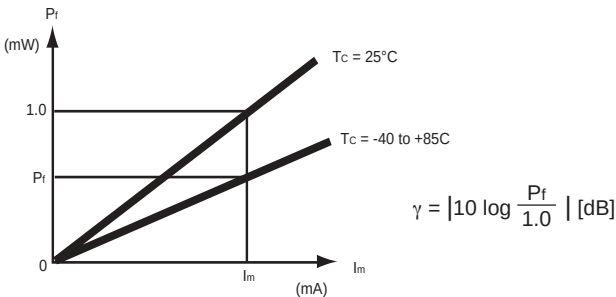


TYPICAL PERFORMANCE CURVES (T_c = -40 to +85°C, unless otherwise specified)


OPTICAL OUTPUT POWER FROM FIBER
vs. FORWARD CURRENT

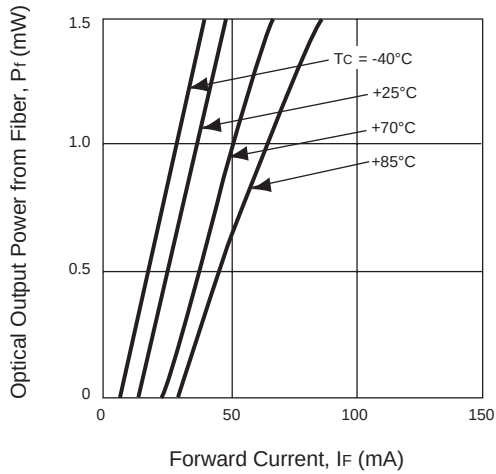


OPERATING CURRENT AND
THRESHOLD CURRENT
vs. CASE TEMPERATURE

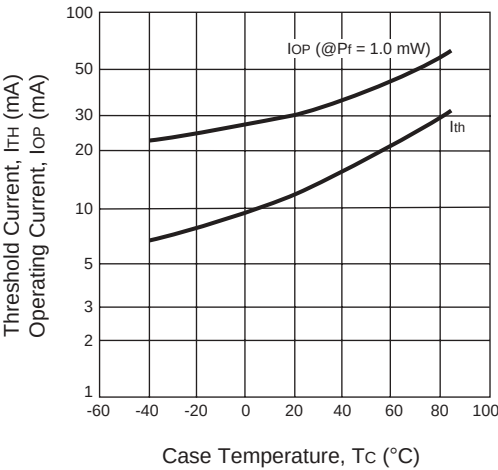


TEMPERATURE DEPENDENCE OF
CENTER WAVELENGTH

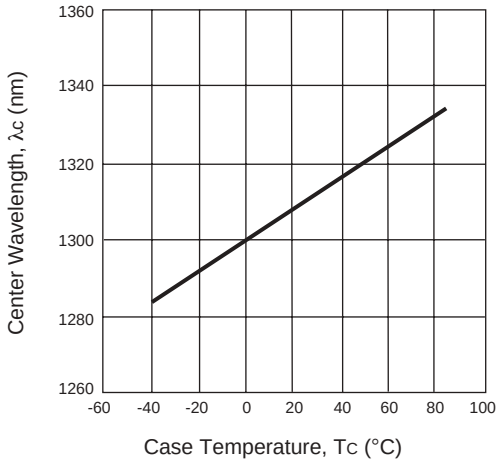


TEMPERATURE DEPENDENCE OF
DIFFERENTIAL EFFICIENCY

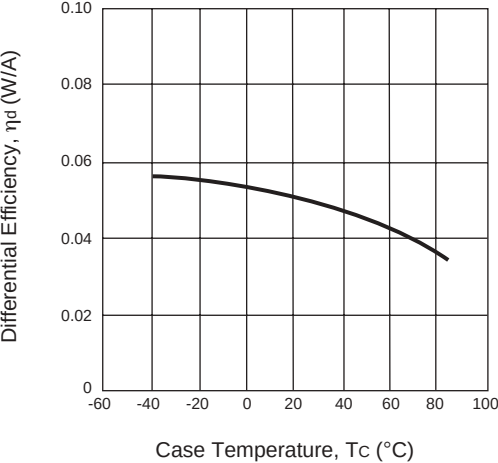

LONGITUDINAL MODE

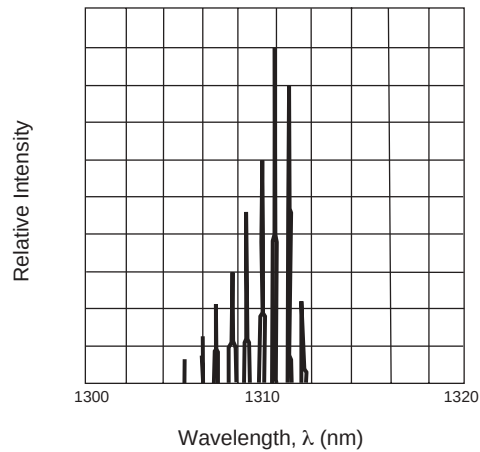


OPTICAL OUTPUT POWER FROM FIBER
vs. MONITOR CURRENT

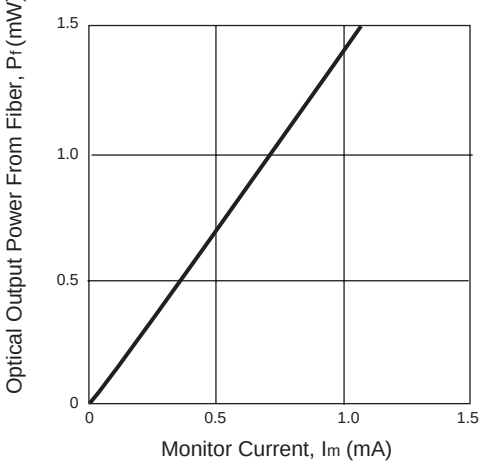

TYPICAL PERFORMANCE CURVES

(Tc = -40 to +85°C, unless otherwise specified)

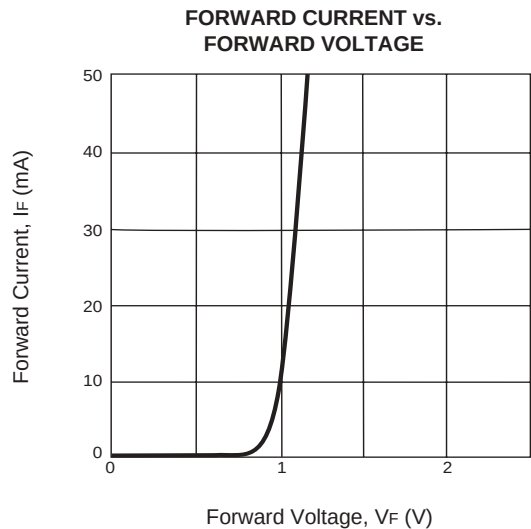


ORDERING INFORMATION

PART NUMBER	AVAILABLE CONNECTOR	FLANGE TYPE
NX7303BA-CC	With SC-UPC Connector	Flat Mount Flange
NX7303CA-CC	With SC-UPC Connector	Vertical Mount Flange


OPTICAL FIBER CHARACTERISTICS

PARAMETER	UNITS	SPECIFICATION
Mode Field Diameter	μm	9.5±1
Cladding Diameter	μm	125±2
Maximum Cladding Noncircularity	%	2
Maximum Core/Cladding Concentricity	%	1.6
Outer Diameter	mm	0.9±0.1
Cut-off Wavelength	nm	1100 to 1270
Minimum Fiber Bending Radius	mm	30
Fiber Length	mm	500±50
Flammability		UL 1581 VW-1

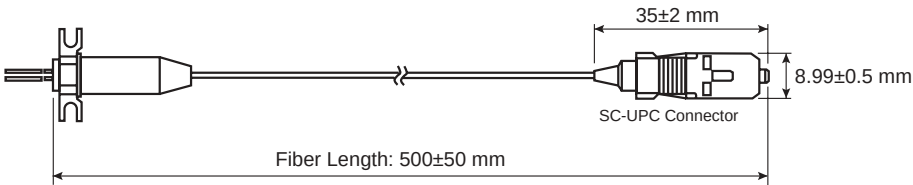


OUTLINE DIMENSIONS (Units in mm)


NX7303BA-CC

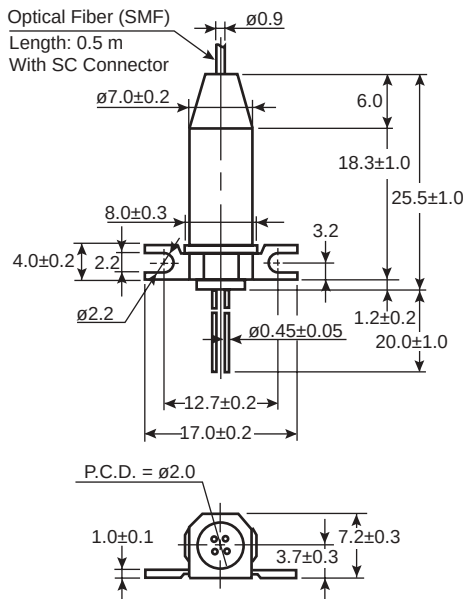

PIN CONNECTIONS



NX7303CA-CC

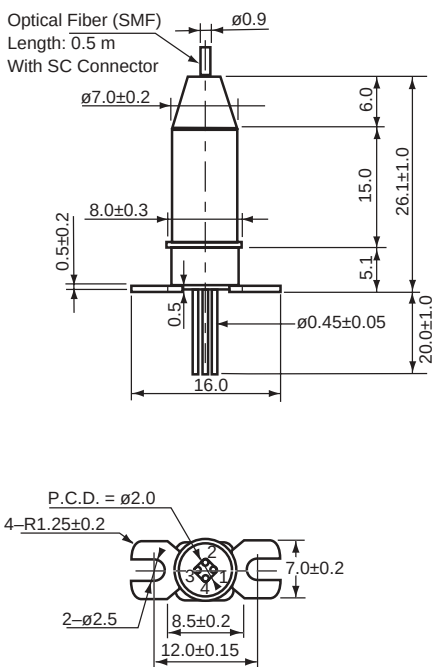

PIN CONNECTIONS

