



2.5x2.0mm Auto Grade Oscillator

O2HA

(Former FA200 Series)

DATASHEET

- AEC Q200 Qualified
- IATF-16949 QMS
- Stabilities to ± 25 PPM
- Temperature Ranges as wide as -40°C to $+125^{\circ}\text{C}$
- Supply Voltages: 1.8V; 2.5V; 3.3V; 1.7V~3.63V

1.8V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_o)	1.250 ~ 60.000 MHz
Storage Temperature Range (T_{STG})	$-55 \sim +150^{\circ}\text{C}$
Supply Voltage (V_{DD})	$1.8\text{V} \pm 5\%$
Input Current (I_{DD})	
1.250 ~ <10.000 MHz	3 mA
10.000 ~ <32.000 MHz	5 mA
32.000 ~ 60.000 MHz	10 mA
Standby Current	
$T_{OPR} = -40 \sim +85^{\circ}\text{C}$	10 μA
$T_{OPR} = -40 \sim +105^{\circ}\text{C} / -40 \sim +125^{\circ}\text{C}$	20 μA
Output Symmetry (50% V_{DD})	45% ~ 55%
Rise Time (10%~90% V_{DD})	5 nS
Fall Time (90%~10% V_{DD})	5 nS
Output Voltage (V_{OL})	10% V_{DD}
(V_{OH})	90% V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_s)	10 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	10 mS
Aging (per year @ 25C)	± 5 PPM

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 1.8V²

Frequency Stability	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}^2$	$-40 \sim +85$	1.250 ~ 60.000
$\pm 100\text{PPM}^2$	$-40 \sim +105$	1.250 ~ 60.000
$\pm 100\text{PPM}^2$	$-40 \sim +125$	1.250 ~ 60.000
$\pm 50\text{PPM}^2$	$-40 \sim +85$	1.250 ~ 60.000
$\pm 50\text{PPM}^2$	$-40 \sim +105$	1.250 ~ 60.000
$\pm 50\text{PPM}^3$	$-40 \sim +125$	1.250 ~ 60.000
$\pm 25\text{PPM}^3$	$-40 \sim +85$	1.250 ~ 60.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance and operating temperature range.

7/29/2020 Updated termination finish and MSL info.

© Copyright 2020 Fox Electronics. All rights reserved

Title / Description: O2HA SERIES STANDARD SPECIFICATIONS

Drawing Number: O2HA-DOC-1

Revision: C

Part Number:

Cage: 61429

Draftsperson: BEC

Approved: MAJ

Revision Date: 07/29/2020



2.5x2.0mm Auto Grade Oscillator

O2HA

(Former FA200 Series)

DATASHEET

2.5V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_o)	1.250 ~ 60.000 MHz
Storage Temperature Range (T_{STG})	-55 ~ +150°C
Supply Voltage (V_{DD})	2.5V±5%
Input Current (I_{DD})	
1.250 ~ <10.000 MHz	6 mA
10.000 ~ <32.000 MHz	8 mA
32.000 ~ 60.000 MHz	20 mA
Standby Current	
$T_{OPR} = -40 \sim +85^\circ\text{C}$	10 μA
$T_{OPR} = -40 \sim +105^\circ\text{C} / -40 \sim +125^\circ\text{C}$	20 μA
Output Symmetry (50% V_{DD})	45% ~ 55%
Rise Time (10%~90% V_{DD})	5 nS
Fall Time (90%~10% V_{DD})	5 nS
Output Voltage (V_{OL})	10% V_{DD}
(V_{OH})	90% V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_s)	10 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	10 mS
Aging (per year @ 25C)	±5 PPM

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 2.5V²

Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-40 ~ +85	1.250 ~ 60.000
±100PPM	-40 ~ +105	1.250 ~ 60.000
±100PPM	-40 ~ +125	1.250 ~ 60.000
±50PPM	-40 ~ +85	1.250 ~ 60.000
±50PPM	-40 ~ +105	1.250 ~ 60.000
±50PPM	-40 ~ +125	1.250 ~ 60.000
±25PPM	-40 ~ +85	1.250 ~ 60.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance and operating temperature range.



2.5x2.0mm Auto Grade Oscillator

O2HA

(Former FA200 Series)

DATASHEET

3.3V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_o)	1.250 ~ 160.000 MHz
Storage Temperature Range (T_{STG})	-55 ~ +150°C
Supply Voltage (V_{DD})	3.3V±10%
Input Current (I_{DD})	
1.25 ~ <20.000 MHz	7 mA
20.000 ~ <32.000 MHz	12 mA
32.000 ~ 50.000 MHz	20 mA
>50.000 ~ 60.000 MHz	25 mA
>60.000 ~ 160.000 MHz	35 mA
Standby Current	
$T_{OPR} = -40 \sim +85^\circ\text{C}$	10 μA
$T_{OPR} = -40 \sim +105^\circ\text{C} / -40 \sim +125^\circ\text{C}$	
1.25 ~ <135.000 MHz	20 μA
135.000 ~ 160.000 MHz	100 μA
Output Symmetry (50% V_{DD})	45% ~ 55%
Rise Time (10%~90% V_{DD})	
1.250 ~ <20.000 MHz	6 nS
20.000 ~ 160.000 MHz	5 nS
Fall Time (90%~10% V_{DD})	
1.250 ~ <20.000 MHz	6 nS
20.000 ~ 160.000 MHz	5 nS
Output Voltage (V_{OL})	10% V_{DD}
(V_{OH})	90% V_{DD} Min
Output Current (I_{OL})	2 mA Min
(I_{OH})	-2 mA Min
Output Load (HCMOS)	15 pF
Start-up Time (T_s)	10 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	10 mS
Aging (per year @ 25C)	±5 PPM

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 3.3V²

Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-40 ~ +85	1.250 ~ 160.000
±100PPM	-40 ~ +105	1.250 ~ 160.000
±100PPM	-40 ~ +125	1.250 ~ 133.333
±50PPM	-40 ~ +85	1.250 ~ 160.000
±50PPM	-40 ~ +105	1.250 ~ 160.000
±50PPM	-40 ~ +125	1.250 ~ 133.333
±25PPM	-40 ~ +85	1.250 ~ 60.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance and operating temperature range.

7/29/2020 Updated termination finish and MSL info.

© Copyright 2020 Fox Electronics. All rights reserved

Title / Description: O2HA SERIES STANDARD SPECIFICATIONS

Drawing Number: O2HA-DOC-1

Part Number:

Draftsperson: BEC

Revision: C

Cage: 61429

Revision Date: 07/29/2020



2.5x2.0mm Auto Grade Oscillator

O2HA

(Former FA200 Series)

DATASHEET

VARIABLE VOLTAGE ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_o)	1.25 ~ 135 MHz
Storage Temperature Range (T_{STG})	-55 ~ +125°C
Supply Voltage (V_{DD})	1.7V ~ 3.63V
Input Current (I_{DD})	
1.25 ~ 19.999MHz	4 mA
20.0 ~ 39.999MHz	6 mA
40.0 ~ 59.999MHz	10 mA
60.0 ~ 70MHz	15 mA
>70.0 ~ 135.0MHz	30 mA
Standby Current	
$T_{OPR} = -40 \sim +85^\circ\text{C}$	10 μA
$T_{OPR} = -40 \sim +105^\circ\text{C} / -40 \sim +125^\circ\text{C}$	20 μA
Output Symmetry (50% V_{DD})	
1.25 ~ 70MHz	45% ~ 55%
>70.0 ~ 135MHz	40% ~ 60%
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	6 nS
Output Voltage (V_{OL})	10% V_{DD}
(V_{OH})	90% V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	5 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	5 mS
Aging (per year @ 25C)	± 5 PPM

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp²

Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
$\pm 100\text{PPM}$	-40 ~ +85	1.250 ~ 135.000
$\pm 100\text{PPM}$	-40 ~ +105	1.250 ~ 135.000
$\pm 100\text{PPM}$	-40 ~ +125	1.250 ~ 135.000
$\pm 50\text{PPM}$	-40 ~ +85	1.250 ~ 135.000
$\pm 50\text{PPM}$	-40 ~ +105	1.250 ~ 135.000
$\pm 50\text{PPM}$	-40 ~ +125	1.250 ~ 135.000
$\pm 25\text{PPM}$	-40 ~ +85	1.250 ~ 135.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance and operating temperature range.

7/29/2020 Updated termination finish and MSL info.

© Copyright 2020 Fox Electronics. All rights reserved

Title / Description: O2HA SERIES STANDARD SPECIFICATIONS

Drawing Number: O2HA-DOC-1

Revision: C

Part Number:

Cage: 61429

Draftsperson: BEC

Approved: MAJ

Revision Date: 07/29/2020




2.5x2.0mm Auto Grade Oscillator

O2HA


(Former FA200 Series)

DATASHEET

DIMENSIONS / MECHANICAL SPECIFICATIONS

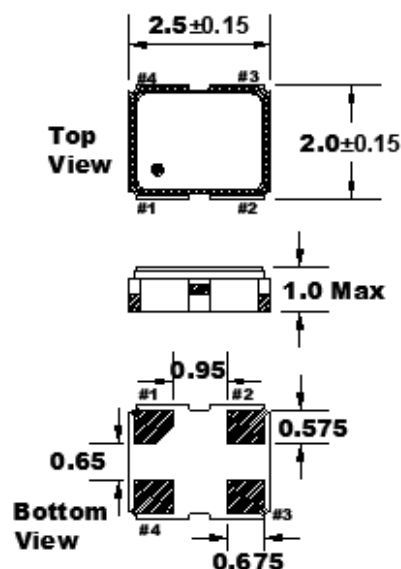

Recommended Solder Pad Layout



All dimensions are in millimeters.

Pin Connections

#1 E/D #3 Output
#2 GND #4 VDD

Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL) per J-STD-033	N/A
Termination Finish	Au (0.3~1μ) over Ni (1.27~8.89μm)
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes, no exemptions
REACH Compliant (latest version)	Yes

Notes:

*A 0.01μF capacitor should be placed between VDD (Pin 4) and GND (Pin2) to minimize power supply line noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary

7/29/2020 Updated termination finish and MSL info.

© Copyright 2020 Fox Electronics. All rights reserved

Title / Description: O2HA SERIES STANDARD SPECIFICATIONS

Drawing Number: O2HA-DOC-1

Revision: C

Part Number:

Cage: 61429

Draftsperson: BEC

Approved: MAJ

Revision Date: 07/29/2020




2.5x2.0mm Auto Grade Oscillator

O2HA

(Former FA200 Series)

DATASHEET

Tape Specifications (millimeters)							Reel Specifications (millimeters)						
A	B	C	D	E	F	Reel Qty	G	H	I	J	K	L	M
Ø1.5	4.0	4.0	3.5	8.0	1.15	-T3 = 3,000 -T2 = 2,000 -T1 = 1,000	2.0	Ø13	Ø21	Ø60	Ø180	9.0	2.0

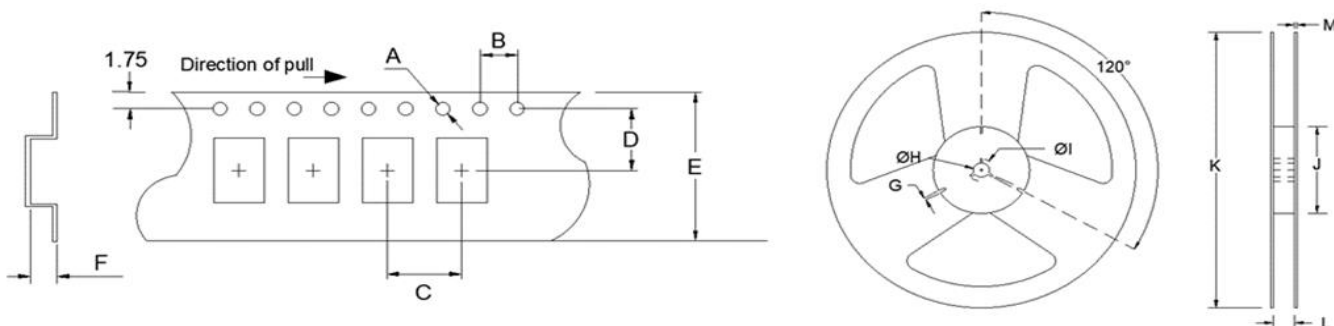

Available Options & Part Identification*

Example: **F O2HA C B P 25.0**

F	O2HA	C	B	P	25.0
Fox	Model Number	Voltage	Stability*	Operating Temperature	Frequency (MHz)
		K = 1.8V±5% H = 2.5V±5% C = 3.3V±10% V = 1.7V~3.63V	A = ±100PPM B = ±50PPM D = ±25PPM	M = -40 to +85°C P = -40 to +105°C I = -40 to +125°C	

*Not all frequencies in the frequency range, nor every combination of stability, temp range, and voltage available.

See stabilities and op temps for each V_{DD}.



Corporate Headquarters

5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales

1-888-GET-2-FOX (1-888-438-2369)
or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support

<http://www.FOXONLINE.com/email>

Product use: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

7/29/2020 Updated termination finish and MSL info.

© Copyright 2020 Fox Electronics. All rights reserved

Title / Description: O2HA SERIES STANDARD SPECIFICATIONS

Drawing Number: O2HA-DOC-1

Part Number:

Draftsperson: BEC

Revision: C

Cage: 61429

Approved: MAJ

Revision Date: 07/29/2020