



HCSL 7x5mm SMD Oscillator

O7SL

(former F730SL, F740SL Series)

DATASHEET

- HCSL Differential Output
- Stabilities to ± 25 PPM
- Temperature Ranges as wide as -40°C to $+85^{\circ}\text{C}$
- Supply Voltages: 2.5V, 3.3V

2.5V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_o)	15.000 ~ 160.000 MHz
Storage Temperature Range (T_{STG})	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	$2.5 \pm 5\%$
Input Current (I_{DD})	40 mA
Standby Current	10 μA
Output Symmetry (50% V_{DD})	45 % ~ 55 %
Rise/Fall Time (20~80% V_{OPP}) (T_R/T_F)	
15.000 ~ 99.999999 MHz	1.0 nS
>100.000 ~ 160.000 MHz	0.7 nS
Output Voltage (V_{OL})	$-0.15 \sim 0.15\text{V}$
(V_{OH})	$0.58 \sim 0.85\text{V}$
Output Swing (V_{OPP})	0.6V Min
Output Termination	50 Ohms to GND
Start-up Time (T_S)	10 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	10 mS
Aging (per year @ 25°C)	± 3 PPM
Phase Jitter (12kHz ~ 20MHz)	1pS RMS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 2.5V²

Frequency Stability ²	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}$	$0 \sim +70$	15.000 ~ 160.000
$\pm 100\text{PPM}$	$-40 \sim +85$	15.000 ~ 160.000
$\pm 50\text{PPM}$	$0 \sim +70$	15.000 ~ 160.000
$\pm 50\text{PPM}$	$-40 \sim +85$	15.000 ~ 160.000
$\pm 25\text{PPM}$	$0 \sim +70$	15.000 ~ 160.000
$\pm 25\text{PPM}$	$-40 \sim +85$	15.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, vibration, reflow, and one-year aging.





HCSL 7x5mm SMD Oscillator

O7SL

(former F730SL, F740SL Series)

DATASHEET

3.3V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_O)	15.000 ~ 160.000 MHz
Storage Temperature Range (T_{STG})	-55 ~ +125°C
Supply Voltage (V_{DD})	3.3V±10%
Input Current (I_{DD})	40 mA
Standby Current	10 µA
Output Symmetry (50% V_{DD})	45% ~ 55%
Rise/Fall Time (20~80% V_{OPP}) (T_R/T_F)	1.0 nS
15.000 ~ 99.999999 MHz	0.7 nS
>100.000 ~ 160.000 MHz	
Output Voltage (V_{OL})	-0.15 ~ 0.15V
(V_{OH})	0.66 ~ 0.85V
Output Swing (V_{OPP})	0.65V Min
Output Termination	50 Ohms to GND
Start-up Time (T_S)	10 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	10 mS
Aging (per year @25°C)	±3 PPM
Phase Jitter (12kHz ~ 20MHz)	1 pS RMS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 3.3V²

Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	0 ~ +70	15.000 ~ 160.000
±100PPM	-40 ~ +85	15.000 ~ 160.000
±50PPM	0 ~ +70	15.000 ~ 160.000
±50PPM	-40 ~ +85	15.000 ~ 160.000
±25PPM	-0 ~ +70	15.000 ~ 160.000
±25PPM	-40 ~ +85	15.000 ~ 160.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, vibration, reflow, and one-year aging.







HCSL 7x5mm SMD Oscillator

O7SL
(former F730SL, F740SL Series)
DATASHEET

DIMENSIONS / MECHANICAL SPECIFICATIONS

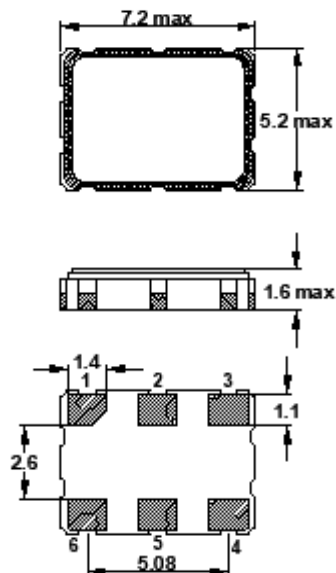

Recommended Solder Pad Layout



Pin Connections

#1 E/D	#4 Output_1
#2 N.C.	#5 Output_2
#3 GND	#6 V _{DD}

All dimensions are in millimeters.

Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes

Notes:

*A 0.01μF capacitor should be placed between V_{DD} (Pin 4) and GND (Pin2) to minimize power supply line noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary



© Copyright 2019 Fox Electronics. All rights reserved

Title / Description: O7SL SERIES STANDARD SPECIFICATIONS

Drawing Number: O7SL-DOC-1

Size: A

Part Number:

Cage: 61429

Draftsperson: DG

Approved: BEC

Revision Date: 5/3/2019




HCSL 7x5mm SMD Oscillator

O7SL

(former F730SL, F740SL Series)

DATASHEET

Tape Specifications (millimeters)							Reel Specifications (millimeters)						
A	B	C	D	E	F	Std Reel Qty	G	H	I	J	K	L	M
Ø1.55	4.0	8.0	7.5	16.0	2.0	-T1 = 1,000 -T2 = 2,000	2.5	Ø13.2	Ø21	Ø60.5	Ø180	17.0	1.5

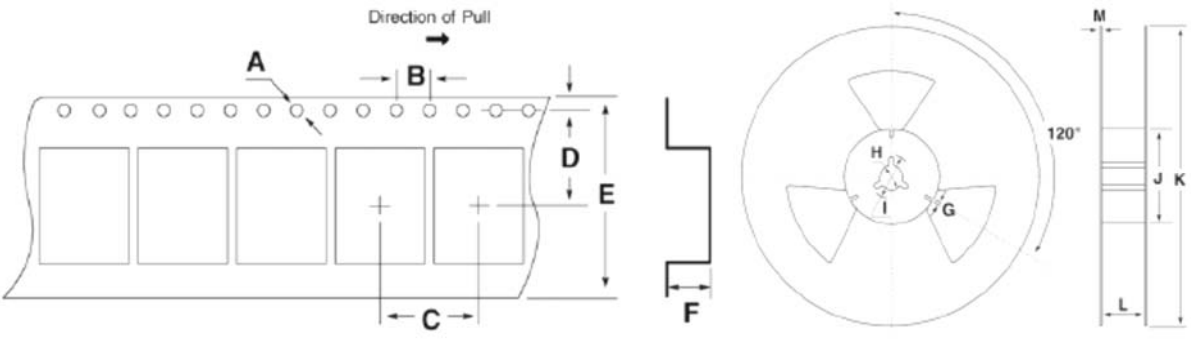

Available Options & Part Identification*

Example: **F O7SL C B M 25.0**

F	O7SL	C	B	M	25.0
Fox	Model Number	Voltage H = 2.5V±5% C = 3.3V±10%	Stability A = 100 PPM B = 50 PPM D = 25 PPM	Operating Temperature C = 0 to +70°C M = -40 to +85°C	Frequency(MHz)

*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V_{DD}.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369)
or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

Product use: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third-party owners.



© Copyright 2019 Fox Electronics. All rights reserved

Title / Description: O7SL SERIES STANDARD SPECIFICATIONS

Drawing Number: O7SL-DOC-1

Size: A

Part Number:

Cage: 61429

Draftsperson: DG

Approved: BEC

Revision Date: 5/3/2019