


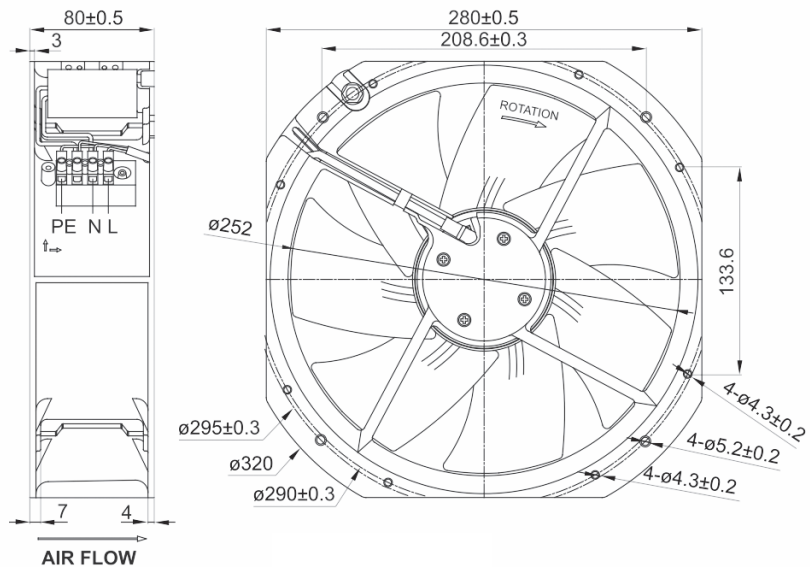

Frame	Diecast Aluminum	<u>Operating Temperature</u> Ball Bearing -40C ~ +80C Storage Temp -40C ~ +80C <u>Life Expectancy</u> Ball Bearing 40,000 hours (L10 at 40C) Environmental: IP55 Rated Weight: ~ 6.2 lbs.
Impeller	Metal	
Connection	Terminal Block, 18AWG	
Motor	Capacitor drive, thermally protected	
Bearing System	Dual ball	
Insulation	Class F	
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	

Airflow (CFM)	Static Pressure (\"H2O)
0	0.80
300	0.55
600	0.40
900	0.25
1100	0.00

Part Number	OA280AN-11-1TB18	OA280AN-22-1TB18
Nominal Voltage	115VAC	230VAC
Voltage Range	100 ~ 125VAC	200 ~ 240VAC
Rated Power	148 W	158 W
Nominal Current	1.5 A	0.82 A
Rated Speed (RPM)	2700	2700
Airflow (CFM)	1130	1130
Noise Level (dB)	70	70
Max. Static Pressure	0.78" H ₂ O	0.78" H ₂ O