



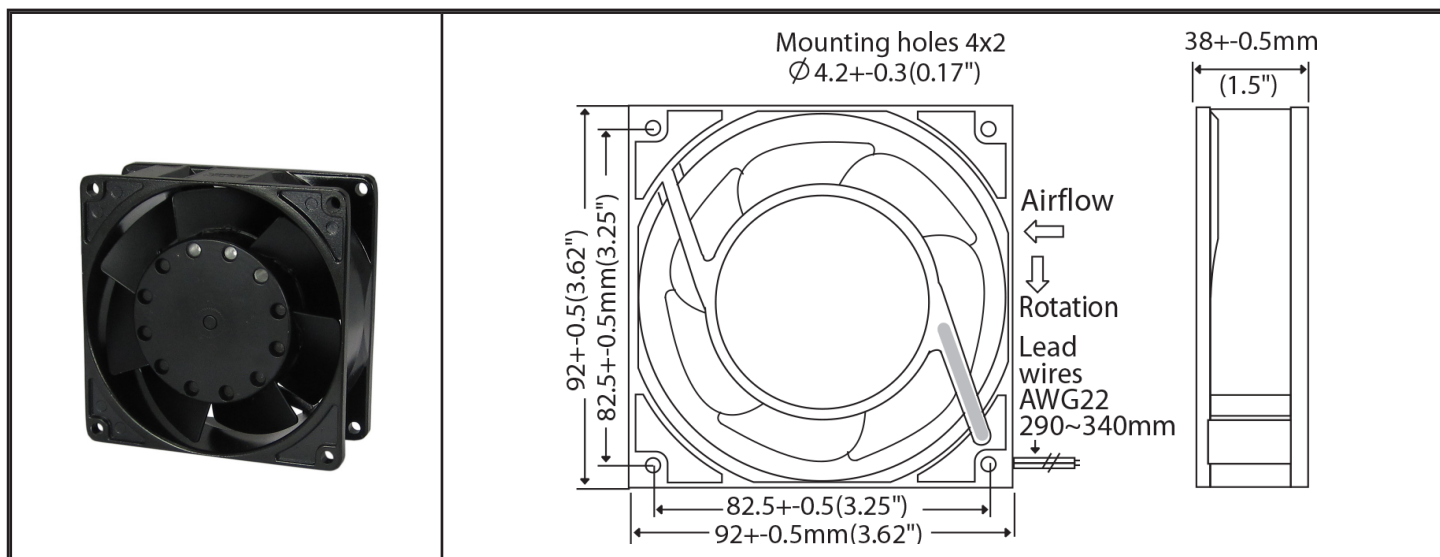

Frame	Aluminum Die-cast	Notes
Impeller	Metal alloy	Date: 050113
Connection *	Lead wires or Terminal	Environmental Protection: IP55
Motor	AC Shaded pole, Impedance protected	Storage Temp: -40C ~ +100C
Bearing System	Dual Ball bearing	Weight: 480g (1.05 lbs)
Insulation Resistance	>100MOhm at 500VDC	Available AC voltages by special order: 12, 24, 28, 38, 42, 48, 440, 480. Dual speed also available. Call for information.
Dielectric Strength	> 60 seconds at 1500VAC	
Operating Temp Range	-30C ~ +80C (non-condensing)	
Life Expectancy	50000 hours (55C)	* Specify configuration: TB = Terminal, Ball bearing WB = Wire leads, Ball bearing

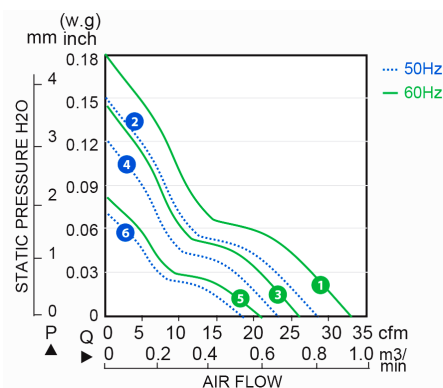

Model No.	Speed (RPM)	Airflow (CFM)	Noise	Volts AC	Voltage Range AC	Watts	Max. Static Pressure ("H ₂ O)	Curves
OA938AP-11-1 * 1855	2700 3150	45 55	40	115	100 ~ 120	17 15	0.17 0.22	2 (50Hz) 1 (60Hz)
OA938AP-11-2 * 1855	2350 2600	36 42	33	115	100 ~ 120	13 11	0.14 0.16	4 (50Hz) 3 (60Hz)
OA938AP-11-3 * 1855	1950 1850	29 27	23	115	100 ~ 120	9 7	0.12 0.11	6 (50Hz) 5 (60Hz)
OA938AP-22-1 * 1855	2700 3150	45 55	40	230	200 ~ 240	17 15	0.17 0.22	2 (50Hz) 1 (60Hz)
OA938AP-22-2 * 1855	2350 2600	36 42	33	230	200 ~ 240	13 11	0.14 0.16	4 (50Hz) 3 (60Hz)
OA938AP-22-3 * 1855	1950 1850	29 27	23	230	200 ~ 240	9 7	0.12 0.11	6 (50Hz) 5 (60Hz)