
OD6038 'VA' Series

DC Vanaxial Fan
60x38mm (2.36"x 1.5")



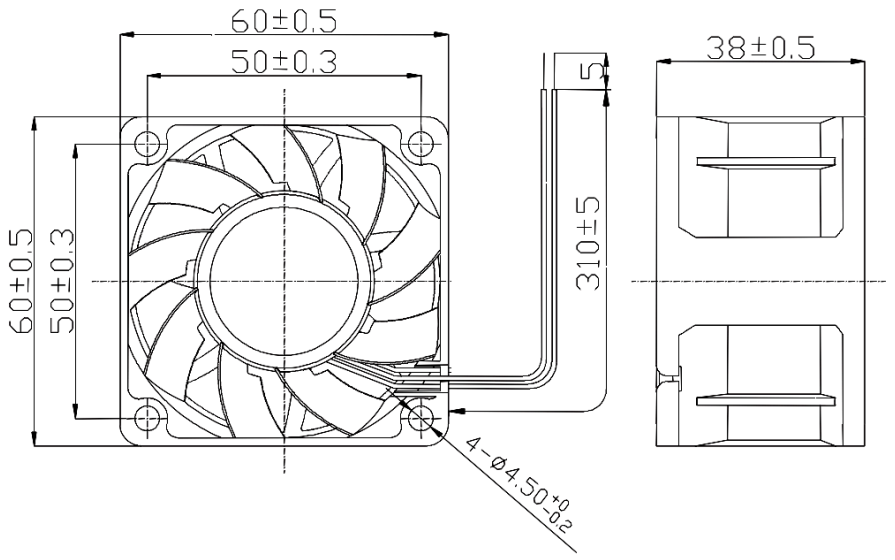

Frame & Impeller	PBT, UL94V-O plastic
Connection	2x Lead wires, Red(+), Black (-)
Motor	Brushless DC, auto restart, polarity protected.
Bearing System	Dual ball bearing
Insulation Resistance	Min. 10M at 500VDC
Dielectric Strength	1 minute at 500VAC / 1 second, max leakage 500 microamp
Temperature Range	-10C ~ +70C
Storage Temperature	-40C ~ +80C
Life (L10)	50,000 hours (40C)


Available Options

Tachometer (FG)

Locked Rotor Alarm (RD)

Thermal Control

Other speeds and voltages available by special order

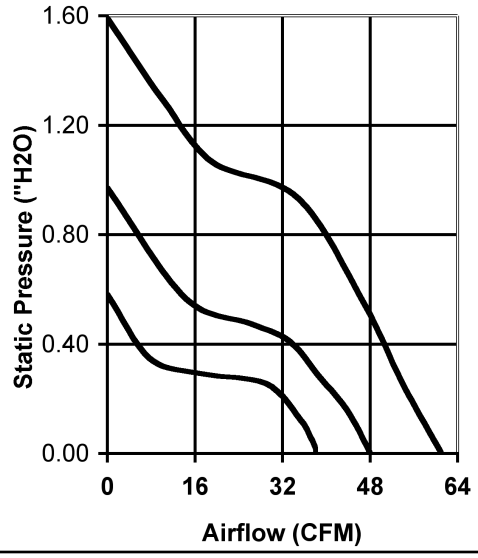

Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts DC	Power (Watts)	Amps	Max. Static Pressure (iH_2O)
OD6038-12HB-VXC	10000	61	64	12	17	1.42	1.59
OD6038-12MB-VXC	8000	48	58	12	8	0.64	0.97
OD6038-12LB-VXC	6000	38	50	12	3	0.28	0.58
OD6038-24HB-VXC	10000	61	64	24	21	0.88	1.59
OD6038-24MB-VXC	8000	48	58	24	10	0.43	0.97
OD6038-24LB-VXC	6000	38	50	24	4	0.20	0.58

Knight Electronics, Inc.
10557 Metric Drive
Dallas, Texas 75243
214-340-0265

092110

RoHS Compliant

Orion Fans

Information and data is subject to change without prior notification.

m1