
ASTRODYNE

40-60W Ultraminiature Open Frame Switching Power Supplies

OFM40/60 series

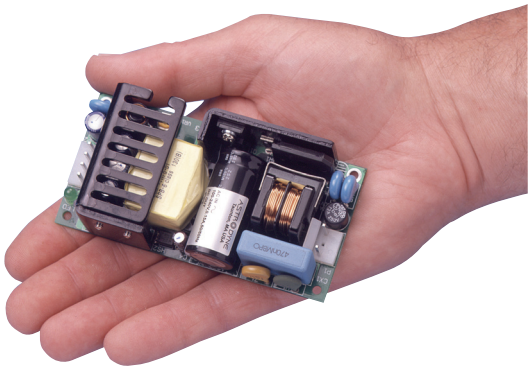

2"W x 4"L x 1.2"H

- 40W to 60W Output Power
- Universal 90-264VAC Input
- Single, Dual & Triple Outputs from 3.3 to 48VDC
- High Efficiency to 88%
- 3000V Isolation
- 1U Compatible Height


Model Number	Output Voltage	Output Amps	Efficiency %
40W SINGLE OUTPUT			
OFM40-033	3.3VDC	6	74
OFM40-050	5VDC	6	78
OFM40-090	9VDC	4.45	82
OFM40-120	12VDC	3.34	84
OFM40-150	15VDC	2.67	85
OFM40-240	24VDC	1.67	86
OFM40-300	30VDC	1.33	86
OFM40-360	36VDC	1.11	87
OFM40-480	48VDC	0.83	88
40W DUAL OUTPUT	**V1/V2**	**I1/I2 (Min.-Max.)**	
OFM40D-01	5 / 12VDC	0.4 - 3.2 / 0.2 - 2A	77
OFM40D-02	5 / 24VDC	0.4 - 3.2 / 0.2 - 1.2A	78
40W TRIPLE OUTPUT	**V1/V2/V3**	**I1/I2/I3 (Min.-Max.)**	
OFM40T-01	5/12/-5VDC	0.4 - 3/0.2 - 2/0 - 0.3A	75
OFM40T-02	5/12/-12VDC	0.4 - 3/0.2 - 2/0 - 0.3A	75
OFM40T-03	5/15/-15VDC	0.4 - 3/0.2 - 1.6/0 - 0.3A	75
OFM40T-04	5/24/-12VDC	0.4 - 3/0.2 - 1/0 - 0.3A	75
OFM40T-05	5/25/-5VDC	0.4 - 3/0.2 - 1/0 - 0.3A	75
OFM40T-06	5/24/12VDC	0.4 - 3/0.2 - 1/0 - 0.3A	75
OFM40T-07	3.3/5/-12VDC	0.4 - 5/0.2 - 2/0 - 0.3A	68

300 Myles Standish Blvd., Taunton, MA 02780
Ph: 1-800-823-8082 Fax: 508-823-8181

ASTRODYNE

40-60W Ultraminiature Open Frame Switching Power Supplies

OFM40/60 series

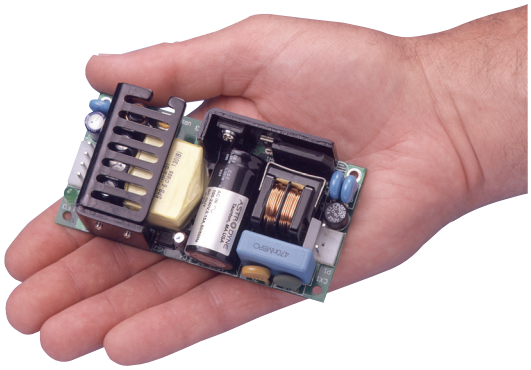

2"W x 4"L x 1.2"H

- 40W to 60W Output Power
- Universal 90-264VAC Input
- Single Outputs from 3.3 to 48VDC
- High Efficiency to 88%
- 3000V Isolation
- 1U Compatible Height

Model Number	Output Voltage	Output Amps	Efficiency %
60 WATT			
OFM60-033	3.3VDC	8	74
OFM60-050	5VDC	8	78
OFM60-090	9VDC	6.67	82
OFM60-120	12VDC	5	84
OFM60-150	15VDC	4	85
OFM60-240	24VDC	2.5	86
OFM60-300	30VDC	2	86
OFM60-360	36VDC	1.67	87
OFM60-480	48VDC	1.25	88

300 Myles Standish Blvd., Taunton, MA 02780
Ph: 1-800-823-8082 Fax: 508-823-8181

ASTRODYNE

40-60W Ultraminiature Open Frame Switching Power Supplies **OFM40/60 series**

INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC	
Frequency Range	47-63 Hz	
Inrush Current, typ:	30A @ 100VAC Input *	
	50A @ 200VAC Input *	

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Chart	
Load Regulation	(10-100% FL)	
	Single Outputs	+/-1%
	Dual/Triple Output	+/-3%
Line Regulation	Singles +/- 0.5 max	
Preset Accuracy	1%	
DC Voltage Adjust (typ)	+/- 6% of FS (Primary)	
Temperature Coefficient	+/-0.05%/°C	
Ripple/Noise, 20Mhz BW	50mV Pk-Pk, typ	
Over Voltage Protection	Clamp, 130-150% *	
Short Circuit Protection	Continuous, self-recovering	
Hold Up Time	8 mS, typ	

GENERAL SPECIFICATIONS

Input-Out Isolation	I/P-O/P:3000VAC
Efficiency	74%~88%, typ
Switching Frequency	100Khz, (fixed, typical)
Safety	UL, TUV

PHYSICAL SPECIFICATIONS

Size	2" x 4" x 1.2"
	50.8 x 101.6 x 30.48mmConstruction
	Open Frame
Weight	7oz (198g)

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +50°C(FL)
Storage Temperature	-40 to +85°C *
Relative Humidity	0 to + 95%, non-cond *
EMC	CISPR/FCC Class B
MTBF	300,000 Hrs
	Mil Std 217, 25C

All specifications are typical at nominal input, full load, and 25°C unless otherwise noted


* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranteed nor implied.

Astrodyne products are not authorized or warranteed for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.

WWW.ASTRODYNE.COM

300 Myles Standish Blvd., Taunton, MA 02780
Ph: 1-800-823-8082 Fax: 508-823-8181

MECHANICAL DIMENSIONS

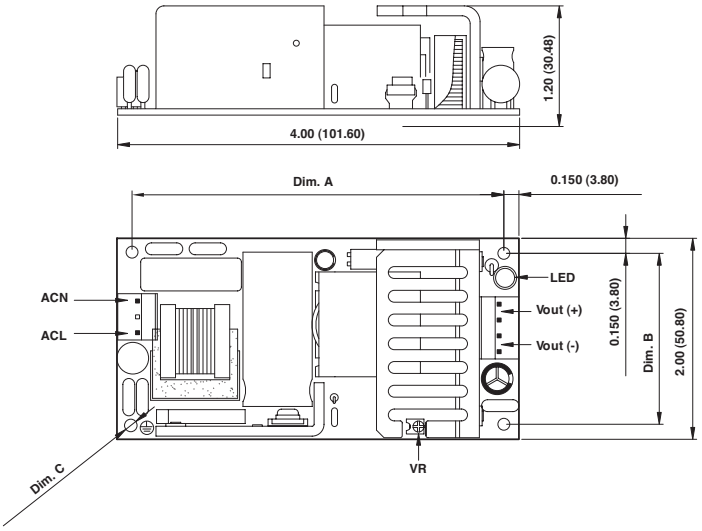


Note: Single/Dual Dimensional Differences

Dimensions	Singles	Dual/Triples
A	3.70 (94.00)	3.75 (95.3)
B	1.70 (43.2)	1.75 (44.5)
C	0.125 (3.17)	0.12 (3.0)

Single Output



Dual/Triple Output



Connector Mate Type

Single Output Versions:

Input: Molex 09-50-3031


Output: Molex 09-50-3041

Dual/Triple Output Versions:

Input: Molex 09-50-3031

Output: Molex 09-50-3061

OUTPUT DERATING CURVE

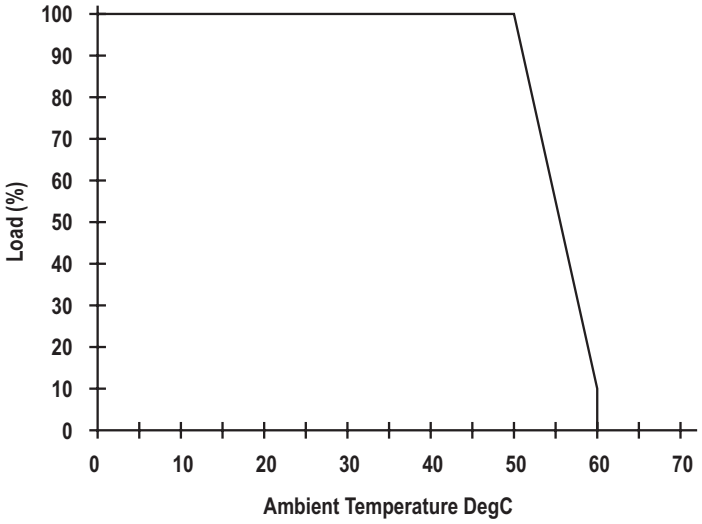

300 Myles Standish Blvd., Taunton, MA 02780
Ph: 1-800-823-8082 Fax: 508-823-8181