OPS875

Intel® Core™ i7/i5/i3 Open Pluggable Specification (OPS) Digital Signage Player

NEW



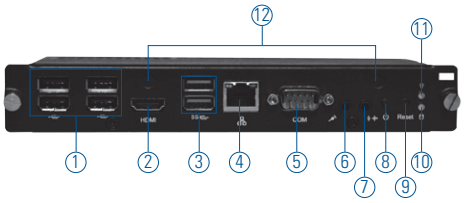

1. USB 2.0 x 4
2. HDMI
3. USB 3.0 x 2
4. Ethernet
5. RS-232
6. Audio (Mic-in)
7. Audio (Line-out)
8. Power Switch
9. Reset Button
10. HDD Indicator
11. Power Indicator
12. Wi-Fi Antenna (optional)
13. JAE TX-25

Intel OPS | DDR3 | USB 3.0

Features

- Open Pluggable Specification (OPS) compliance
- Supports socket G2 (rPGA988B) 3rd generation Intel® Core™ i7/i5/i3 processor
- Intel® HM76
- DDR3-1600 SO-DIMM max. up to 8 GB
- USB 3.0, PCI Express Mini Card
- Easy maintenance: pluggable HDD and easy-to-change DRAM
- HDMI interface for 2nd display



▲ Rear view

Specifications

Main System	CPU	Supports socket G2 (rPGA988B) for 3rd generation Intel® Core™ i7/i5/i3 processor
	Chipset	Intel® HM76
	System Memory	1 x 204-pin DDR3-1600 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray
	BIOS	AMI UEFI BIOS
	Watchdog Timer	255 levels, 1 ~ 255 sec.
I/O	2 x USB 3.0 4 x USB 2.0 1 x 10/100/1000Mbps Ethernet 1 x Power on/off button 1 x Reset button 1 x HDMI 1 x RS-232 1 x Audio (Line-out/Mic-in) 1 x DisplayPort (via OPS JAE interconnector) (Pure DP) 2 x USB 2.0 (via OPS JAE interconnector) 1 x USB 3.0 (via OPS JAE interconnector) 1 x HDMI/DVI (via OPS JAE interconnector) 1 x Audio (Line-out, via OPS JAE interconnector) 1 x UART (TX/RX, via OPS JAE interconnector)	
Indicator	1 x LED for system power ON 1 x LED for HDD active	
WiFi	Supports 802.11 b/g/n (optional)	
Expansion Slot	1 x PCI Express Mini Card or mSATA	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") (D) x 30 mm (1.18") (H)	
Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") (D) x 70 mm (2.76") (H)	
Weight (net/gross)	1 kg (2.2 lb)/1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (32°F ~ 113°F) (With airow 0.5m/s)	

Optional OS Installation

Windows® 7, Windows® 8

Ordering Information

Standard	
OPS875	OPS digital signage player supports socket G2 3rd generation Intel® Core™ processor
Optional	
AX93169	OPS docking board

* Specifications and certifications are based on options and may vary.

Dimensions

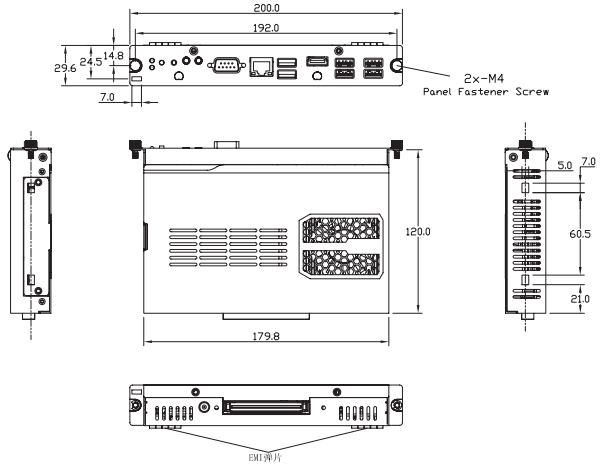

© 2016 Axiomtek Co., Ltd. All rights reserved.