OV9762 HD product brief



Best-In-Class 720p High Definition Video For Front-Facing Cameras in Smartphones and Tablets

lead free

available in a lead-free package

The OV9762 is a high performance CameraChip™ sensor designed specifically for front-facing camera applications in smartphones and tablets. The OV9762 leverages OmniVision's first 1.87-micron OmniBSI-2™ pixel to deliver improved performance and best-in-class 720p high definition (HD) video at 30 frames per second (fps).

The sensor's slightly larger 1.87-micron pixel enables enhanced image and video quality in a compact package that is pin-to-pin compatible with the previous-generation OV9760 CameraChip sensor.

The OV9762 can record 1.3-megapixel (1376 x 960 pixels) video at 30 fps, or best-in-class 720p HD video at 30 fps with electronic image stabilization (EIS). When binned to VGA resolution (640 x 480 pixels) video, the sensor delivers twice the sensitivity compared to full resolution, ensuring high quality video capture in difficult low-light conditions.

The OV9762 fits into a 4.3 x 4.1 mm package.

Find out more at www.ovt.com.

OmniVision

OV9762



Applications

- Cellular Phones
- Digital Still Cameras (DSC)
- Digital Video Camcorders (DVC)
- PC Multimedia

Product Features

- automatic black level calibration (ABLC)
- programmable controls for frame rate, mirror and flip, cropping and windowing
- image quality controls: defective pixel canceling
- supports output formats: 10-bit RAW RGB MIPI
- supports horizontal and vertical subsampling
- supports images sizes: 1376x960, 688x480, 344x240
- fast mode switching
- support 2x2 binning
- standard serial SCCB interface
- supports MIPI data transfer rate of up to 1 Gbps
- one-lane MIPI serial output interface with slew rate control
- embedded 8K bits one-time programmable (OTP) memory for part identification, etc.
- two on-chip phase lock loop (PLL)
- programmable I/O drive capability
- built-in 1.2V regulator for core
- built-in temperature sensor
- ambient light sensor (ALS) mode


Ordering Information

- **OV09762-G04A**
  (color, chip probing, 200 µm backgrinding, reconstructed wafer with good die)
- **OV09762-G05A**
  (color, chip probing, 150 µm backgrinding, reconstructed wafer with good die)

Product Specifications

- **active array size:** 1376 x 960
- **power supply:**
  - **core:** 1.08 - 1.32V
  - **analog:** 2.7 - 3.0V
  - **I/O:** 1.62 - 1.98V
- **power requirements:**
  - I_{DD-A}: 23 mA
  - I_{DD-IO}: 37 mA
  - **XSHUTDOWN:** 5 µA
- **temperature range:**
  - **operating:** -40°C to 85°C junction temperature
  - **stable image:** -15°C to 65°C junction temperature
- **output formats:** 10-bit RAW RGB data
- **lens size:** 1/5.7"
- **lens chief ray angle:** 28.1°
- **input clock frequency:** 6 - 27 MHz
- **max S/N ratio:** 38.6 dB
- **dynamic range:** 73 dB @ 16x gain
- **maximum image transfer rate:**
  - **1376 x 960:** 30 fps
  - **688 x 480:** 60 fps
  - **344 x 240:** 120 fps
- **sensitivity:** 1450 mV/lux-sec
- **scan mode:** progressive
- **maximum exposure interval:** 1000 x t_{ROW}
- **pixel size:** 1.87 µm x 1.87 µm
- **dark current:** 31 e^-/sec @ 60°C junction temperature
- **image area:** 2618 µm x 1840.08 µm

Functional Block Diagram

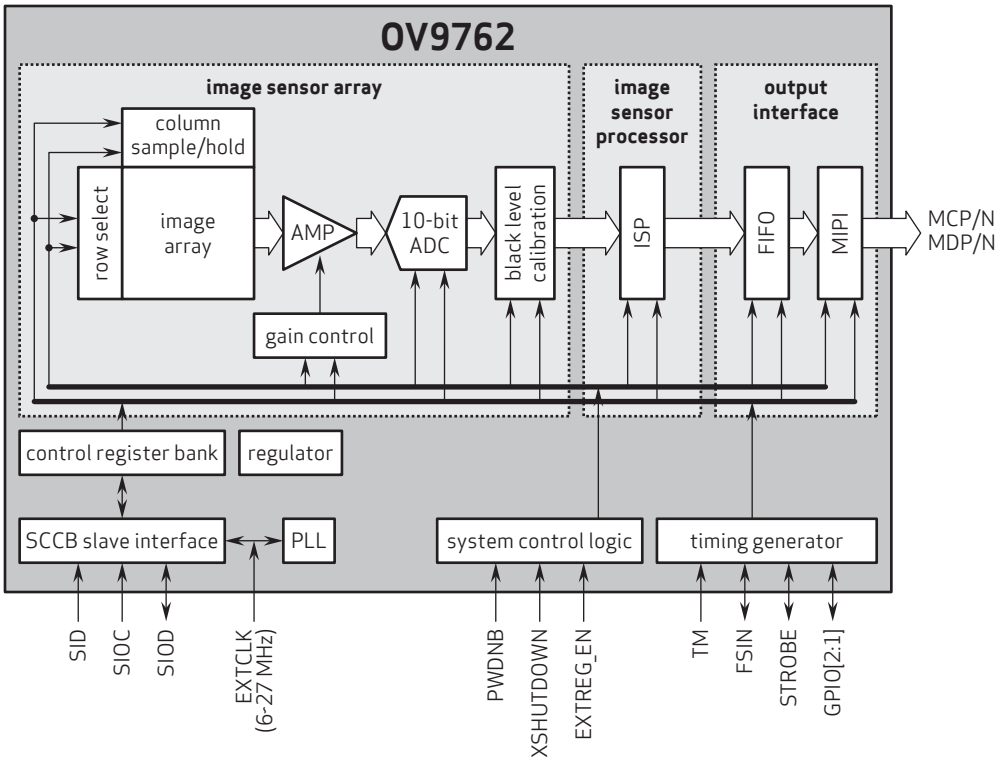

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision and the OmniVision logo are registered trademarks of OmniVision Technologies, Inc. CameraChip and OmniBSI-2 are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

Version 1.0, January, 2014