
# Type: P-4SB/AM,P-4SB/FM

## ◆ Product Description

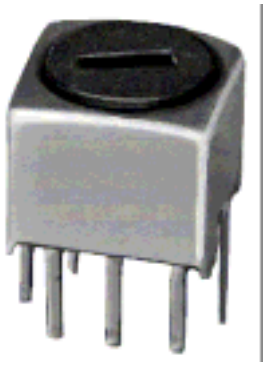


- 5.1×5.1mm Max.(L×W), 4.5mm Max. Height.
- Inductance:680μH Max., reference unloaded Q:65
- Operating frequency:25MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

## ◆ Feature


- Variable shielded type.
- Ideally used in Radio (AM, FM),TV. Transceiver
- RoHS Compliance

## ◆ Dimensions (mm)

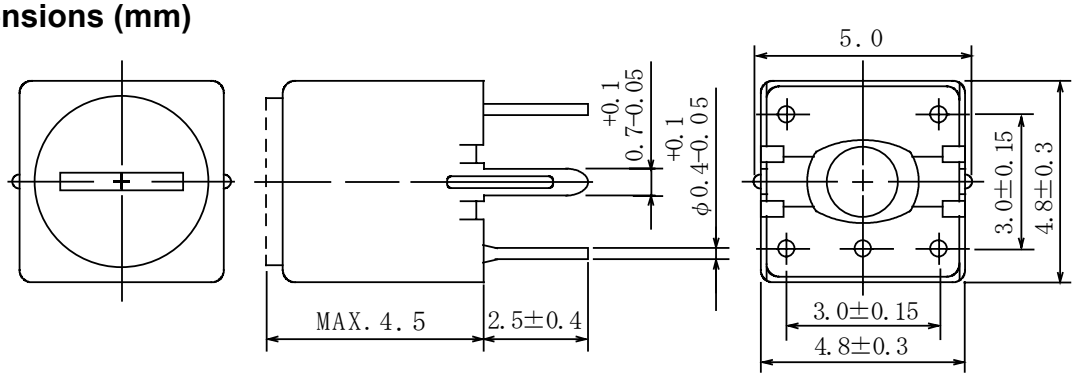


＊ Dimension does not include solder used on coil.
＊ Pin pitch shall be measured at the root of terminal.
＊ Dimension without tolerance are approx.

## ◆ Connection (Bottom View)




"S" is winding start

## ◆ Specification

| | P-4SB/AM | P-4SB/FM |
|---|---|---|
| Item | Measuring Condition 796KHz | (1-3) Measuring Condition 7.96MHz |
| Inductance | 640μH ± 6% Variable | 2.0μH ± 4% Variable |
| Unloaded Q | 55 Min. | 55 Min. |