SplitPower™

Split Bobbin Isolation Transformer

Series: P24X - Printed Circuit Mount, Horizontal 12 Pins


- Power Rating 2.4VA to 30VA
- Single Primary, 24V
- Frequency 50/60HZ
- Series or Parallel Secondary
- Dielectric Strength – 1500 Vrms
- Insulation Class B (130°C)




Agency Approvals:

- UL/cUL 5085-2 Recognized (File E47299)
- Insulation File No. E95662



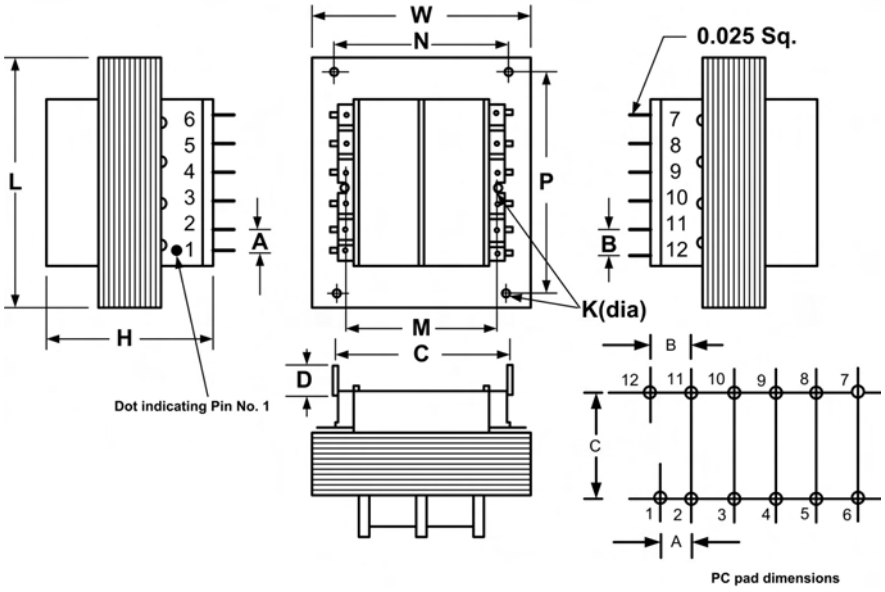

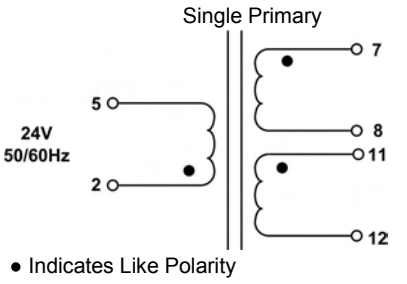

Primaries and Secondaries are designed to be used simultaneously. That is, they must be used either series or parallel connected (as one winding). Same applies to secondaries also.

VA Rating	Part Number	Secondary		Dimensions (Inches)							Mounting Dimension				Wgt. lbs
		Series	Parallel	L	W	H	A	B	C	D	K	M	N	P	
2.4	P24X-24-24	24VCT @ 100mA	12V @ 0.200A	1.38	1.12	1.13	0.15	0.20	0.86	0.172	-	1.00	-	-	0.230
20	P24X-20-24	24VCT @ 833mA	12V @ 1.670A	2.25	1.87	1.41	0.20	0.30	1.30	0.140	0.219 X 0.09*	1.69	1.50	1.88	0.780
30	P24X-30-24	24VCT @ 1.250A	12V @ 2.500A	2.25	1.87	1.79	0.20	0.30	1.30	0.140	0.219 X 0.09*	1.69	1.50	1.88	1.150

*** = Slots**

Any application, Any requirement, Contact us for our Custom Designs

Wabash Transformer
Sales Office:
300 W Factory Road, Addison IL 60101 ● Phone: (630) 628-9999 ● Fax: (630) 628-9922 ● www.wabashtransformer.com