P600A THRU P600M

GENERAL PURPOSE PLASTIC RECTIFIER

VOLTAGE:50 TO 1000V CURRENT: 6.0A

GULF SEMI


FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
High surge capability
High temperature soldering guaranteed
250°C/10sec/0.375"lead length at 5 lbs tension

MECHANICAL DATA

Terminal:Plated axial leads solderable per MIL-STD 202E, method 208C
Case:Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity:color band denotes cathode
Mounting position:any

P600\R-6

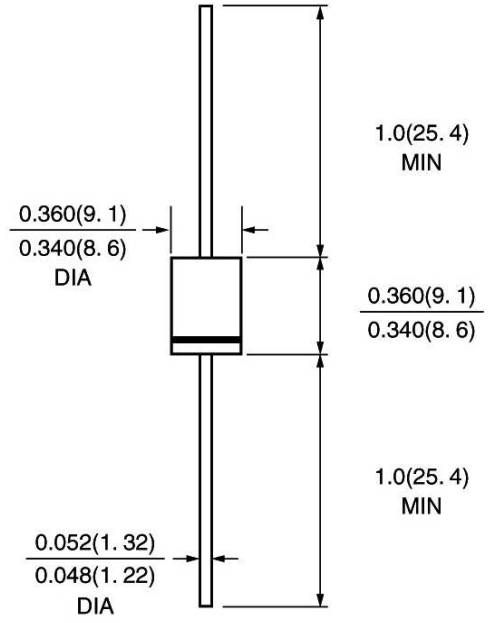

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	SYMBOL	P600A	P600B	P600D	P600G	P600J	P600K	P600M	units
* Maximum Recurrent Peak Reverse Voltage	Vrrm	50	100	200	400	600	800	1000	V
* Maximum RMS Voltage	Vrms	35	70	140	280	420	560	700	V
* Maximum DC blocking Voltage	Vdc	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =63°C	If(av)	6.0							A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	Ifsm	400.0							A
Maximum Instantaneous Forward Voltage at rated forward current	Vf	1.1							V
Maximum full load reverse current full cycle at T_L =75°C	Ir(av)	50.0							µA
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	Ir	10.0 100.0							µA µA
Typical Junction Capacitance (Note 1)	Cj	150.0							pF
Typical Thermal Resistance (Note 2)	R(ja)	10.0							°C/W
Storage and Operation Junction Temperature	Tstg	-50 to +175							°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.375"lead length, P.C. Board Mounted[1]

[1] Rev.4

FIG.1 - MAXIMUM FORWARD CURRENT DERATING CURRENT


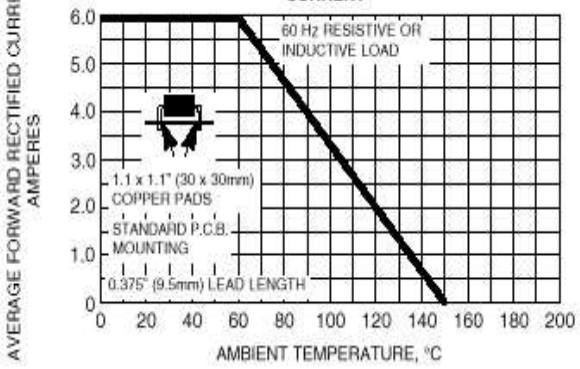


FIG. 2 - MAXIMUM FORWARD CURRENT DERATING CURVE

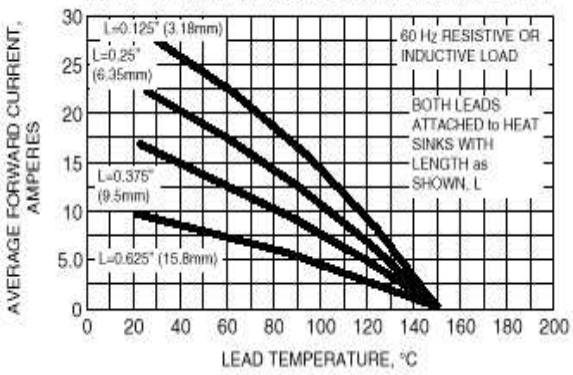

2

FIG. 3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

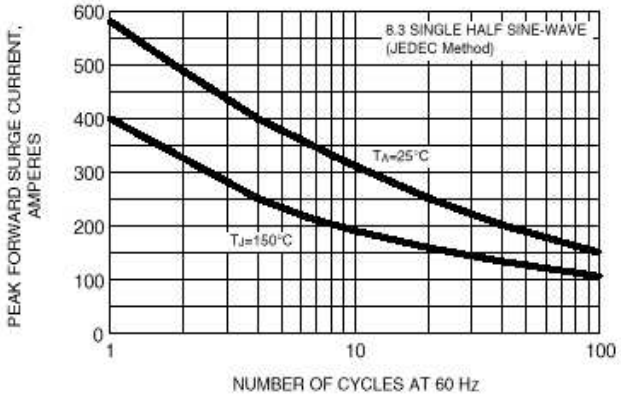


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

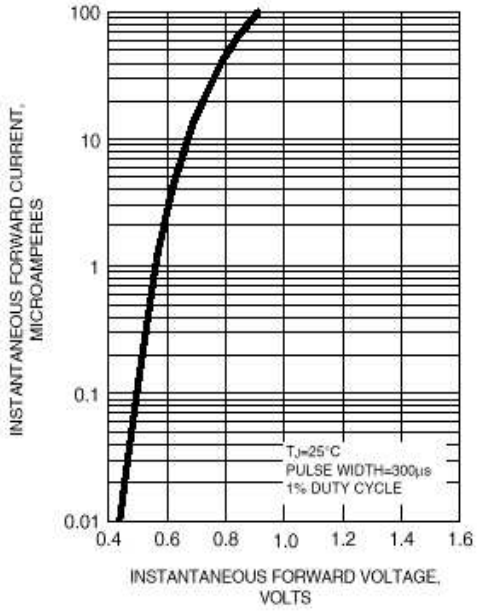


FIG. 5 - TYPICAL REVERSE CHARACTERISITIC

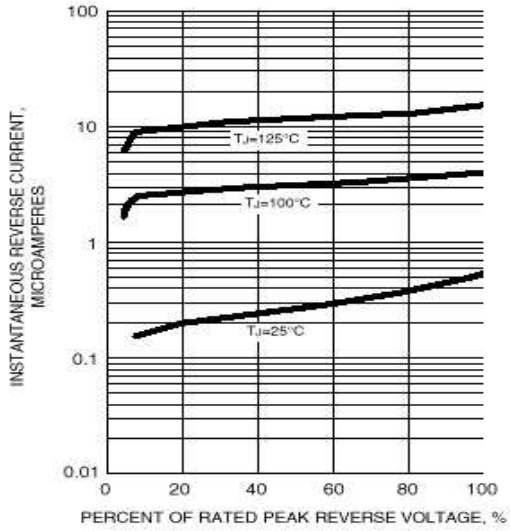


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

