


P6173

17" SXGA TFT Industrial LCD Monitor

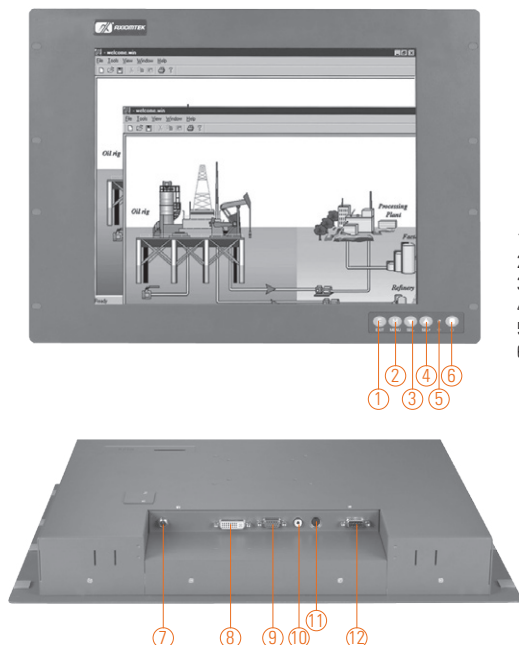

1. Exit
2. Menu
3. SEL-
4. SEL+
5. Power LED
6. Power switch

7. DC power input
8. DVI (Only for DVI-D)
9. VGA
10. Video (CVBS)
11. S-video
12. T/S port

Features

- 17" TFT 350 nits SXGA LCD
- NEMA 4/12 (IP65)- compliant panel mounting flat panel monitor
- Supports panel mount, wall mount, rack mount and VESA arm
- Resistive touchscreen
- Supports full range screw-type (locked) AC-in or 24V DC-in (option)
- Supports multi-signal inputs: VGA, S-video, Video and DVI



▲ Side view

Introduction

The P6173 is an slim industrial LCD monitor, which adopts 17-inch 350 nits high brightness SXGA LCD display and supports multi-signal interfaces including DVI, VGA, S-video, Video. Featuring NEMA 4/12 & IP65 compliant front bezel, screw-type adaptor plug design, and 12/24V DC-In means it is fit for all kinds of industrial environments. Moreover, the P6173 supports panel mount, wall mount, rack mount or VESA FPMPI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, users can enjoy free from space constraint. It is especially suitable for POI/POS, excellent HMI and all kinds of heavy-duty industrial fields.

Specifications

Front Bezel	NEMA 4/12 (IP65)-compliant, metal front bezel	
Mounting	Supports panel mount, wall mount, rack mount or VESA arm FPMPI mounting (video electronics standards association flat panel monitor physical mounting interface)	
LCD Panel	Display	Type 17" TFT SXGA LCD
	Max. Resolution	1280 x 1024
	Max. Colors	16.7M
	Active Area (mm)	337.92 x 270.33
	Pixel Pitch (mm)	0.264 x 0.264
	Response Time	5 ms
	Backlight	LED
	Backlight MTBF	30,000 hrs
	Viewing Angle (H/V)	170°/160°
	Contrast Ratio	1000 (TYP.)
	Brightness (cd/m ²)	350 nits
Display Control	OSD (on screen display)	
Display Mode	VGA 640 x 350 (70Hz), VGA 640 x 480 (60/72/75Hz), VGA 720 x 400 (70Hz), SVGA 800 x 600 (60/72/75Hz), XGA 1024 x 768 (60/72/75Hz), SXGA 1280 x 1024 (60/72/75Hz)	

Specifications

Input Signal	VGA Video: R.G.B Analog 0.7v Peak-to-Peak DVI (Only for DVI-D) Touchscreen: Serial RS-232 or USB Video (optional) S-Video (optional)
I/O Connectors	1 x RS-232 or USB for touchscreen version 1 x VGA input 1 x RCA for video (optional) 1 x S-Video for video (optional) 1 x DVI 1 x Screw-type DC power input
Power Adapter	Screw-type external AC / DC power adapter
Touchscreen	Thickness Resistive: 3.2 mm Light Transmission Resistive: 80% Power Consumption Resistive: +5V @ 100mA Touch Life Resistive: 35million touches Controller interface: RS-232 D-type 9-pin male connector or USB
Dimensions	482 mm (19") (W) x 60 mm (2.36") (D) x 360 mm (14.2") (H)
Packing Dimensions	610 mm (24.02") (W) x 260 mm (10.24") (D) x 590 mm (23.23") (H)
Weight (net/gross)	5.5 kg (12.12 lb)/12.7 kg (28 lb)
Environment	Operating temperature: 0° ~ +55°C (+32°F ~ +131°F) Storage temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 20%~90%@40°C, non-condensing
Certificate	CE

Ordering Information

P6173	
AC Power	Panel Mount Monitor
	Resistive (RS-232) P6173PR-AC-RS-V3-RC-US-EU
	Resistive (USB) P6173PR-AC-U-V3-RC-US-EU
	Glass P6173PG-AC-V3-RC-US-EU
24VDC Power	Panel Mount Monitor
	Resistive (RS-232) P6173PR-24VDC-RS-V3-RC
	Resistive (USB) P6173PR-24VDC-U-V3-RC
	Glass P6173PG-24VDC-V3-RC
P6173L (Input: VGA and DVI only)	
AC Power	Panel Mount Monitor
	Resistive (RS-232) P6173LPR-AC-RS-V3-RC-US-EU
	Resistive (USB) P6173LPR-AC-U-V3-RC-US-EU
	Glass P6173LPG-AC-V3-RC-US-EU
24VDC Power	Panel Mount Monitor
	Resistive (RS-232) P6173LPR-24V-DC-RS-V3-RC
	Resistive (USB) P6173LPR-24V-DC-RS-V3-RC
	Glass P6173LPG-24V-DC-V3-RC

* Specification and certifications are based on options and may vary.

Optional Accessories

ARM-VM-101	VESA ARM (clamp type)
ARM-VM-105	VESA ARM (wall mount type)
Wall mounting & desktop stand	



▲ Stand kit



▲ Various mounting ways: panel/ wall/ VESA



▲ Screw-type power input



▲ Phoenix-type power input

Dimensions

