InSb photoconductive detector
P6606 series



Thermoelectrically cooled detectors capable of long-term measurements

Features

- Thermoelectric cooling ensures high speed and high sensitivity up to 6.5 µm.
- Photoconductive element that changes electrical resistance by input of IR radiation
- Easy-to-use detector/preamp modules are also available.

Applications

- Environment measurements (gas analysis, etc.)
- Radiation thermometers (5 µm band)
- FTIR
- IR laser detection

Accessories (optional)

- Heatsink for one-stage TE-cooled type A3179
- Heatsink for two-stage TE-cooled type A3179-01
- Heatsink for three-stage TE-cooled type A3179-04
- Temperature controller C1103-05 (-75 to -25 ˚C)
  C1103-07 (-30 to +20 ˚C)
- Preamp C5185
- Infrared detector module with preamp
  C4631-03 (P6606-310)

■ Specifications / Absolute maximum ratings

Type No.	Dimensional outline/ Window material *1	Package	Cooling	Active area (mm)	Absolute maximum ratings: Thermistor power dissipation (mW)	Absolute maximum ratings: TE-cooler power dissipation (A)	Absolute maximum ratings: Allowable current (mA)	Absolute maximum ratings: Operating temperature Topr (°C)	Absolute maximum ratings: Storage temperature Tstg (°C)
P6606-110	①/S	TO-8	One-stage TE-cooled	1 × 1	0.2	1.5	40	-40 to +60	-55 to +60
P6606-210			Two-stage TE-cooled			1.0			
P6606-305	②/S	TO-3	Three-stage TE-cooled	0.5 × 0.5		1.0	20		
P6606-310				1 × 1			40		
P6606-320				2 × 2			60		


*1: Window material S: Sapphire glass

■ Electrical and optical characteristics (Typ. unless otherwise noted)

Type No.	Measurement condition: Element temperature T (°C)	Peak sensitivity wavelength λp (µm)	Cut-off wavelength λc (µm)	Photo sensitivity S λ=λp Vs=15 V (V/W)	D* (500, 1200, 1): Min. (cm·Hz$^{1/2}$/W)	D* (500, 1200, 1): Typ. (cm·Hz$^{1/2}$/W)	D* (λp, 1200, 1) (cm·Hz$^{1/2}$/W)	Rise time tr 0 to 63 % (µs)	Dark resistance Rd (Ω)
P6606-110	-10	5.5	6.7	10	7 × 10^7	2 × 10^8	1 × 10^9	0.4	20
P6606-210	-30		6.5	50	1.5 × 10^8	5 × 10^8	2.5 × 10^9		25
P6606-305	-60		6.3	2500	1 × 10^9	2 × 10^9	1 × 10^{10}		150
P6606-310				650	1 × 10^9	2 × 10^9	1 × 10^{10}		80
P6606-320				150	5 × 10^8	1 × 10^9	5 × 10^9		80


SOLID STATE DIVISION

■ Spectral response

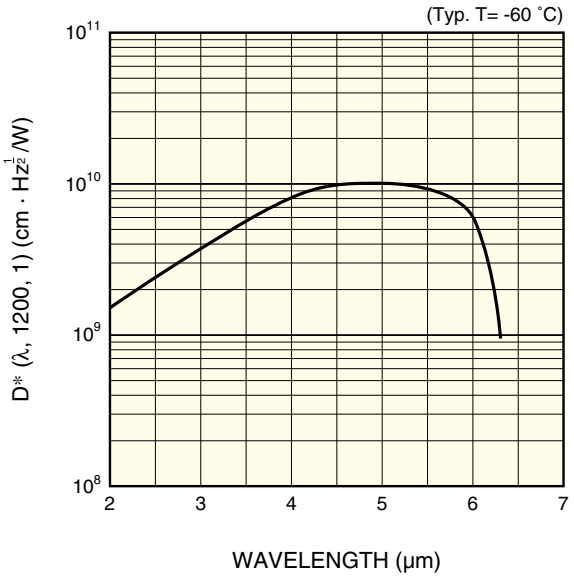


KIRDB0166EB

■ D* vs. element temperature

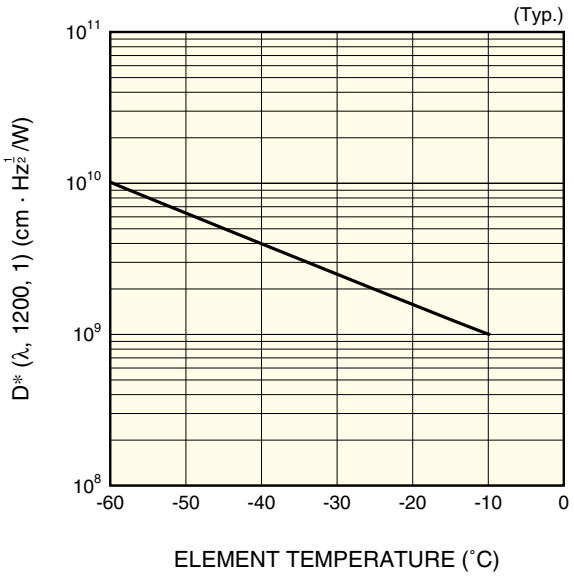


KIRDB0167EA

■ Thermistor temperature characteristic

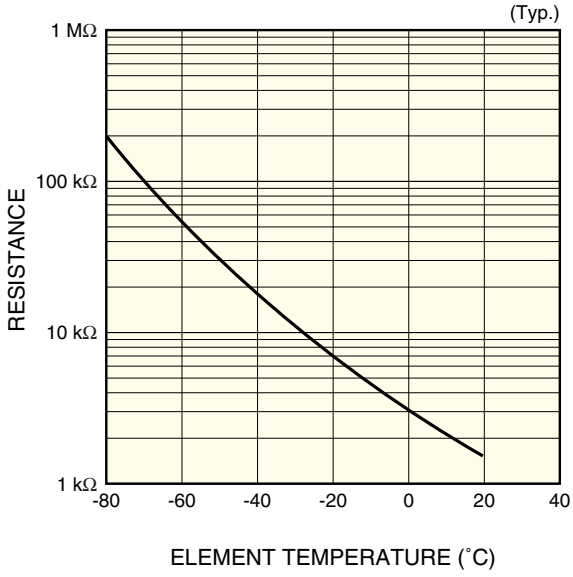


KIRDB0168EA

■ Cooling characteristics of TE-cooler

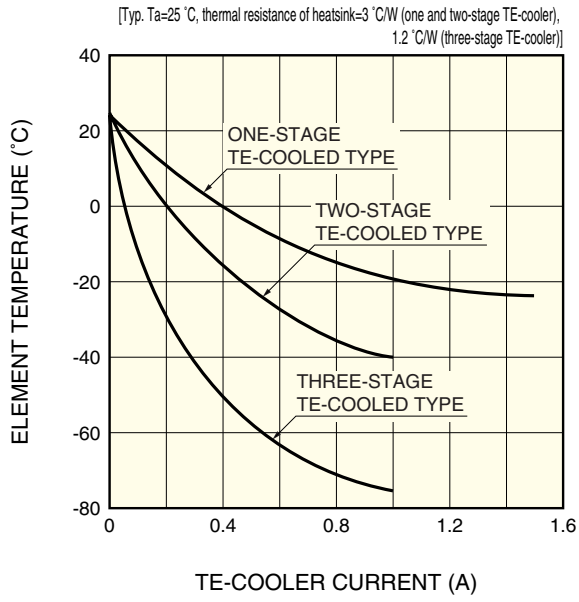


KIRDB0177EA

■ Current vs. voltage characteristics of TE-cooler

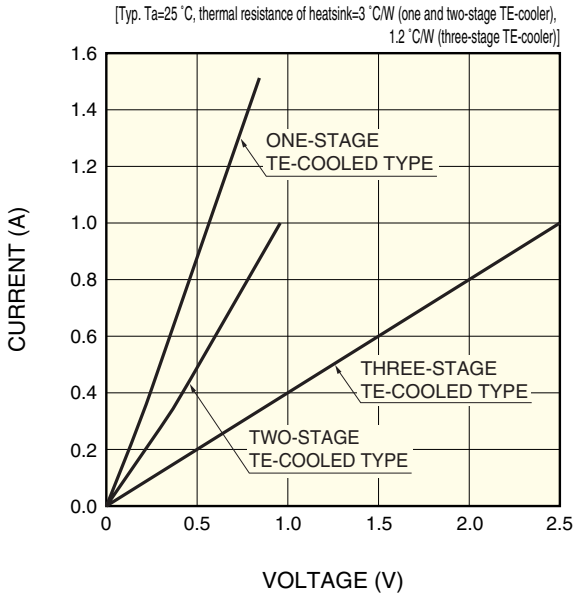

KIRDB0176EB


■ Measurement circuit

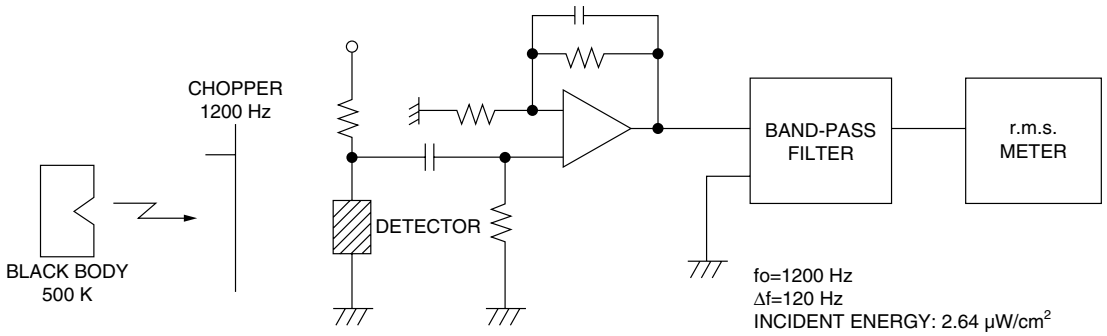

KIRDC0005EA

■ Dimensional outlines (unit: mm)


① P6606-110/-210

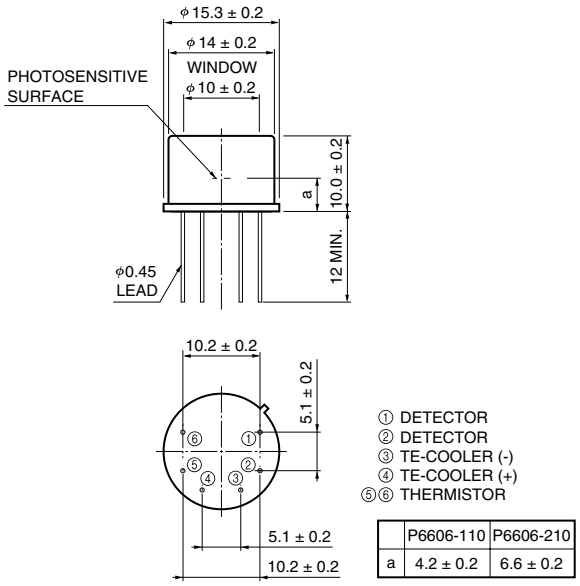

	P6606-110	P6606-210
a	4.2 ± 0.2	6.6 ± 0.2

KIRDA0126EA

② P6606-305/-310/-320

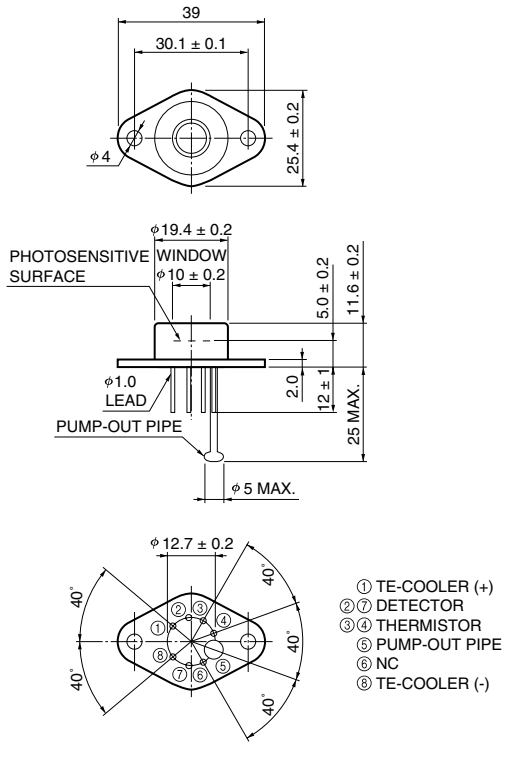

KIRDA0127EA

HAMAMATSU
Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.
Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2002 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division
1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, http://www.hamamatsu.com
U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658
France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01
Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KIRD1026E04
Sep. 2002 DN