Telefon: +49 (0) 6135 931069
Telefax: +49 (0) 6135 931070
www.peak-electronics.de
info@peak-electronics.de

M1 SERIES **P6CUI-XXXXXXZ 1KV ISOLATED 1W UNREGULATED DUAL SEPARATE OUTPUT SIP7**

Available Inputs:
5, 12 and 24 VDC

Available Outputs:
(++) 3.3, 5, 7.2, 12, 15 and 18 VDC

Other specifications please enquire

Electrical Specifications
(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications	
Voltage range	+/- 10 %
Filter	Capacitors
Isolation Specifications	
Rated voltage	1000 VDC
Leakage current	1 mA
Resistance	10^9 Ohm
Capacitance	60 pF typ.
Output Specifications	
Voltage accuracy	+/- 5 %, max.
Ripple and noise (at 20 MHz BW)	75 mV p-p, max.
Short circuit protection	Momentary
Line voltage regulation	+/- 1,2 % / 1,0 % of Vin
Load voltage regulation	+/- 8 %, load = 20 ~ 100 %
Temperature coefficient	+/- 0,02 % / °C
General Specifications	
Efficiency	70 % to 85 %
Switching frequency	125 KHz, typ.
Environmental Specifications	
Operating temperature (ambient)	- 40° C to + 85° C
Storage temperature	- 55 °C to + 125 °C
Derating	See graph
Humidity	Up to 90 %, non condensing
Cooling	Free air convection
Physical Characteristics	
Dimensions SIP	19,50 x 6,00 x 9,50 mm 0,76 x 0,24 x 0,37 inches
Weight	2 g
Case material	Non conductive black plastic

Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6CUI-050505Z	5	16	277	5/5	100/100	72
P6CUI-050515Z	5	20	250	5/15	100/33	80
P6CUI-120505Z	12	11	119	5/5	100/100	70
P6CUI-120512Z	12	10	104	5/12	100/42	80
P6CUI-120515Z	12	13	106	5/15	100/33	78
P6CUI-240505Z	24	6	54	5/5	100/100	76
P6CUI-240909Z	24	10	56	9/9	56/56	75

Dimensions

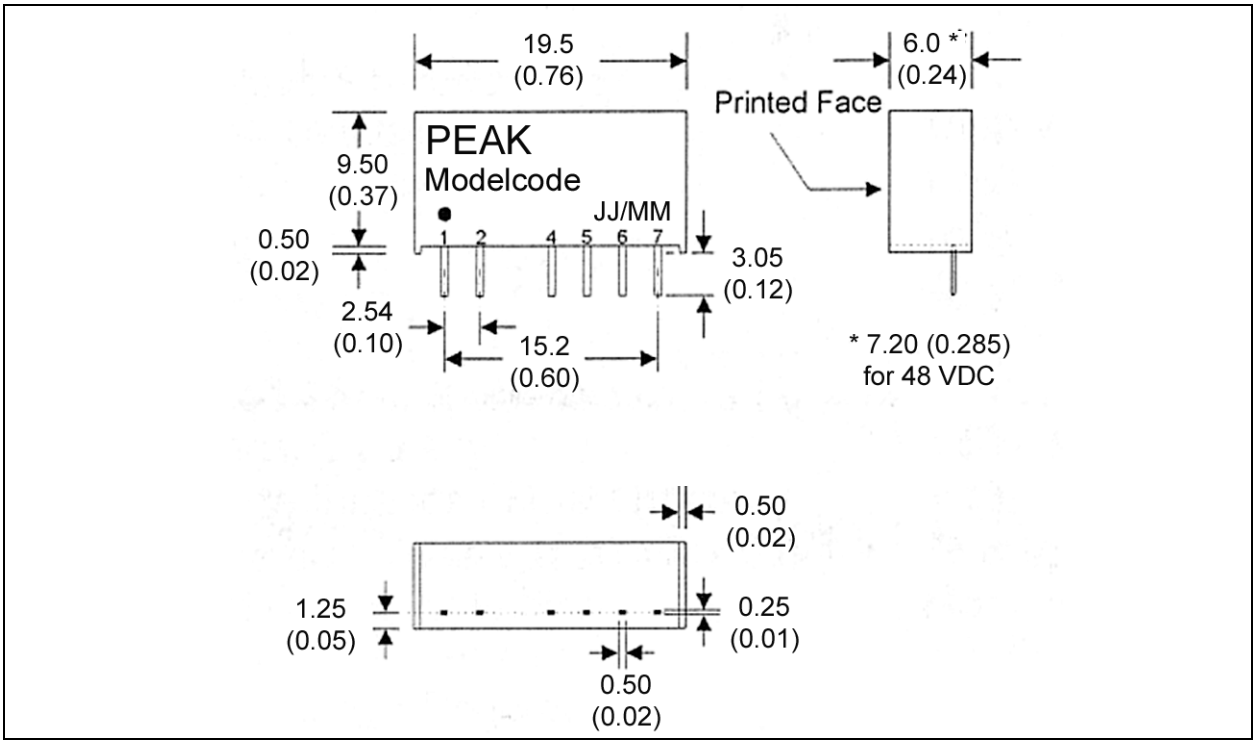

Derating Graph and Pinning

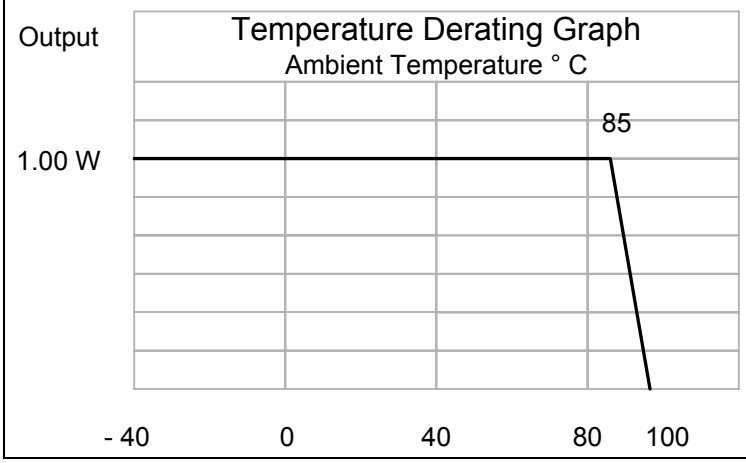

Pin #	Connection Dual Separate		
1	+	V	Input
2	-	V	Input
4	+	V1	Output
5	-	V1	Output
6	+	V2	Output
7	-	V2	Output

Specification can be changed without notice.

Copyright PEAK electronics GmbH