8228
SYSTEM CONTROLLER AND BUS DRIVER FOR 8080A CPU

- **Single Chip System Control for MCS®-80 Systems**
- **Built-In Bidirectional Bus Driver for Data Bus Isolation**
- **Allows the Use of Multiple Byte Instructions (e.g. CALL) for Interrupt Acknowledge**
- **Reduces System Package Count**
- **User Selected Single Level Interrupt Vector (RST 7)**
- **Available in EXPRESS — Standard Temperature Range**
- **Available in 28-Lead Cerdip and Plastic Packages**

(See Packaging Spec, Order #231369)

1

The Intel 8228 is a single chip system controller and bus driver for MCS®-80. It generates all signals required to directly interface MCS-80 family RAM, ROM, and I/O components.

A bidirectional bus driver is included to provide high system TTL fan-out. It also provides isolation of the 8080 data bus from memory and I/O. This allows for the optimization of control signals, enabling the systems designer to use slower memory and I/O. The isolation of the bus driver also provides for enhanced system noise immunity.

A user selected single level interrupt vector (RST 7) is provided to simplify real time, interrupt driven, small system requirements. The 8228 also generates the correct control signals to allow the use of multiple byte instructions (e.g., CALL) in response to an interrupt acknowledge by the 8080A. This feature permits large, interrupt driven systems to have an unlimited number of interrupt levels.

The 8228 is designed to support a wide variety of system bus structures and also reduce system package count for cost effective, reliable design of MCS-80 systems.

NOTE:
The specifications for the 3228 are identical with those for the 8228.

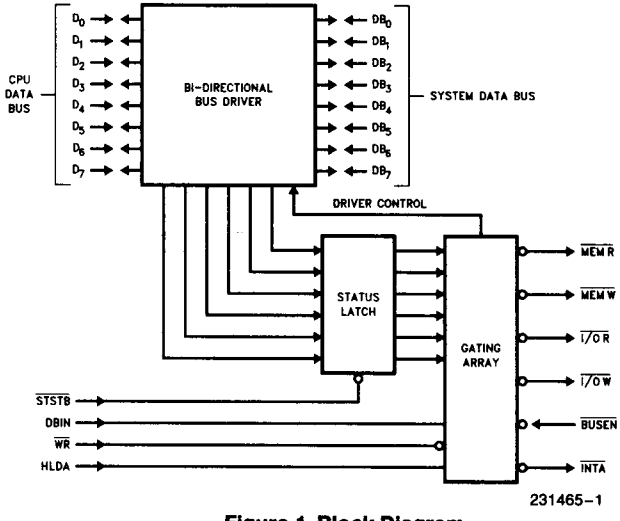


Figure 1. Block Diagram




Figure 2. Pin Configuration

D7-D0	Data Bus (8080 Side)
DB7-DB0	Data Bus (System Side)
I/OR	I/O Read
I/OW	I/O Write
MEMR	Memory Read
MEMW	Memory Write
DBIN	DBIN (from 8080)

INTA	Interrupt Acknowledge
HLDA	HLDA (from 8080)
WR	WR (from 8080)
BUSEN	Bus Enable Input
STSTB	Status Strobe (from 8224)
VCC	+5V
GND	0 Volts

ABSOLUTE MAXIMUM RATINGS*

Temperature Under Bias ..... 0°C to +70°C
Storage Temperature ..... −65°C to +150°C
Supply Voltage, V_{CC} ..... −0.5V to +7V
Input Voltage ..... −1.5 to +7V
Output Current ..... 100 mA

NOTICE: This is a production data sheet. The specifications are subject to change without notice.

**WARNING: Stressing the device beyond the "Absolute Maximum Ratings" may cause permanent damage. These are stress ratings only. Operation beyond the "Operating Conditions" is not recommended and extended exposure beyond the "Operating Conditions" may affect device reliability.*

D.C. CHARACTERISTICS T_A = 0°C to +70°C, V_{CC} = 5V ±5%

Symbol	Parameter		Limits			Unit	Test Conditions
			Min	Typ(1)	Max		
V_C	Input Clamp Voltage, All Input			0.75	−1.0	V	V_{CC} = 4.75V; I_C = −5 mA
I_F	Input Load Current	$\overline{STSTB}$			500	µA	V_{CC} = 5.25V
		D_2 & D_6			750	µA	V_F = 0.45V
		D_0, D_1, D_4, D_5 & D_7			250	µA	
		All Other Inputs			250	µA	
I_R	Input Leakage Current	$\overline{STSTB}$			100	µA	V_{CC} = 5.25V; V_R = 5.25V
		DB_0–DB_7			20	µA	
		All Other Inputs			100	µA	
V_{TH}	Input Threshold Voltage, All Inputs		0.8		2.0	V	V_{CC} = 5V
I_{CC}	Power Supply Current			140	190	mA	V_{CC} = 5.25V
V_{OL}	Output Low Voltage	D_0–D_7			0.45	V	V_{CC} = 4.75V; I_{OL} = 2 mA
		All Other Outputs			0.45	V	I_{OL} = 10 mA
V_{OH}	Output High Voltage	D_0–D_7	3.6	3.8		V	V_{CC} = 4.75V; I_{OH} = −10µA
		All Other Outputs	2.4			V	I_{OH} = −1 mA
I_{OS}	Short Circuit Current, All Outputs		15		90	mA	V_{CC} = 5V
$I_{O\ (off)}$	Off State Output Current All Control Outputs				100	µA	V_{CC} = 5.25V; V_O = 5.25V
					−100	µA	V_O = 0.45V
I_{INT}	INTA Current				5	mA	(See INTA Test Circuit)

NOTE:
1. Typical values are for T_A = 25°C and nominal supply voltages.

CAPACITANCE V_{BIAS} = 2.5V, V_{CC} = 5.0V, T_A = 25°C, f = 1 MHz


1. This parameter is periodically sampled and not 100% tested.

Symbol	Parameter	Limits			Unit
		Min	Typ(1)	Max	
C_{IN}	Input Capacitance		8	12	pF
C_{OUT}	Output Capacitance Control Signals		7	15	pF
I/O	I/O Capacitance (D or DB)		8	15	pF

A.C. CHARACTERISTICS T_A = 0°C to +70°C, V_{CC} = 5V ±5%

Symbol	Parameter	Limits		Unit	Conditions
		Min	Max		
t_{PW}	Width of Status Strobe	22		ns	
t_{SS}	Setup Time, Status Inputs D_0–D_7	8		ns	
t_{SH}	Hold Time, Status Inputs D_0–D_7	5		ns	
t_{DC}	Delay from $\overline{STSTB}$ to any Control Signal	20	60	ns	C_L = 100 pF
t_{RR}	Delay from DBIN to Control Outputs		30	ns	C_L = 100 pF
t_{RE}	Delay from DBIN to Enable/Disable 8080 Bus		45	ns	C_L = 25 pF
t_{RD}	Delay from System Bus to 8080 Bus during Read		30	ns	C_L = 25 pF
t_{WR}	Delay from $\overline{WR}$ to Control Outputs	5	45	ns	C_L = 100 pF
t_{WE}	Delay to Enable System Bus DB_0–DB_7 after $\overline{STSTB}$		30	ns	C_L = 100 pF
t_{WD}	Delay from 8080 Bus D_0–D_7 to System Bus DB_0–DB_7 during Write	5	40	ns	C_L = 100 pF
t_E	Delay from $\overline{\text{System Bus Enable}}$ to System Bus DB_0–DB_7		30	ns	C_L = 100 pF
t_{HD}	HLDA to Read Status Outputs		25	ns	
t_{DS}	Setup Time, System Bus Inputs to HLDA	10		ns	
t_{DH}	Hold Time, System Bus Inputs to HLDA	20		ns	C_L = 100 pF


A.C. TESTING LOAD CIRCUIT



231465-3


For D_0–D_7: R_1 = 4 KΩ, R_2 = ∞Ω, C_L = 25 pF.
For all other outputs: R_1 = 500Ω, R_2 = 1 KΩ, C_L = 100 pF.

INTA Test Circuit (for RST 7)

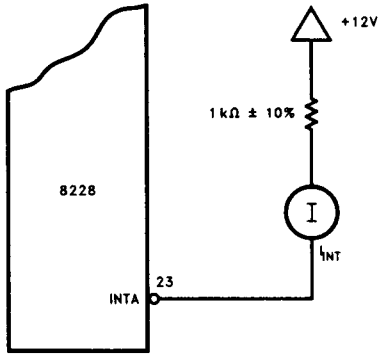

231465-4

WAVEFORMS

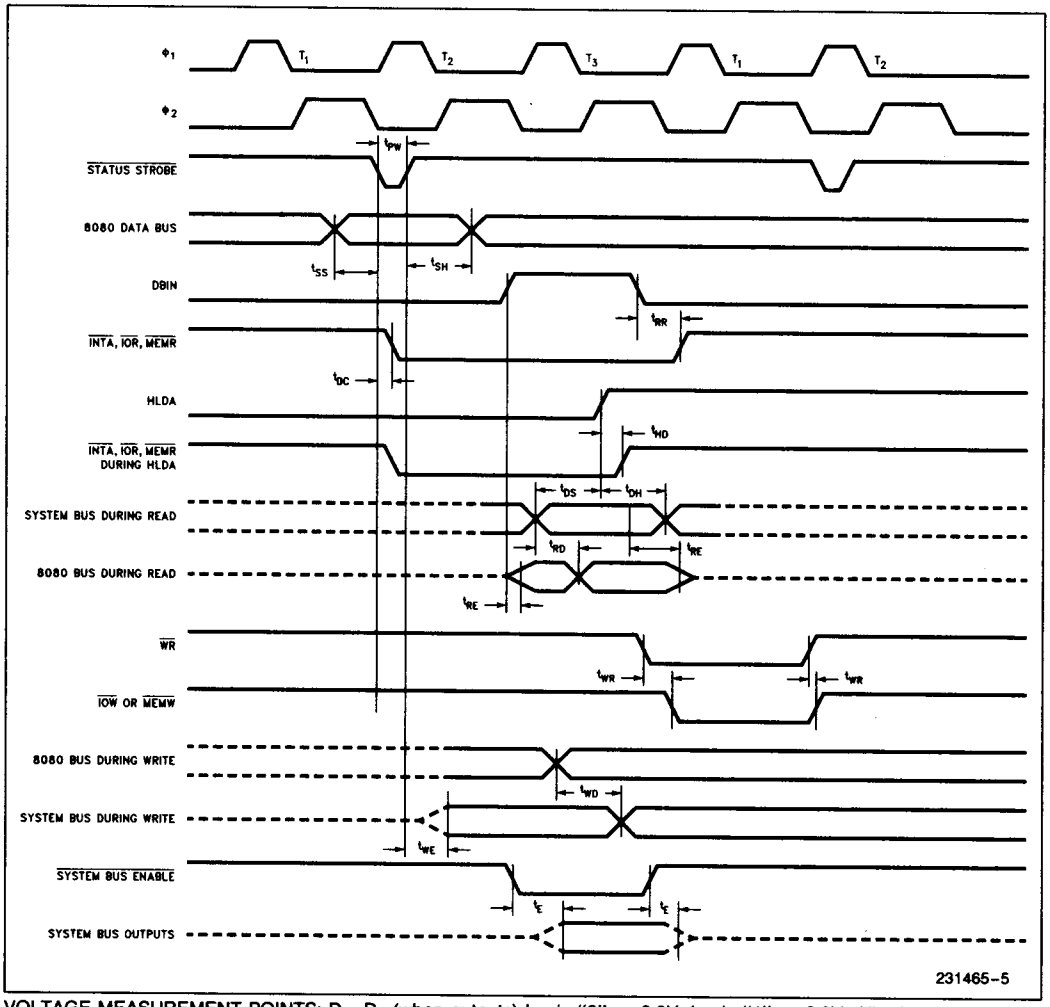

VOLTAGE MEASUREMENT POINTS: D_0–D_7 (when outputs) Logic "0" = 0.8V, Logic "1" = 3.0V. All other signals measured at 1.5V.