


**Recommended Noise Filter
NAC-16-472**


High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* The Noise Filter is recommended
to connect with several devices.

- ① Series name
② Output wattage
③ Universal input
④ Output voltage
⑤ Optional
C : with Coating
G : Low leakage current
R : Positive logic control
W : with Alarm signal

MODEL	PAA600F-3	PAA600F-5	PAA600F-12	PAA600F-15	PAA600F-24	PAA600F-48
MAX OUTPUT WATTAGE[W]	360	600	636	645	648	624
DC OUTPUT	3V 120A	5V 120A	12V 53A	15V 43A	24V 27A	48V 13A

SPECIFICATIONS

	MODEL	PAA600F-3	PAA600F-5	PAA600F-12	PAA600F-15	PAA600F-24	PAA600F-48	
INPUT	VOLTAGE[V]		AC85 - 264 1 ϕ or DC120 - 340					
	CURRENT[A]	ACIN 100V	5.4typ	8.2typ				
		ACIN 200V	2.7typ	4.1typ				
	FREQUENCY[Hz]		50/60 (47 - 63)					
	EFFICIENCY[%]		70typ	76typ	80typ	81typ	83typ	83typ
	POWER FACTOR	ACIN 100V	0.99typ (Io=100%)					
		ACIN 200V	0.95typ (Io=100%)					
	INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%)					
ACIN 200V		40typ (Io=100%)						
LEAKAGE CURRENT[ma]		0.75max (60Hz, According to UL, CSA, VDE and DEN-AN)						
OUTPUT	VOLTAGE[V]		3	5	12	15	24	48
	CURRENT[A]		120	120	53	43	27	13
	LINE REGULATION[mV]		20max	20max	48max	60max	96max	192max
	LOAD REGULATION[mV]		40max	40max	100max	120max	150max	300max
	RIPPLE[mVp-p]	0 to +50℃ *1	80max	80max	120max	120max	120max	150max
		-10 - 0℃ *1	140max	140max	160max	160max	160max	200max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	120max	120max	150max	150max	150max	200max
		-10 - 0℃ *1	160max	160max	180max	180max	180max	300max
	TEMPERATURE REGULATION[mV]	0 to +50℃	40max	50max	120max	150max	240max	480max
		-10 to +50℃	50max	60max	150max	180max	290max	580max
	DRIFT[mV]		*2 12max	20max	48max	60max	96max	192max
	START-UP TIME[ms]		500max (ACIN 85V, Io=100%)					
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)					
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		2.85 - 3.45	±10%					
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION		4.00 - 5.25V	Works at 115 - 140% of rating				
	OPERATING INDICATION		LED (Green)					
	REMOTE SENSING		Provided					
	REMOTE ON/OFF		Provided					
ISOLATION	INPUT-OUTPUT · RC		AC3.000V 1minute, Cutoff current = 10mA max.DC500V 50MΩ min (At Room Temperature)					
	INPUT-FG		AC2.000V 1minute, Cutoff current = 10mA max.DC500V 50MΩ min (At Room Temperature)					
	OUTPUT · RC-FG		AC500V 1minute, Cutoff current = 100mA max.DC500V 50MΩ min (At Room Temperature)					
	OUTPUT-RC		AC100V 1minute, Cutoff current = 100mA max,DC100V 50MΩ min (At Room Temperature)					
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-10 to +65℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3.000m (10.000feet) max					
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9.000m (30.000feet) max					
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis					
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, EN60950-1, EN50178, CSA C22.2 No.234 Complies with DEN-AN and IEC60950-1					
	CONDUCTED NOISE		Complies with FCC-B, CISPR22-B, EN55022-B, VCCI-B					
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2					
OTHERS	CASE SIZE/WEIGHT		190 X 92 X 200mm (without terminal block and screw) (W X H X D) /4.0kg max					
	COOLING METHOD		Forced cooling (internal fan)					

*1 According to 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN : RM101).

*2 Drift is change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


* Avoid prolonged use under over-load.

Distribution:

RSG Electronic Components GmbH ■ Sprendlinger Landstr. 115 ■ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ■ Fax +49 69 984047-77 ■ info@rsg-electronic.de ■ www.rsg-electronic.de


Änderungen vorbehalten / subject to change without notice

External view

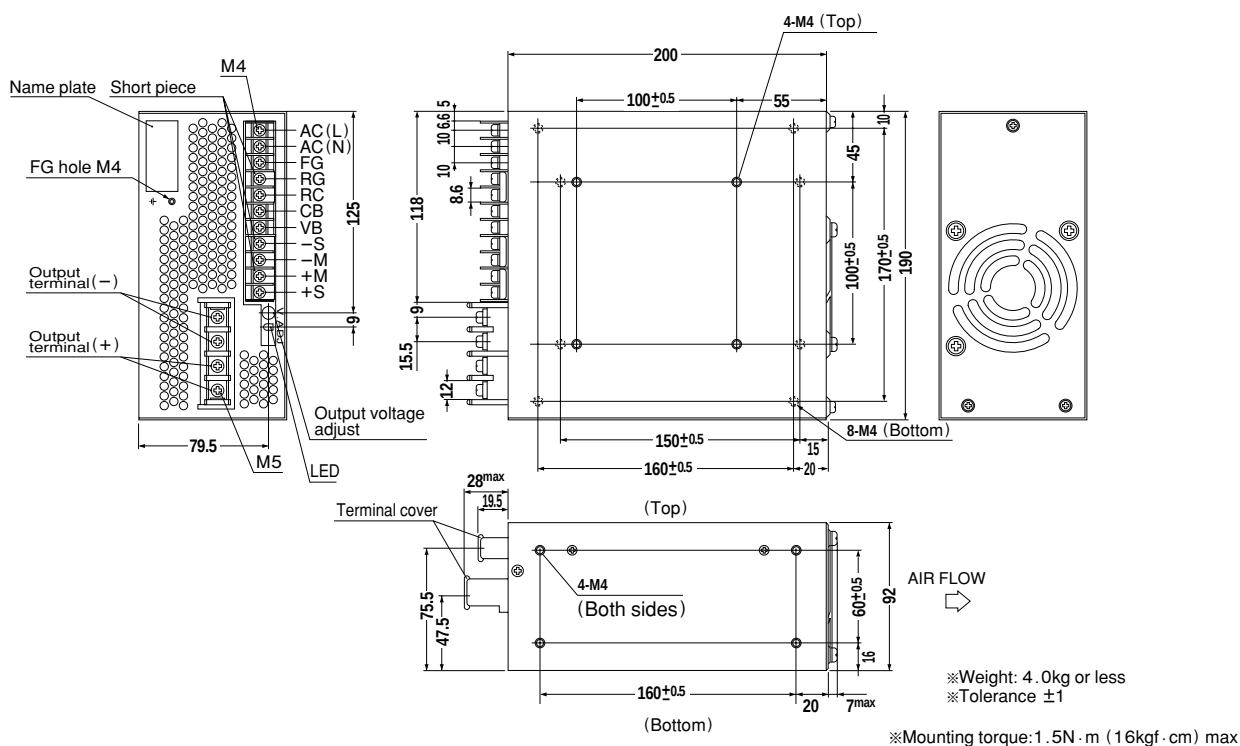


Performance data


RISE TIME & FALL TIME (PAA600F-5)

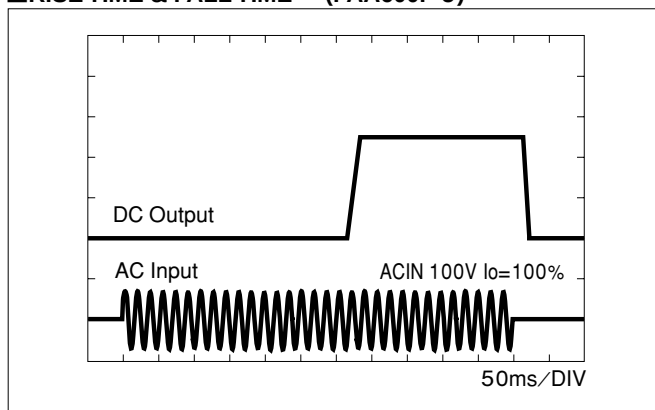


EFFICIENCY (PAA600F-5)

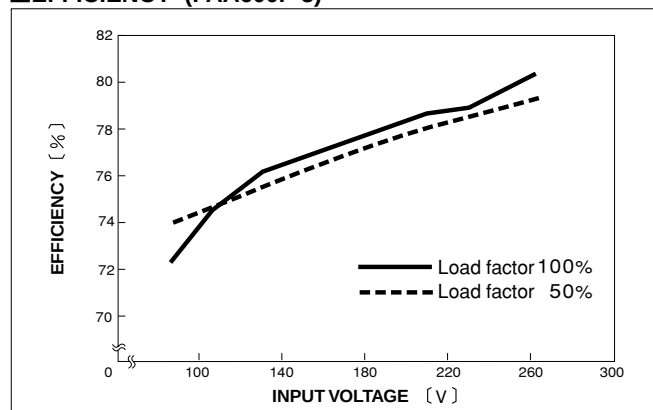

HARMONIC CURRENT (PAA600F-5)

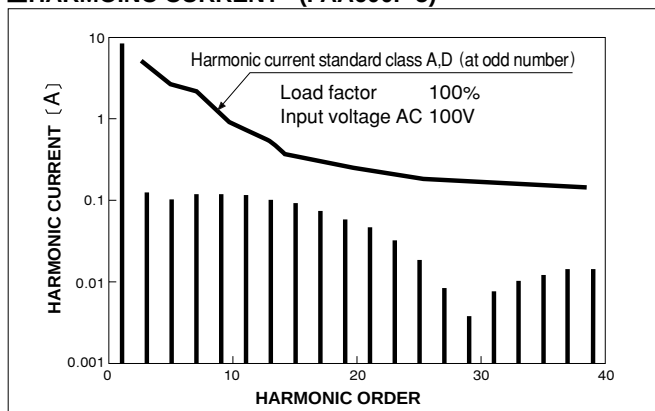

HARMONIC CURRENT (PAA600F-5)

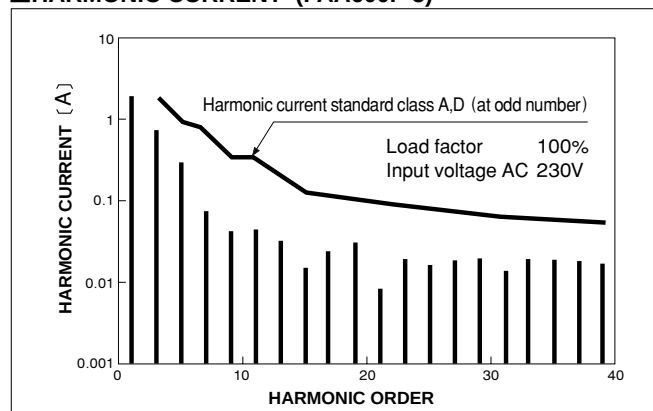

Distribution:

RSG Electronic Components GmbH ■ Spremlinger Landstr. 115 ■ D-63069 Offenbach/Germany
 Tel. +49 69 984047-0 ■ Fax +49 69 984047-77 ■ info@rsg-electronic.de ■ www.rsg-electronic.de

Änderungen vorbehalten / subject to change without notice