Nihon Inter Electronics Corporation

THYRISTOR MODULE

66A / 1200 to 1600V

P A T 3 0 1 2 P A T 3 0 1 6

P A H 3 0 1 2 P A H 3 0 1 6


FEATURES

* Isolated Base
* Dual Thyristors or Thyristor and Diode Anti-Parallel Circuit
* High Surge Capability
* UL Recognized, File No. E187184


TYPICAL APPLICATIONS

* AC phase control
* AC switch


PAT



PAH



OUTLINE DRAWING

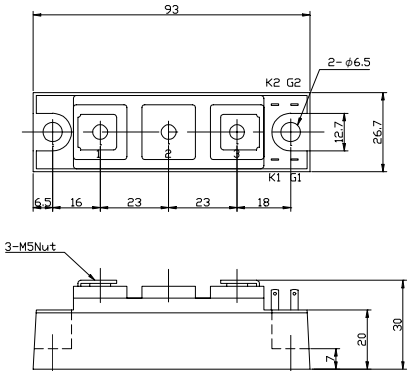

Approx Net Weight:155g

Maximum Ratings

Parameter	Symbol	Grade		Unit
		PAT/PAH3012	PAT/PAH3016	
Repetitive Peak Off-State Voltage	V_{DRM}	1200	1600	V
Non Repetitive Peak Off-State Voltage	V_{DSM}	1300	1700	

Parameter			Conditions	Max Rated Value	Unit
RMS On-State Current		$I_{T(RMS)}$	50Hz Half Sine Wave condition Tc=96℃	66	A
Surge On-State Current		I_{FSM}	50 Hz Half Sine Wave,1Pulse Non-Repetitive	600	A
I Squared t		I^2t	2msec to 10msec	1800	A^2s
Critical Rate of Turned-On Current		di/dt	V_D=2/3V_{DRM}, I_{TM}=2·I_O, Tj=125℃ I_G=200mA, di_G/dt=0.2A/μs	100	A/μs
Peak Gate Power		P_{GM}		5	W
Average Gate Power		$P_{G(AV)}$		1	W
Peak Gate Current		I_{GM}		2	A
Peak Gate Voltage		V_{GM}		10	V
Peak Gate Reverse Voltage		V_{RGM}		5	V
Operating JunctionTemperature Range		Tjw		-40 to +125	℃
Storage Temperature Range		Tstg		-40 to +125	℃
Isoration Voltage		Viso	Base Plate to Terminals, AC1min	2500	V
Mounting torque	Case mounting	Ftor	M6 Screw	2.4 to 3.5	N•m
	Terminals		M5 Screw	2.4 to 2.8	

Value per 1 Arm

Electrical • Thermal Characteristics


Characteristics	Symbol	Test Conditions		Maximum Value.			Unit
				Min.	Typ.	Max.	
Peak Off-State Current	I_{DM}	V_{DM}= V_{DRM}, Tj=125℃				20	mA
Peak On-State Voltage	V_{TM}	I_{TM}= 90A, Tj=25℃				1.50	V
Gate Current to Trigger	I_{GT}	V_D=6V,I_T=1A	Tj=-40℃			200	mA
			Tj=25℃			100	
			Tj=125℃			50	
Gate Voltage to Trigger	V_{GT}	V_D=6V,I_T=1A	Tj=-40℃			4	V
			Tj=25℃			2.5	
			Tj=125℃			2	
Gate Non-Trigger Voltage	V_{GD}	V_D=2/3V_{DRM} Tj=125℃		0.25			V
Critical Rate of Rise of Off-State Voltage	dv/dt	V_D=2/3V_{DRM} Tj=125℃		500			V/μs
Turn-Off Time	tq	I_{TM}=I_O,V_D=2/3V_{DRM} dv/dt=20V/μs, V_R=100V -di/dt=20A/μs, Tj=125℃			100		μs
Turn-On Time	tgt	Tj=25℃, I_{TM}=$I_{T(RMS)}$ V_D=100V, I_G=200mA di_G/dt=0.2A/μs			6		μs
Delay Time	td				2		μs
Rise Time	tr				4		μs
Latching Current	I_L	Tj=25℃			100		mA
Holding Current	I_H	Tj=25℃			50		
Thermal Resistance *1	Rth(j-c)	Junction to Case				0.35	℃/W
	Rth(c-f)	Base Plate to Heat Sink with Thermal Compound				0.1	


Value Per 1Arm

*1: Value Per Module


Nihon Inter Electronics Corporation

PAT/PAH301x OUTLINE DRAWING (Dimensions in mm)

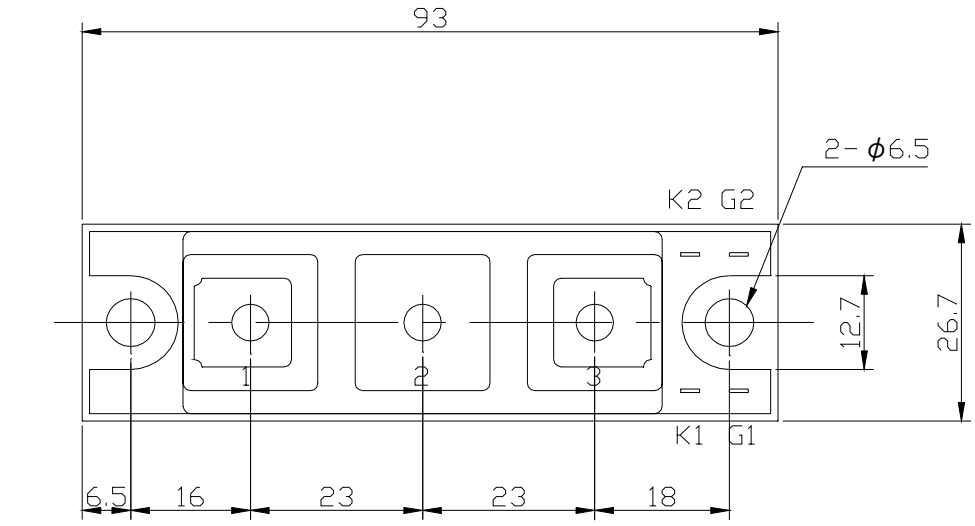


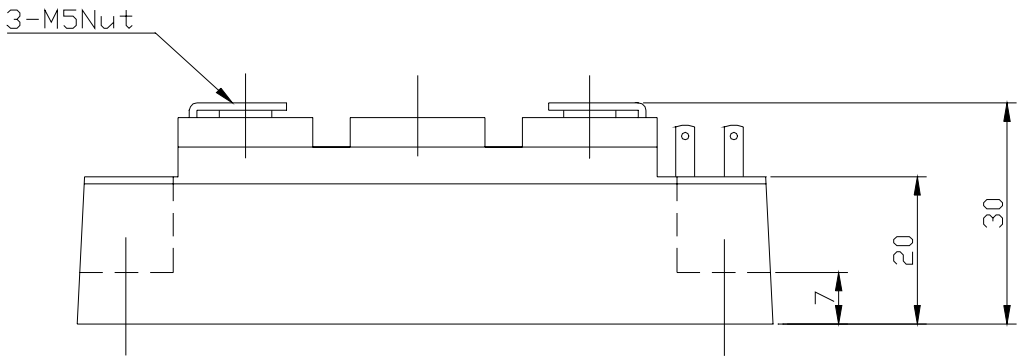


PAT

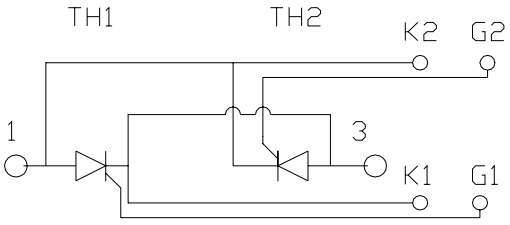


PAH

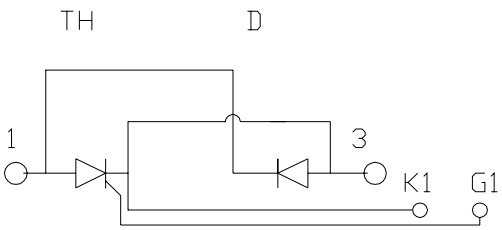


オン電圧特性
ON-STATE CURRENT VS. VOLTAGE

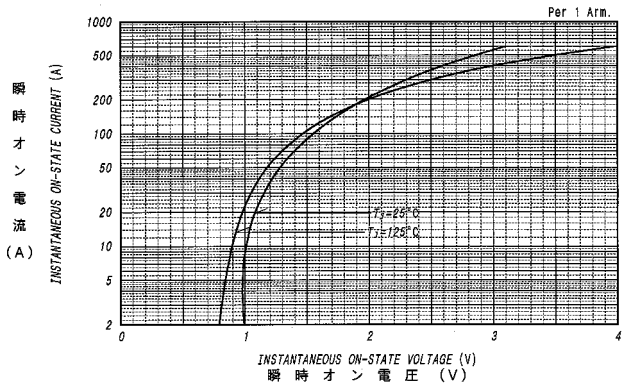


サージオン電流定格
SURGE CURRENT RATINGS

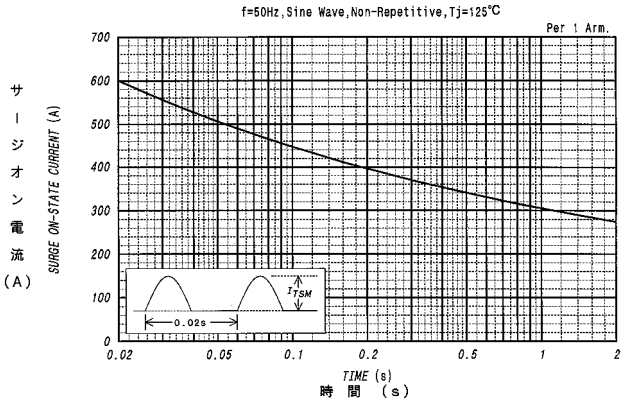


平均オン電力損失特性
AVERAGE ON-STATE POWER DISSIPATION

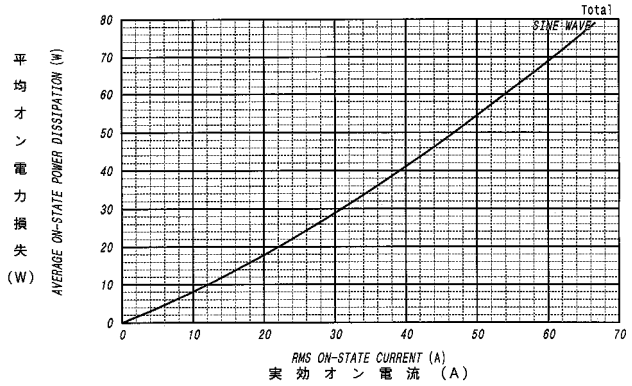

実効オン電流－ケース温度定格
RMS ON-STATE CURRENT VS. CASE TEMPERATURE

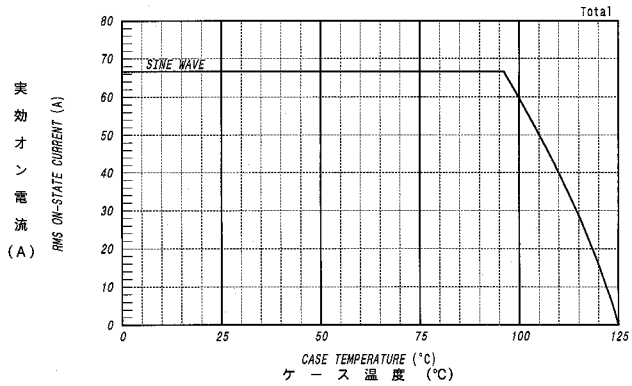

ゲート特性
GATE CHARACTERISTCS

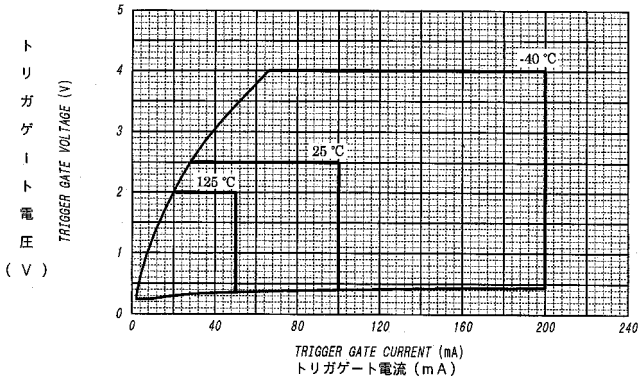

ゲート定格
GATE RATINGS

