




POSICHRON® position sensor
Only 12 mm height and 43 mm width

- Protection class up to IP67/IP69K
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Ultra flat profile housing: only 12 mm high
- Easy installation with mounting brackets
- Contactless
- Absolutely wear free and maintenance-free
- Analog output



Specifications	Output	Voltage Current
	Resolution	Refer to output specification
	Sampling rate	Up to 1 kHz, depending on the measurement range
	Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm
	Repeatability	±3 µm
	Housing material	AlMgSi1 / Zn / V4A
	Protection class	IP67 (optional IP67/IP69K; connector version: with mating connector only)
	Shock	EN 60068-2-27:2010, 50 g 11 ms, 100 shocks
	Vibration	EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles
	Connection	4 pin socket M8 / cable 2 m
	EMC, temperature	Refer to output specification

Order code PCFP24
1 channel

PCFP24 - [] - [] - [] - [] - []

Model name

Measurement range (in mm)

100 ... 5750 (in 10 mm increments)
other lengths upon request

Output

U1 = 0 ... 10 V signal conditioner
U1/H = U1 with Alarm_HOLD (see page 10)
U2 = 0.5 ... 10 V signal conditioner
U2/U; U2/H = U2 with Alarm_LOW; U2 with Alarm_HOLD (see page 10)
U8 = 0.5 ... 4.5 V signal conditioner
U8/U; U8/H = U8 with Alarm_LOW; U8 with Alarm_HOLD (see page 10)
I1 = 4 ... 20 mA signal conditioner (3 wire)
I1/U; I1/H = I1 with Alarm_LOW; I1 with Alarm_HOLD (see page 10)

Function and characteristics output

P1A = Position Magnet 1, increasing
P1D = Position Magnet 1, decreasing
PMU = Start value, direction & end value adjustable by the customer

Linearity

L02 / L02MM / L10 (for definition see "Specifications" above)

Connection

M8 = Connector M8, 4 pin
KAB2M = Cable, standard length 2 m, other lengths upon request

Order code mounting set (see page 7)

PCFP24-BFS1

Order Code PCFP24

**2 channel,
configurable**

Model name

Measurement range (in mm)

100 ... 5750 (in 10 mm increments)

other lengths upon request

Output

U1 = 0 ... 10 V signal conditioner

U1/H = U1 with Alarm_HOLD (see page 10)

U2 = 0.5 ... 10 V signal conditioner

U2/U; U2/H = U2 with Alarm_LOW; U2 with Alarm_HOLD (see page 10)

U8 = 0.5 ... 4.5 V signal conditioner

U8/U; U8/H = U8 with Alarm_LOW; U8 with Alarm_HOLD (see page 10)

I1 = 4 ... 20 mA signal conditioner (3 wire)

I1/U; I1/H = I1 with Alarm_LOW; I1 with Alarm_HOLD (see page 10)

Function and characteristics output 1

P1A = Position magnet 1, increasing

P1D = Position magnet 1, decreasing

DA = Difference magnet 1/2, increasing (2 magnets required)

DD = Difference magnet 1/2, decreasing (2 magnets required)

Function and characteristics output 2

P2A = Position magnet 2, increasing

P2D = Position magnet 2, decreasing

DA = Difference magnet 1/2, increasing

DD = Difference magnet 1/2, decreasing

2 magnets required

VZx.x = Velocity with direction detection (with 1 magnet only)

VZx.x = Velocity in steps of 0.1 m/s

Example: VZ1.5 towards start position

towards end position

-1.5 m/s

0

+1.5 m/s

Output U2: 0.5 V

5.25 V

10 V

Output I1: 4 mA

12 mA

20 mA

VAx.x = Velocity without direction detection (with 1 magnet only)

VAx.x = Velocity in steps of 0.1 m/s

Example: VA1.5 towards start position

towards end position

-1.5 m/s

0

+1.5 m/s

Output U2: 10 V

0.5 V

10 V

Output I1: 20 mA

4 mA

20 mA

Linearity

L02 / L02MM / L10 (for definition see "Specifications" above)

Connection

KAB2M = Cable, standard length 2 m, other lengths upon request

1. Order example: PCFP24 - 1000 - I1 - P1A - P2D - L10 - KAB2M

Flat profile, measurement range 1000 mm, 2 current outputs 4 ... 20 mA (I1)

Output 1: Position magnet 1, increasing signal (P1A)

Output 2: Position magnet 2, decreasing signal (P2D)

2. Order example: PCFP24 - 1000 - U2 - P1A - VZ1.0 - L10 - KAB2M

Flat profile, measurement range 1000 mm, 2 voltage outputs 0.5 ... 10 V (U2)

Output 1: Position magnet 1, increasing signal (P1A)

Output 2: Velocity magnet 1, -1 m/s ... 1 m/s for range 0.5 ... 10 V (VZ1.0)

Order code position magnet (see page 7)

PCMAG5


Order code mating connecting cable (see page 14)

KAB-...M-M8/4F/G-LITZE



POSICHRON® position sensor
Only 12 mm height and 43 mm width

- Protection class up to IP67/IP69K
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Ultra flat profile housing: only 12 mm high
- Easy installation with mounting brackets
- Contactless
- Absolutely wear free and maintenance-free
- Synchronous serial interface (SSI)



Specifications

Output	Synchronous serial (SSI)
Resolution	5, 10, 20, 50, 100 µm
Sampling rate	Up to 1 kHz, depending on the measurement range
Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm
Repeatability	±3 µm
Housing material	AlMgSi1 / Zn / V4A
Protection class	IP67 (optional IP67/IP69K; connector version: with mating connector only)
Shock	EN 60068-2-27:2010, 50 g 11 ms, 100 shocks
Vibration	EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles
Connection	Cable 2 m
EMC, temperature	Refer to output specification

Order Code PCFP24

PCFP24 - [] - [] - [/] [/] - [] - []

Model name

Measurement range (in mm)

100 ... 5750 (in 10 mm increments)
other lengths upon request

Resolution (in µm)

5 / 10 / 20 / 50 / 100

Output

SSI = Synchronous serial interface

Code

G / D = Gray / Dual

Number of data bits

24 / 25

Linearity

L02 / L02MM / L10 (for definition see "Specifications" above)

Connection

KAB2M = Cable, standard length 2 m, other lengths upon request

Order code mounting set (see page 7)

PCFP24-BFS1

Order code position magnet (see page 7)


PCMAG5

Order example: PCFP24 - 2000 - 5 - SSI/G/24 - L02 - KAB2M



POSICHRON® position sensor with only 12 mm height and 43 mm width

- Protection class up to IP67/IP69K
- Measurement range 0 ... 100 to 0 ... 5750 mm
- Absolute position measurement
- Ultra flat profile housing: only 12 mm high
- Easy installation with mounting brackets
- Contactless
- Absolutely wear free and maintenance-free
- CANopen bus or CAN SAE J1939 output
- Redundant version: combination of 2 sensors side by side



Specifications	Output	CANopen bus; CAN SAE J1939
	Resolution	50 µm
	Sampling rate	Up to 1 kHz, depending on the measurement range
	Linearity	Ranges >500 mm: L10 = ±0.10 % f.s. L02 = ±0.02 % f.s. Ranges ≤500 mm: L10 = ±0.5 mm L02MM = ±0.2 mm
	Repeatability	±3 µm
	Housing material	AlMgSi1 / Zn / V4A
	Protection class	IP67 (optional IP67/IP69K; connector version: with mating connector only)
	Shock	EN 60068-2-27:2010, 50 g 11 ms, 100 shocks
	Vibration	EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles
	Connection	Cable 0,3 m with 5-pin connector M12
	EMC, temperature	Refer to output specification

Order Code PCFP24

PCFP24 - [] - [] - [] - []

Model name

Measurement range (in mm)

100 ... 5750 (in 10 mm increments)
other lengths upon request

Output

CANOP = CANopen bus
CANOP/R = CANopen-Bus with integrated terminating resistance
CANJ1939 = CAN SAE J1939

Linearity

L02 / L02MM / L10 (for definition see "Specifications" above)

Connection

KAB0,3M-M12/CAN = Cable (length 0.3 m) with 5-pin M12 connector

Order code mounting set (see page 7)

PCFP24-BFS1


Order code position magnet (see page 7)

PCMAG5

Order code bus cable (see page 14)


KAB-...M-M12/5F/G-M12/5M/G - CAN

Order example: PCFP24 - 1000 - CANOP - L10 - KAB0,3M-M12/CAN

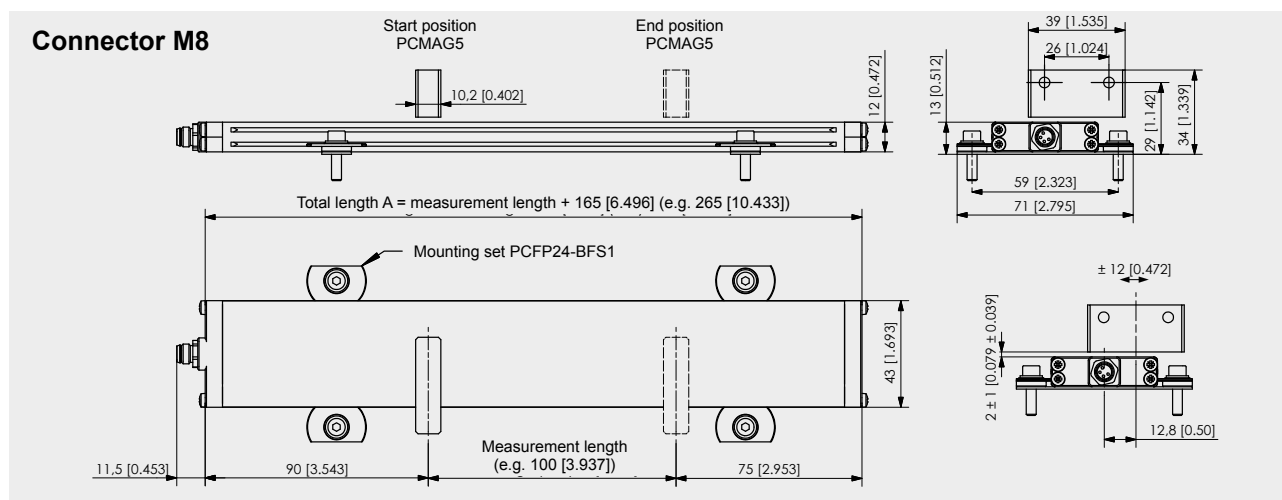

Dimensions in mm [inch]

Dimensions informative only. For guaranteed dimensions consult factory.

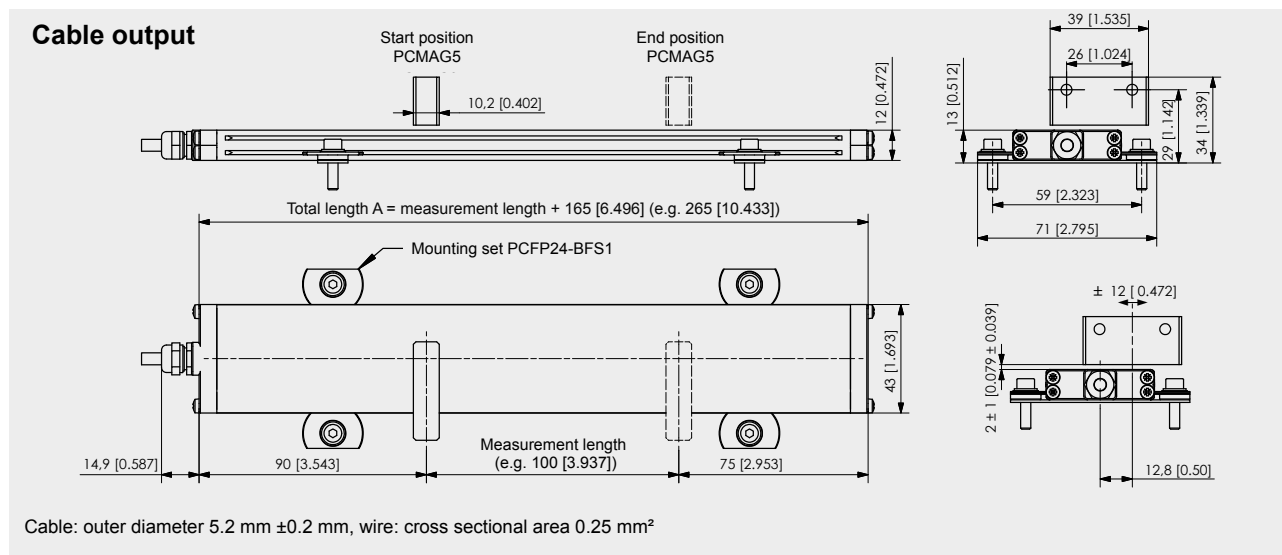


Dimensions in mm [inch]

Dimensions informative only. For guaranteed dimensions consult factory.

Option **-BFW**
Mounting brackets for
PCFP23


Note: The option -BFW can only be ordered with a new sensor, not separately!
Applicable for sensor lengths up to 1000 mm. Not combinable with PCFP23-BFS1.

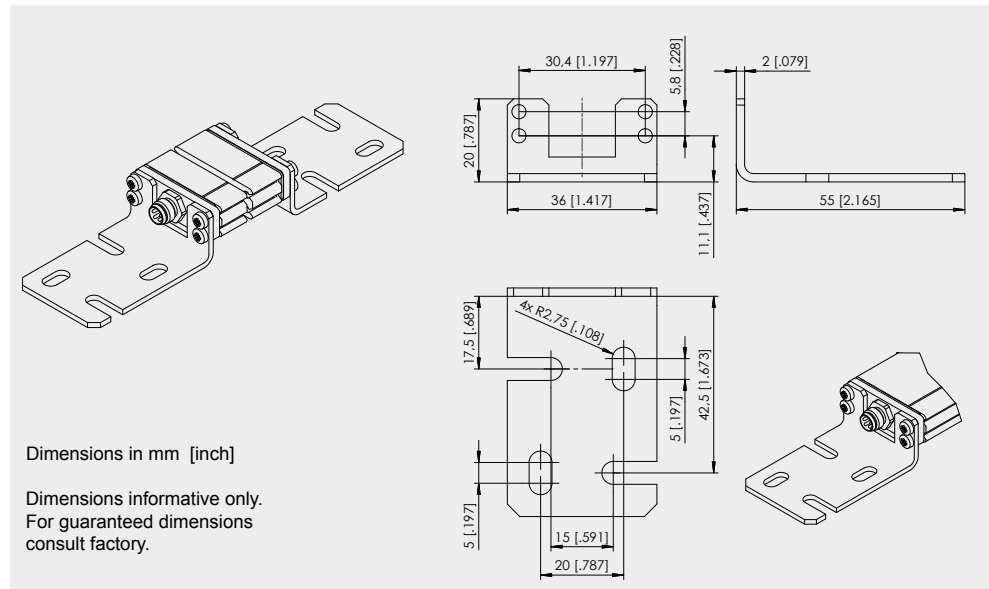

Order example: PCFP23 - 1000 - STSP - L02 - M8 - BFW

Option **-BFW**
Mounting brackets for
PCFP24

Note: The option -BFW can only be ordered with a new sensor, not separately!
Applicable for sensor lengths up to 1000 mm. Not combinable with PCFP24-BFS1.

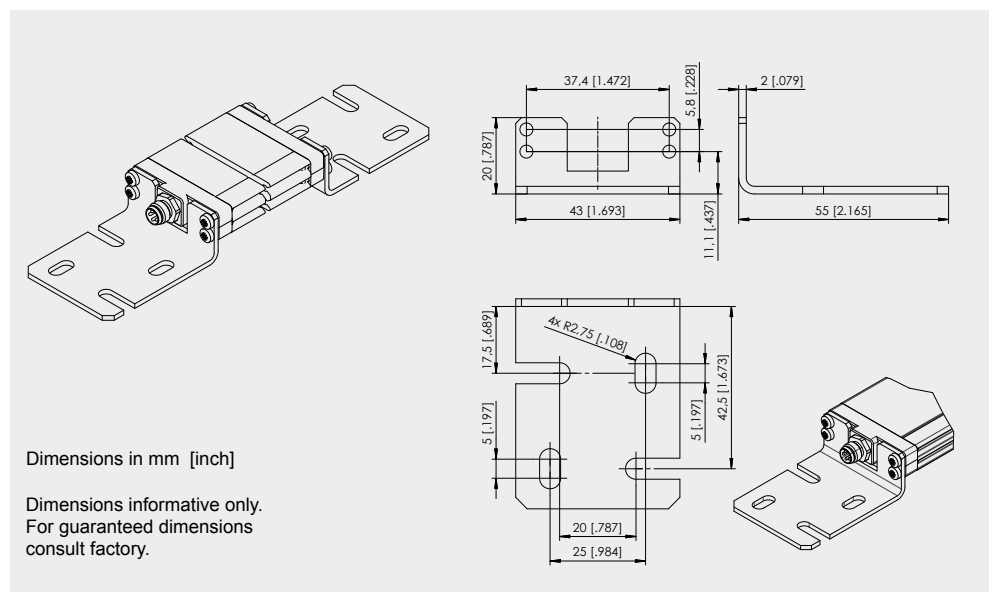



Order example: PCFP24 - 1000 - STSP - L02 - M8 - BFW

PCFP23-BFS1 and PCFP24-BFS1

Mounting set for PCFP23, PCFP24

PCMAG5

Standard magnet

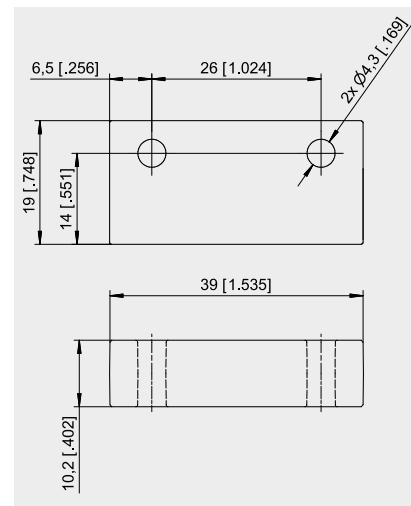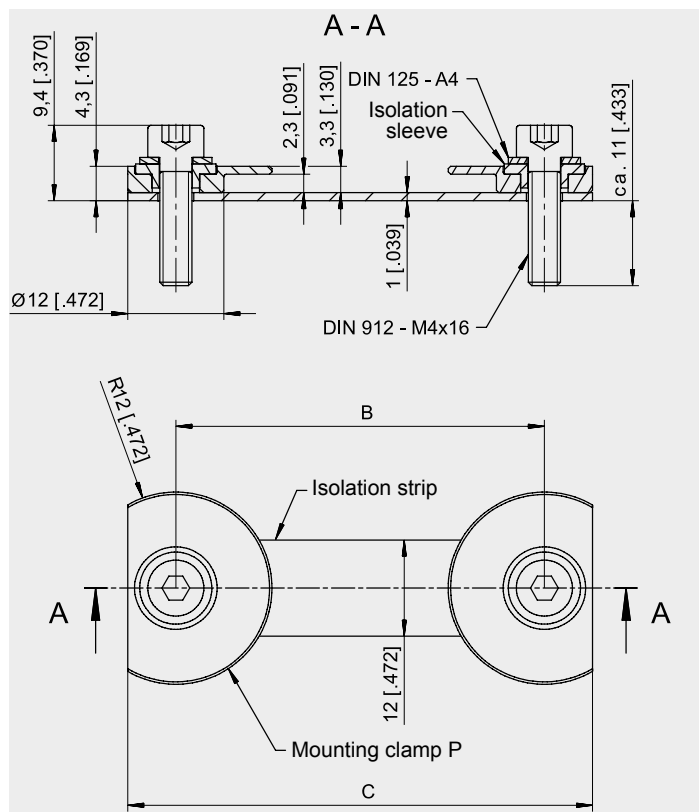

Dimensions in mm [inch]


Dimensions informative only.

For guaranteed dimensions consult factory.

Dimensions BFS1	POSICHRON Model	Dim. B [mm]	Dim. C [mm]
	PCFP23	52	64
	PCFP24	59	71

PCFP25-BFS1

Mounting set for
PCFP25

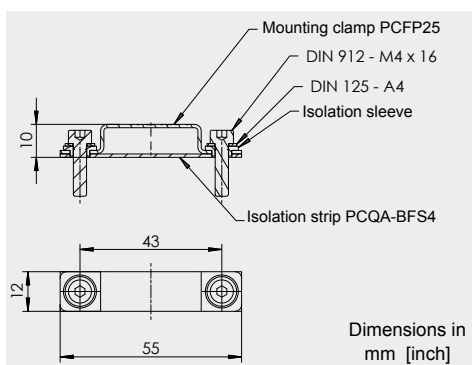


Dimensions in
mm [inch]

Output Specification U2, U8 and I1


Configurable, 1 or 2 channels

U1, U2, U8 Voltage output




Excitation voltage	U1: 18 ... 36 V DC; U2: 18 ... 36 V DC; U8: 10 ... 36 V
Excitation current	Typ. 35 mA, 80 mA max.
Output voltage	U1: 0 ... 10 V DC; U2: 0.5 ... 10 V DC; U8: 0.5 ... 4.5 V DC
Output current	2 mA max.
Output load	> 5 kΩ
Resolution	16 bit f.s., min. 10 μm
Stability (temperature)	±50 x 10 ⁻⁶ / °C f.s.
Protection	Reverse polarity, short circuit
Output noise	0.5 mV _{RMS}
Operating temperature	-40 ... +85 °C
EMC	EN 61326-1:2013

Signal diagram

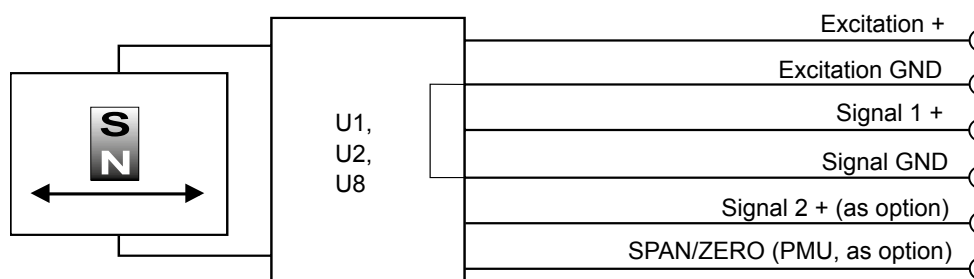


I1 Current output (3 wire)



Excitation voltage	18 ... 36 V DC (10 ... 36 V for R _L ≤ 250Ω)
Excitation current	Typ. 60 mA, 80 mA max.
Load resistor	350 Ω max.
Output current	4 ... 20 mA, 30 mA max (at failure)
Resolution	16 bit f.s., min. 10 μm
Stability (temperature)	±50 x 10 ⁻⁶ / °C f.s.
Protection	Reverse polarity, short circuit
Output noise	0.5 mV _{RMS}
Operating temperature	-40 ... +85 °C
EMC	EN 61326-1:2013

Signal diagram

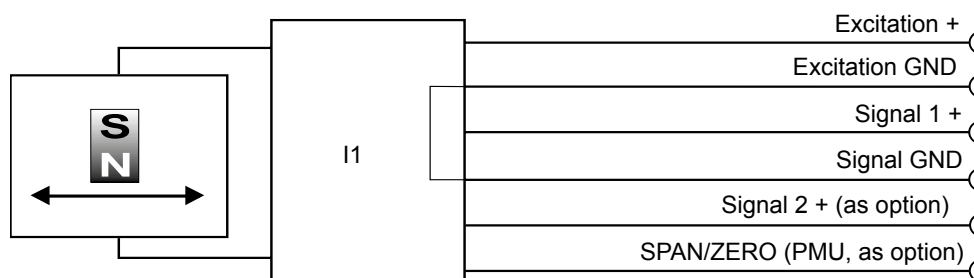


Connector M12, 8-pin

Signal wiring

Signal	Plug connection	Cable connection
Excitation +	1	white
Excitation GND	2	brown
Signal 1 +	3	green
Signal GND	4	yellow
Signal 2 + (optional*)	5	grey
SPAN/ZERO (PMU** only, optional)	6	pink

View to the
sensor connector




* When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely. ** Description page 10

Connector M12, 5-pin

Signal wiring

Signal	Plug connection
Excitation +	1
Signal 1 +	2
GND	3
Signal 2 + (optional*)	4
PMU** (optional)	5

View to the
sensor connector




* When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely. ** Description page 10

Connector M8, 4-pin

Signal wiring

Signal	Plug connection
Excitation +	1
Excitation GND	2
Signal +	3
PMU** (optional)	4

View to the
sensor connector



* When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely. ** Description page 10

Option - PMU for analog output U1, U2, U8 and I1

Programming of the start and end value by the customer:

The option PMU allows to program the start value and the end value of the output range by a programming signal SPAN/ZERO available at the connector. This Signal SPAN/ZERO must be connected with GND via a push button, then position magnet of the sensor must be moved to the start resp. end position. Pushing the button between 2 and 4 seconds sets the actual position as start position, pushing the button more than 5 seconds sets the actual position as end position. The values will be stored and are available after switching off the sensor.

To reset the sensor to the factory values the button must be pushed for longer than two seconds when the sensor is switched on.

Diagnostic on analog outputs

Behaviour of the analog signal output in case of error

In case of error (magnet missing or outside the measuring range) the analog output signal will assume a state according to the following options:

Alarm_HIGH

The output voltage resp. the output current is at HIGH level (overrange).

Alarm_LOW

The output voltage resp. the output current is at LOW level (underrange).

Alarm_HOLD


The output voltage resp. the output current will keep the last valid state.

	Alarm_HIGH (standard)	Alarm_LOW (.../U)	Alarm_HOLD (.../H)
U1	$U_{out} \geq 10,5 \text{ V}$	—	keeps last valid state (Order code U1/H)
U2	$U_{out} \geq 10,5 \text{ V}$	$U_{out} < 0,25 \text{ V}$ (Order code U2/U)	keeps last valid state (Order code U2/H)
U8	$U_{out} \geq 10 \text{ V}$	$U_{out} < 0,25 \text{ V}$ (Order code U8/U)	keeps last valid state (Order code U8/H)
I1	$I_{out} \geq 21 \text{ mA}$	1,5 ... 2 mA (Order code I1/U)	keeps last valid state (Order code I1/H)

Error signal for SSI output

If the sensor cannot detect a magnet the position value will assume the maximum value (0xFFFFFFFF).

Synchronous serial interface SSI




Output	RS422
Excitation voltage	10 ... 36 V DC, residual ripple 10 mV _{SS}
Excitation current	Typ. 80 mA, 150 mA max.
Clock frequency	100 kHz ... 1 MHz
Code	Gray code, dual code
Resolution	≥ 5 μm
Delay between pulse trains	>25 μs
Stability (temperature)	±50 x 10 ⁻⁶ / °C f.s.
Operating temperature	-40 ... +85 °C
EMC	EN 61326-1:2013


Description

The data transmission takes place by means of the two signals CLOCK and DATA. The processing unit (PLC, microcomputer) sends pulse sequences which clock the data transmission at the required transfer rate. With the first falling edge of the pulse sequence the position of the sensor is recorded and stored. The following rising edges control the bit-by-bit transfer of the data word. After a delay time the next new position information can be transwitted.

Data format (Train of 26 pulses)

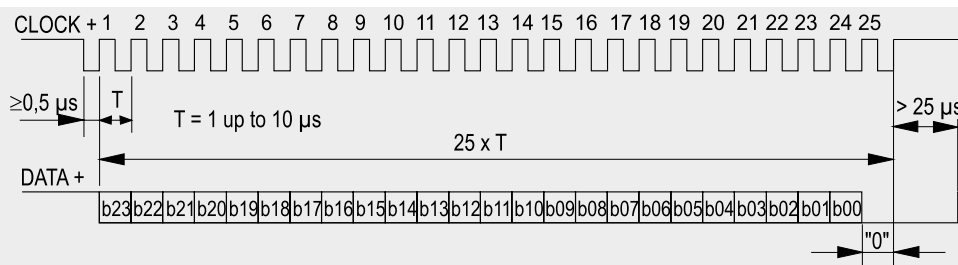

Signal diagram

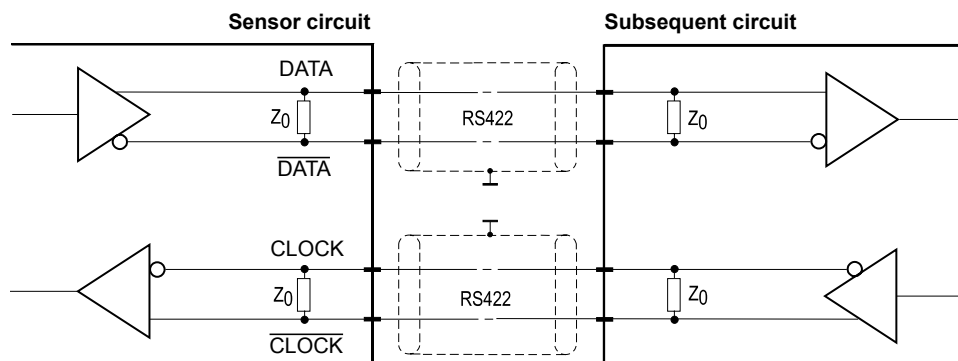

Cable length	Baud rate
50 m	100-1000 kHz
100 m	100-300 kHz

Note:
Extension of the cable length will reduce the maximum transmission rate.
The signals CLOCK/CLOCK and DATA/DATA must be connected in a twisted pair cable, common shielded.

Signal wiring

Signal	Plug connection	Cable connection
Excitation +	1	white
Excitation GND	2	brown
CLOCK	3	green
CLOCK	4	yellow
DATA	5	grey
DATA	6	pink

View to sensor connector




Error indication see page 10.

Description

CANopen interface with process data for position and cam functions, programmable are preset, resolution, filtering and cam switching points.

Interface CANOP



Communication profile	CANopen CiA 301 V 4.02, Slave
Encoder profile	Encoder CiA 406 V 3.2
Error Control	Node Guarding, Heartbeat, Emergency Message
Node ID	Adjustable via LSS or via object dictionary
PDO	4 TxPDO, 0 RxPDO, no linking, static mapping
PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
SDO	1 server, 0 client
CAM	8 cams
Certified	Yes
Transmission rates	50 kBaud to 1 MBaud, adjustable via LSS or via object dictionary
Nodes	127 max.
Bus connection	M12 connector, 5 pins
Integrated bus terminating resistor	120 Ω (option)
Bus, galvanic isolated	No

Specifications


Excitation voltage	18 ... 36 V DC
Excitation current	Typ. 20 mA for 24 V, max. 80 mA
Number of position magnets	1 ... 4
Resolution	50 μm
Measuring rate	1 kHz (asynchronous)
Stability (temperature)	±50 x 10 ⁻⁶ / °C f.s.
Repeatability	1 LSB
Operating temperature	-40 ... +85 °C
Protection	Reverse polarity, short circuit
Dielectric strength	500 V (V AC, 50 Hz, 1 min.)
EMC	EN 61326-1:2013


When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely.

Signal wiring


Signal	Plug connection
Shield	1
Excitation +	2
GND	3
CAN-H	4
CAN-L	5

View to sensor connector



Interface J1939 	CAN specification	ISO 11898, Basic and Full CAN 2.0 B	
	Transceiver	24V-compliant, not isolated	
	Communication profile	SAE J1939	
	Baud rate	250 kbit/s	
	Internal termination resistor	120 Ω (option)	
	Address	Default 247d, configurable	
NAME Fields	Arbitrary address capable	0	No
	Industry group	0	Global
	Vehicle system	7Fh (127d)	Non specific
	Vehicle system instance	0	
	Function	FFh (255d)	Non specific
	Function instance	0	
	ECU instance	0	
	Manufacturer	145h (325d)	Manufacturer ID
	Identity number	0nnn	Serial number 21 bit
Parameter Group Numbers (PGN)	Configuration data	PGN EF00h	Proprietary-A (PDU1 peer-to-peer)
	Process data	PGN FFnnh	Proprietary-B (PDU2 broadcast); nn Group Extension (PS) configurable
Specifications	Excitation voltage	18 ... 36 V DC	
	Excitation current	Typ. 20 mA for 24 V, max. 80 mA	
	Measuring rate	1 kHz (asynchronous)	
	Stability (temperature)	±50 x 10 ⁻⁶ / °C f.s.	
	Repeatability	1 LSB	
	Operating temperature	-40 ... +85 °C	
	Protection	Reverse polarity, short circuit	
	Dielectric strength	500 V (V AC, 50 Hz, 1 min.)	
	EMC	EN 61326-1:2013	

When using multiple magnets the distance between two magnets must be min. 70 mm to identify the single magnets definitely.

Signal wiring	Signal	Plug connection	View to sensor connector 
	Shield	1	
	Excitation +	2	
	GND	3	
	CAN-H	4	
	CAN-L	5	

Connector cable
M8, 4-pin
shielded


The 4-lead shielded cable is supplied with a mating 4-pin 90° M8 connector at one end and 4 wires at the other end. Available lengths are 2, 5 and 10 m. Wire: cross sectional area 0.14 mm².

Order code:

KAB - XM - M8/4F/W - LITZE

IP69K: KAB - XM - M8/4F/W/69K - LITZE

Length in m



Connector cable
M8, 4-pin
shielded


The 4-lead shielded cable is supplied with a mating 4-pin M8 connector at one end and 4 wires at the other end. Available lengths are 2, 5 and 10 m. Wire: cross sectional area 0.14 mm².

Order code:

KAB - XM - M8/4F/G - LITZE

IP69K: KAB - XM - M8/4F/G/69K - LITZE

Length in m

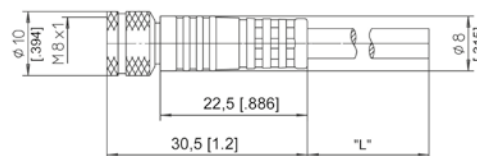

Signal wiring	Plug connection / Cable connection			
	1	2	3	4
M8, 4-pin	brown	white	blue	black

Connector/bus cable
M12, 5-pin
CAN bus
shielded


The 5-lead shielded cable is supplied with a female 5-pin M12 connector at one end and a male 5-pin M12 connector at the other end. Available lengths are 0.3 m, 2 m, 5 m and 10 m.

Order code:

KAB - XM - M12/5F/G - M12/5M/G - CAN

IP69K: KAB - XM - M12/5F/G/69K - M12/5M/G/69K - CAN


Length in m

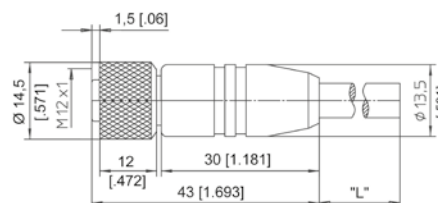

T-piece for bus cable
M12, 5-pin
CAN bus

Order code:

KAB - TCONN - M12/5M - 2M12/5F - CAN



Terminating
resistance
M12, 5-pin
CAN bus

Order code:

KAB - RTERM - M12/5M/G - CAN

