

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-11A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-11B: Brass, Nickel plated

PDSN-11C: Brass, Nickel plated

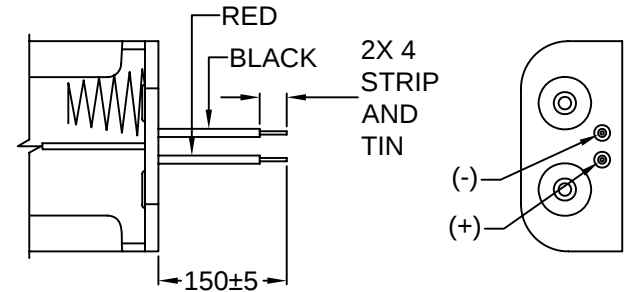

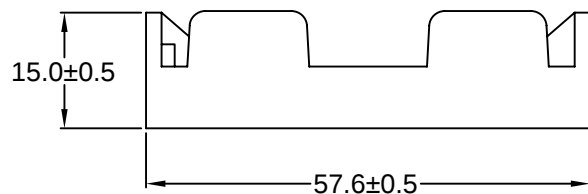
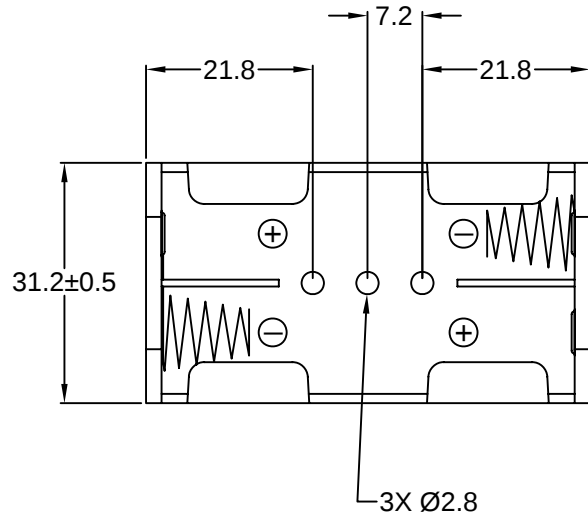
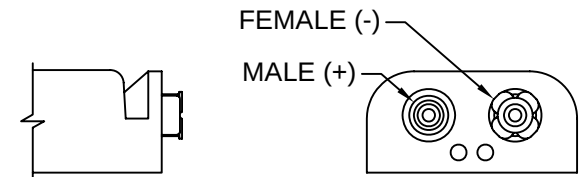
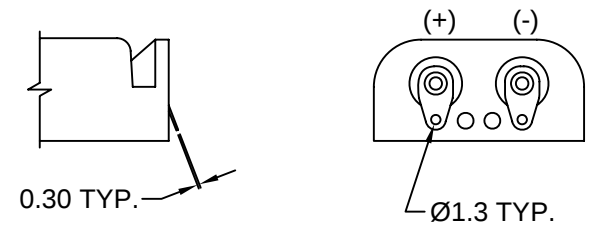
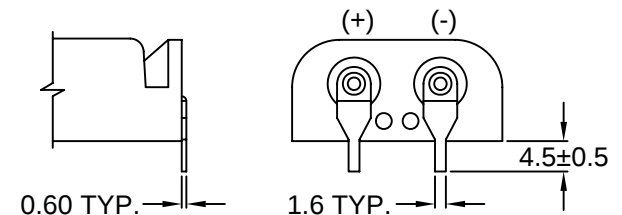
PDSN-11D: Steel, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in
Polypropylene

ENVIRONMENTAL:

Operating temperature: -5°C to +83°C

**RoHS
COMPLIANT**

**PDSN-11A WIRE LEADS****PDSN-11B SNAP TERMINAL****PDSN-11C SOLDER LUGS****PDSN-11D PCB PINS****REVISIONS**

REV	DATE	CHANGE	CHNG	CHK	APPR
A	12/98	UPDATED FORMAT & SPECS	PB	TD	JJ
B	03/27/02	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	TM	DATE:	3/21/94
CHECK BY	JD	DATE:	3/22/94
APPR BY	SS	DATE:	3/22/94

Power Dynamics, Inc.

Phone: 973 560-0019 Whippary, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "AA" BATTERY HOLDER
SIDE BY SIDE

PART #:	PDSN-11X	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: B
SCALE:	NTS		