

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-18A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-18B: Brass, Nickel plated

PDSN-18C: Brass, Nickel plated

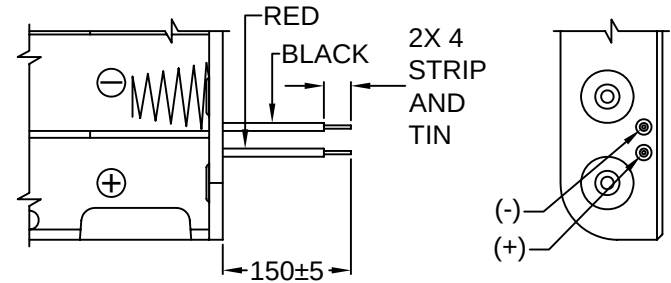
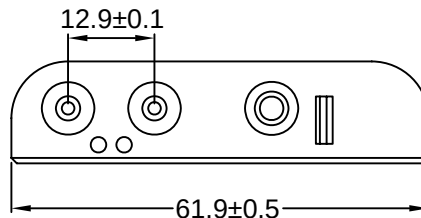

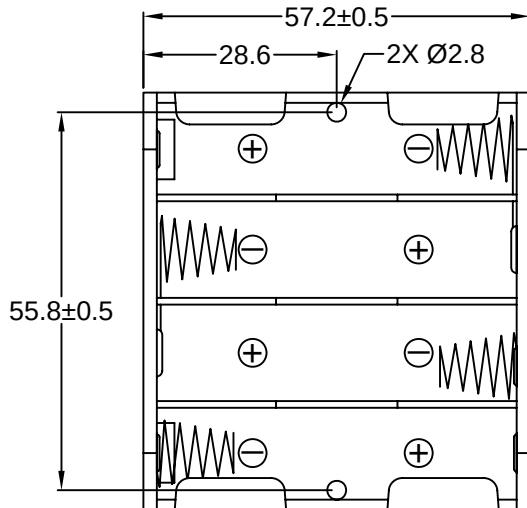
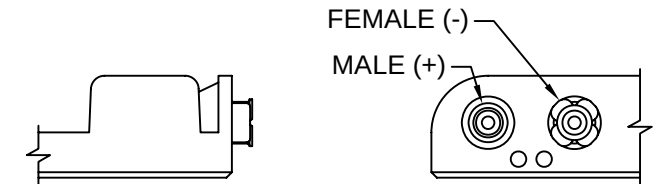
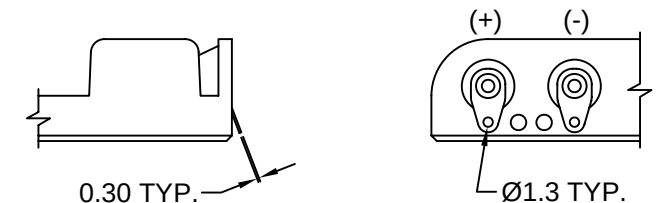
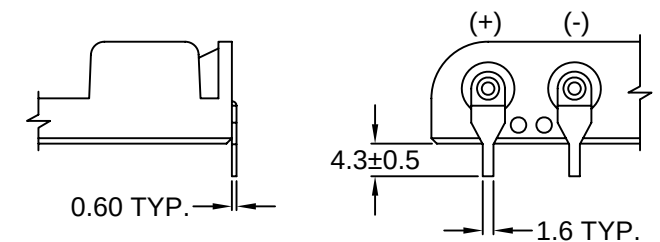
PDSN-18D: Steel, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in
Polypropylene

ENVIRONMENTAL:

Operating temperature: -5°C to +83°C

**RoHS
COMPLIANT**

**PDSN-18A WIRE LEADS****PDSN-18B SNAP TERMINAL****PDSN-18C SOLDER LUGS****PDSN-18D PCB PINS****REVISIONS**

REV	DATE	CHANGE	CHNG	CHK	APPR	KLH	SS	PB
A	3/25	MATERIAL CHANGE	TM					
B	1/11/99	ADD TOLERANCE	TD					
C	4/12/00	REVISED & UPDATE	TD					
D	04/02/02	REVISED / UPDATED	GQ					

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	TM	DATE:	3/21/94
CHECK BY	TD	DATE:	01/18/99
APPR BY	SS	DATE:	01/18/99

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "AA" BATTERY HOLDER
SIDE BY SIDE

PART #: **PDSN-18X**

SIZE: A ALL DIMENSIONS FOR REFERENCE ONLY
SCALE: NTS DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV: **D**