MATERIAL AND FINISH:
Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated
PDSN-24-1A (wire leads): PVC, 26 AWG
Contact & terminals:
PDSN-24-1B: Brass, Nickel plated
PDSN-24-1C: Brass, Nickel plated
Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:
Operating temperature: -5°C to +83°C

RoHS COMPLIANT

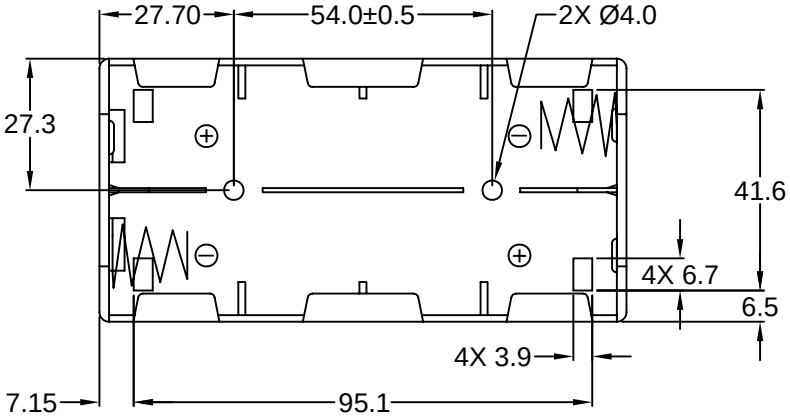

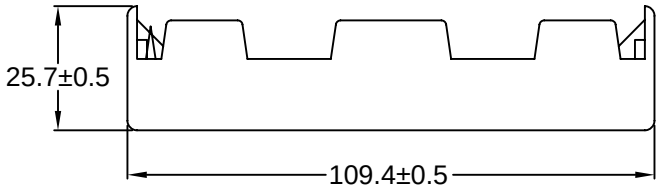



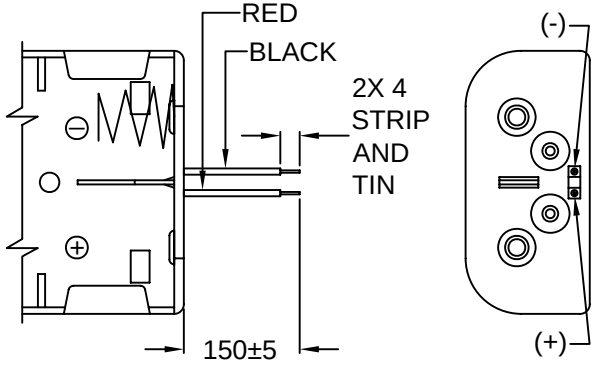

PDSN-24-1A WIRE LEADS

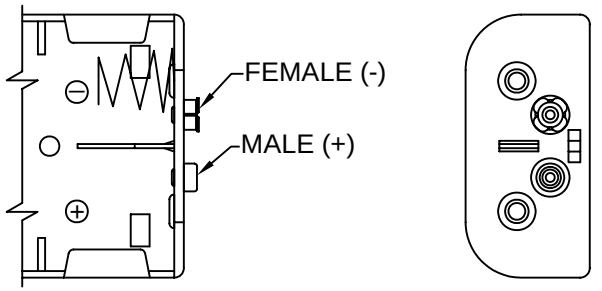

PDSN-24-1B SNAP TERMINAL

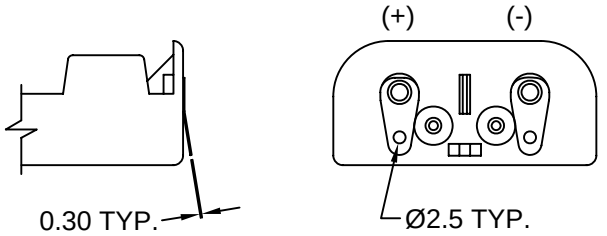

PDSN-24-1C SOLDER LUGS

REVISIONS				
REV	DATE	CHANGE	CHNG	CHCK	APPR
A	05/13/02	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	DT	DATE:	3/26/01
CHECK BY	PB	DATE:	3/25/01
APPR BY		DATE:	

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "C" BATTERY HOLDER

PART #: PDSN-24-1X

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A