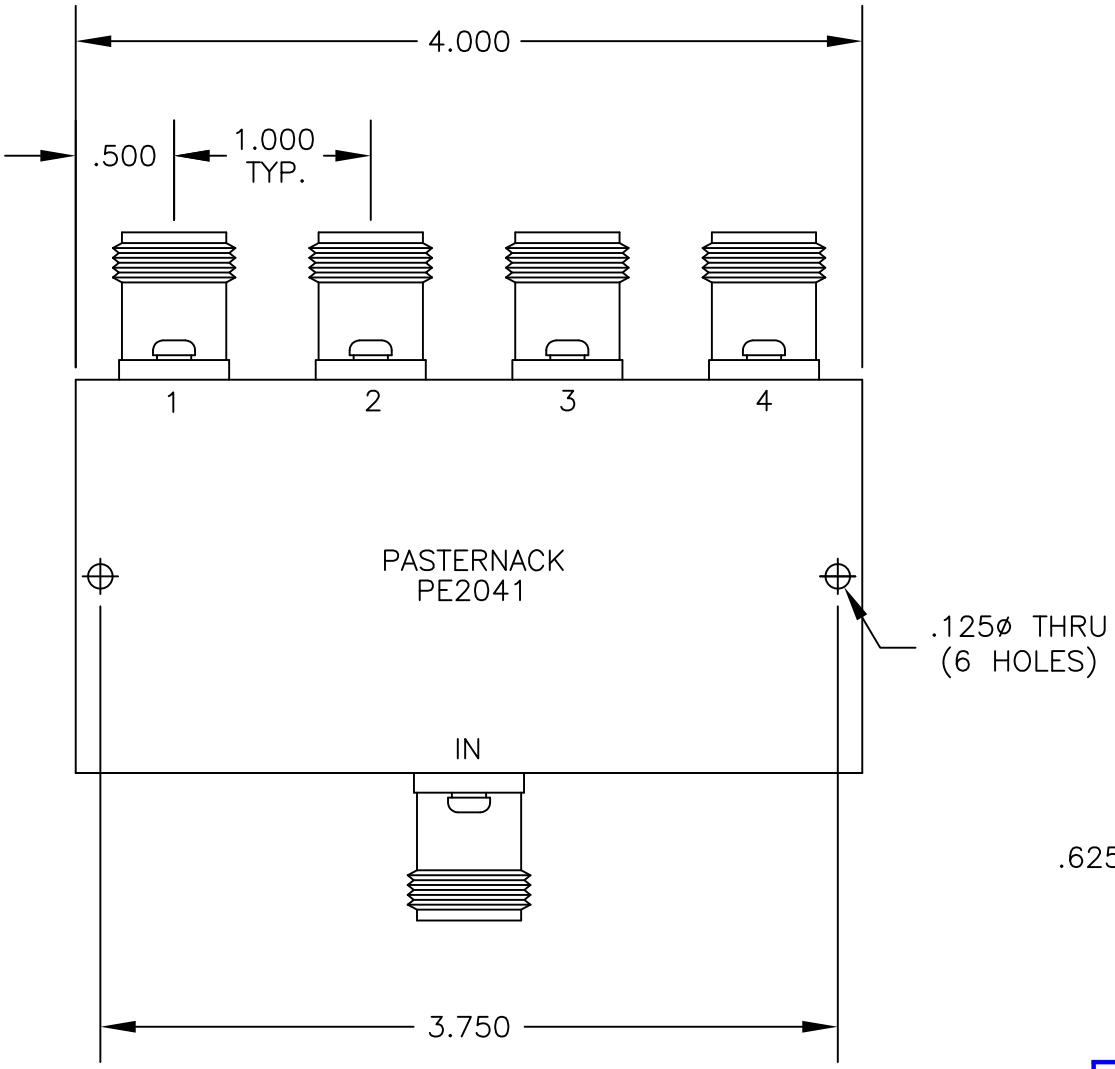

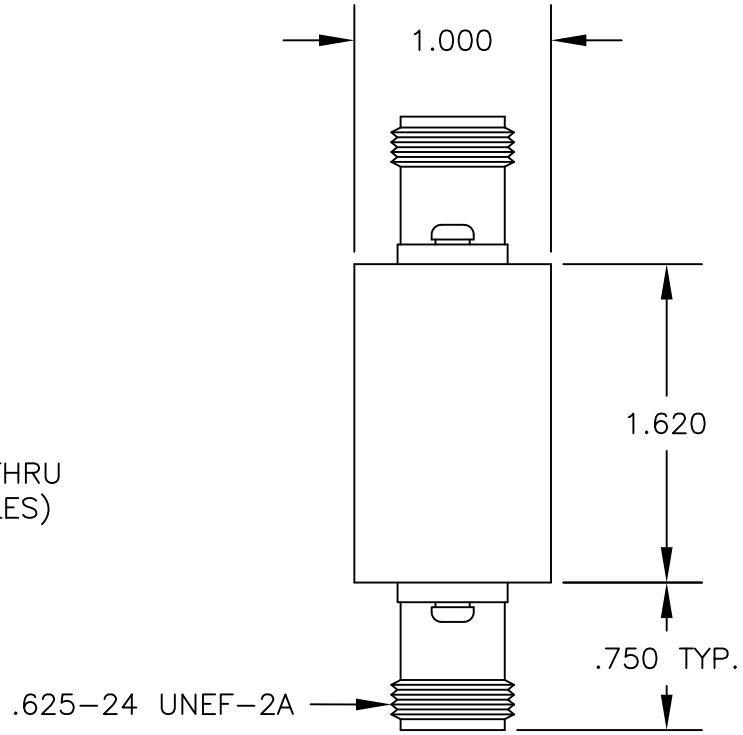

SPECIFICATIONS

FREQUENCY RANGE: 4 TO 8 GHz
NUMBER OF OUTPUT PORTS: 4
MINIMUM ISOLATION: 20 dB
MAXIMUM VSWR: 1.60
MAXIMUM INSERTION LOSS: 2.25 dB

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE	DES.
PE2041	N FEMALE POWER DIVIDER FREQUENCY RANGE: 4-8 GHz 4 OUTPUT PORTS

REV. A	FSCM NO. 53919	CAD FILE 101411	SCALE N/A	SIZE A	2231

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].