
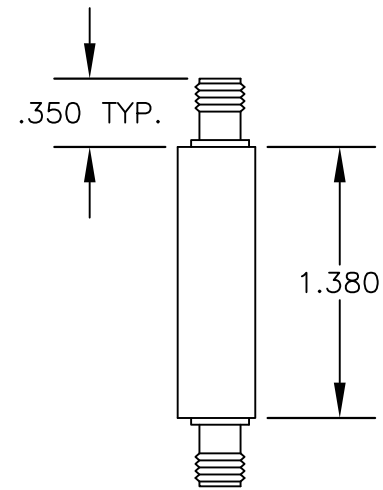


SPECIFICATIONS

IMPEDANCE	50 OHMS
FREQUENCY RANGE	.8 TO 2.5 GHz
NUMBER OF OUTPUT PORTS	2
MINIMUM ISOLATION	20 dB
INSERTION LOSS	.4 dB MAX.
VSWR	1.30:1 MAX.

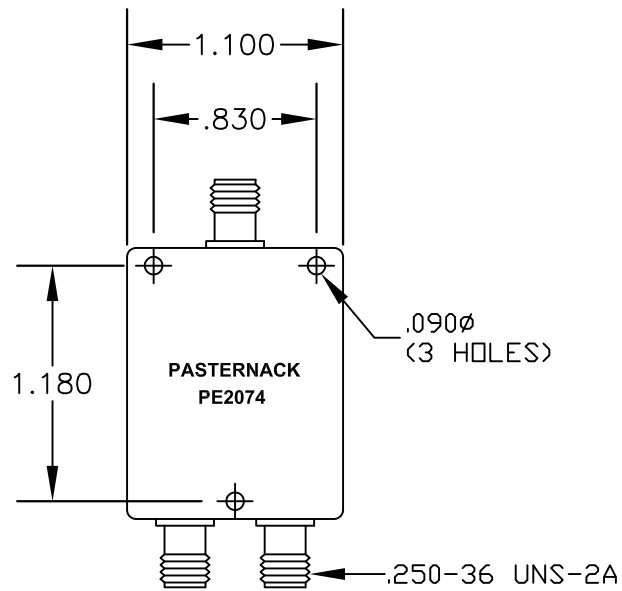

PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE

PE2074

DES.

SMA Female Power Divider, 2-Way,
800-2500MHz

REV. -

FSCM NO. 53919

CAD FILE 072409

SCALE N/A

SIZE A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.