
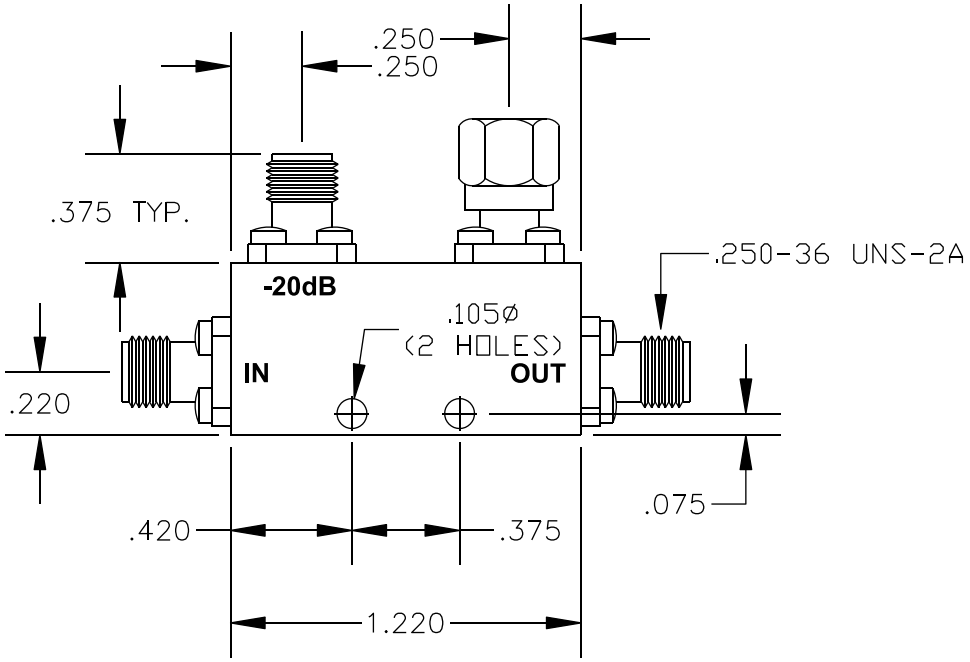


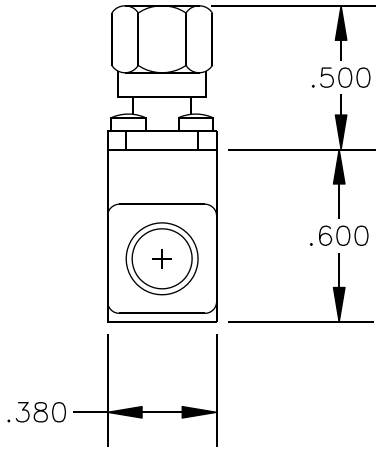

SPECIFICATIONS

FREQUENCY RANGE: 4.0–12.4 GHz
COUPLING (INCLUDES FREQUENCY SENSITIVITY): 20±1.00 dB
FREQUENCY SENSITIVITY: ±0.60 dB
INSERTION LOSS: (EXCLUDING COUPLED POWER) 0.50 dB (TRUE) 0.45 dB
DIRECTIVITY: 17 dB MINIMUM
PRIMARY LINE: 1.30 VSWR MAX.
SECONDARY LINE: 1.30 VSWR MAX.
AVG. INCIDENT: 50 WATTS POWER
AVG. REFLECTED: 50 WATTS POWER
PEAK: 3 KW POWER

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE	DES.
PE2211-20	SMA FEMALE DIRECTIONAL COUPLER BROADBAND FREQUENCY RANGE: 4.0-12.4 GHz

REV. A	FSCM NO. 53919	CAD FILE 092908	SCALE N/A	SIZE A	147

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.