


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| N MALE     | 50 OHM    |
| N FEMALE   | 50 OHM    |
| RG393/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

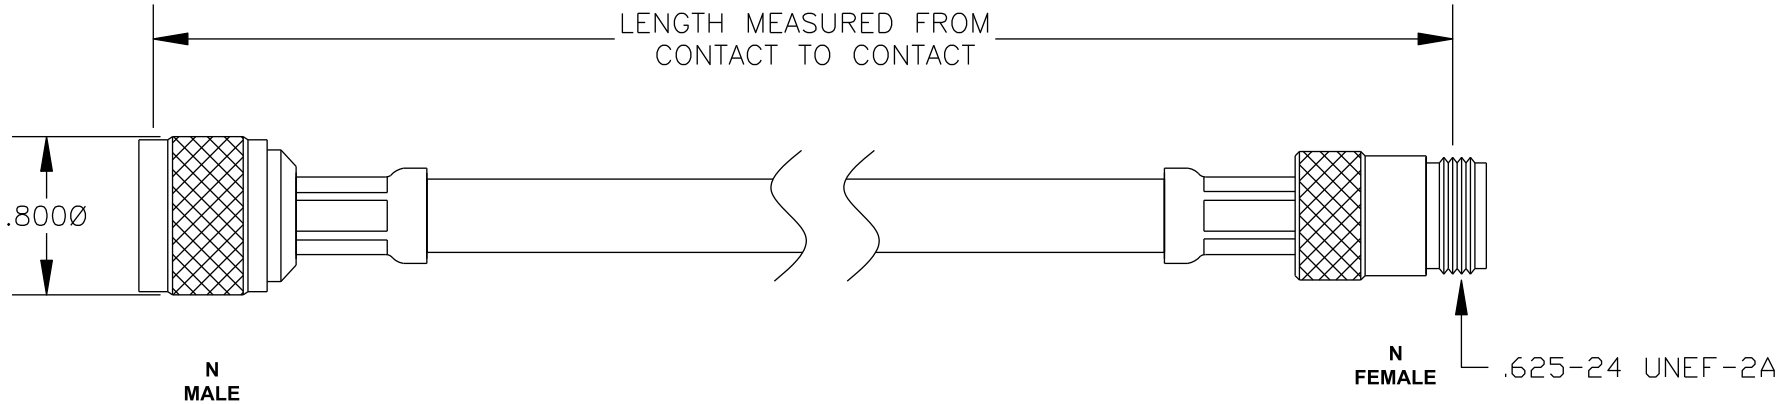

**PASTERNAK ENTERPRISES, INC.**  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
  
**COAXIAL & FIBER OPTICS**

DWG TITLE  
**PE3977-XX**

DES. CABLE ASSEMBLY, RG393/U, N MALE  
TO N FEMALE

|        |                |                 |           |            |
|--------|----------------|-----------------|-----------|------------|
| REV. A | FSCM NO. 53919 | CAD FILE 020108 | SCALE N/A | SIZE A 127 |
|--------|----------------|-----------------|-----------|------------|

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES.  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.