



75 Ohm F Male Right Angle Connector Twist Attachment For RG59, RG62

TECHNICAL DATA SHEET

PE44323

75 Ohm F Male Right Angle Connector Twist Attachment For RG59, RG62

Configuration

Connector	F Male
Connector Interface Type	RG59, RG62
Cable Attachment Method (Shield/Contact)	Twist
Body Style	Right Angle

Electrical Specifications

Impedance, Ohms	75
-----------------	----

Mechanical Specifications

Size

Length, in [mm]	1.42 [36.07]
Width/Dia., in [mm]	0.438 [11.13]
Height, in [mm]	1.06 [26.92]
Weight, lbs [g]	0.261 [118.39]

Connector

Type	F Male
Contact Material and Plating	Tin-Lead
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, in.	7/16
Torque, in-lbs [Nm]	15 [1.7]
Body Material and Plating	Brass, Nickel
Dielectric Type	Delrin

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------



75 Ohm F Male Right Angle Connector Twist Attachment For RG59, RG62 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male Right Angle Connector Twist Attachment For RG59, RG62 PE44323](http://www.pasternack.com/f-male-standard-rg59-rg62-connector-pe44323-p.aspx)

URL: <http://www.pasternack.com/f-male-standard-rg59-rg62-connector-pe44323-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	TIN LEAD
INSULATOR	DELTRIN

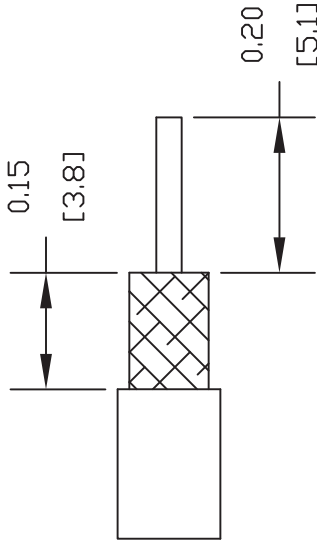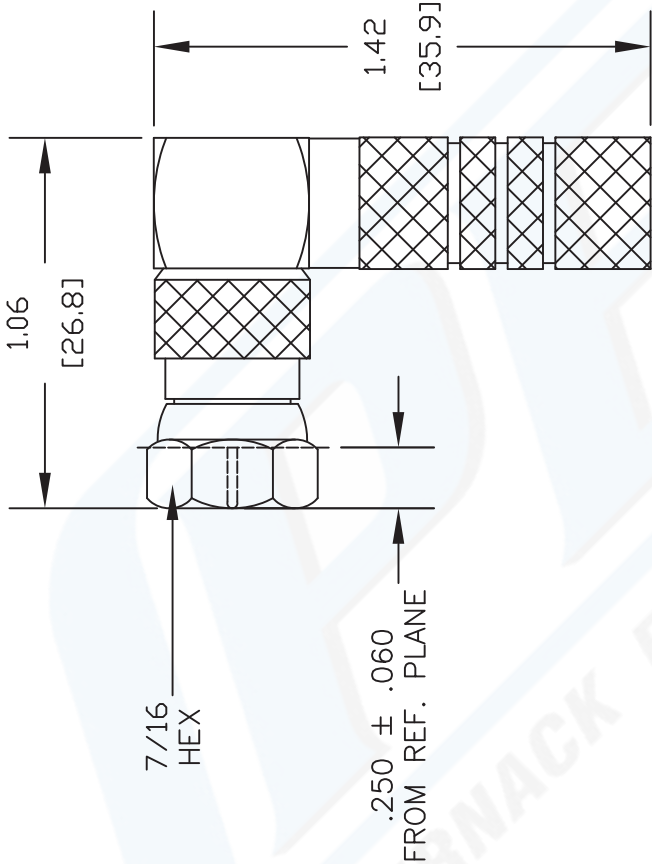

STRIPPING DIMENSIONS

ASSEMBLY PROCEDURES

1. STRIP CABLE AS SHOWN.
2. TWIST CONNECTOR OVER CABLE UNTIL IT STOPS.



PASTERNACK ENTERPRISES, INC.
 P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
 COAXIAL & FIBER OPTICS

DWG TITLE		DES.	F MALE RIGHT ANGLE TWIST ATTACHMENT FOR RG59 & RG62		
PE44323					
REV. A	FSCM NO. 53919	CAD FILE	040811	SCALE	N/A
				SIZE	A
					127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.