

MATERIALS	
CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HEAT SINK	ANODIZED ALUMINUM

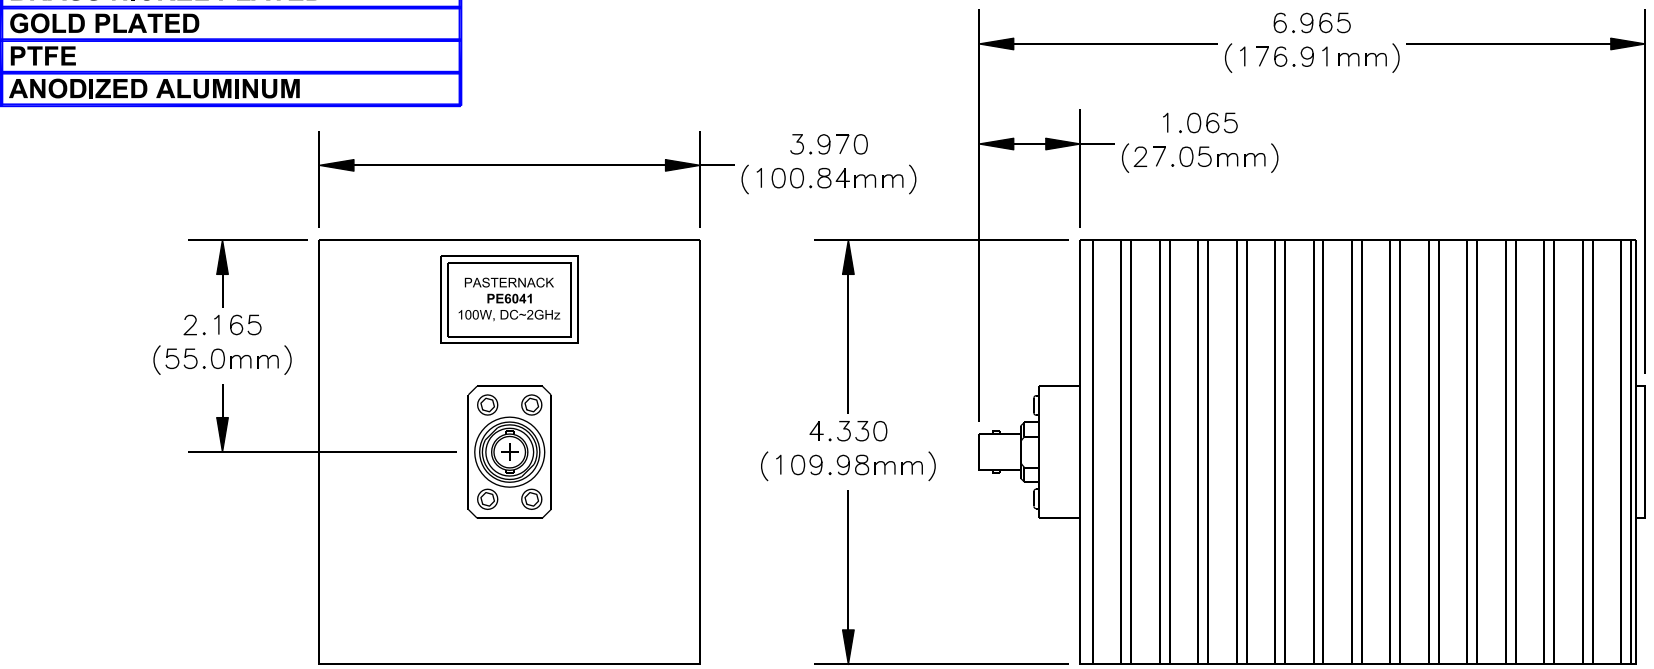

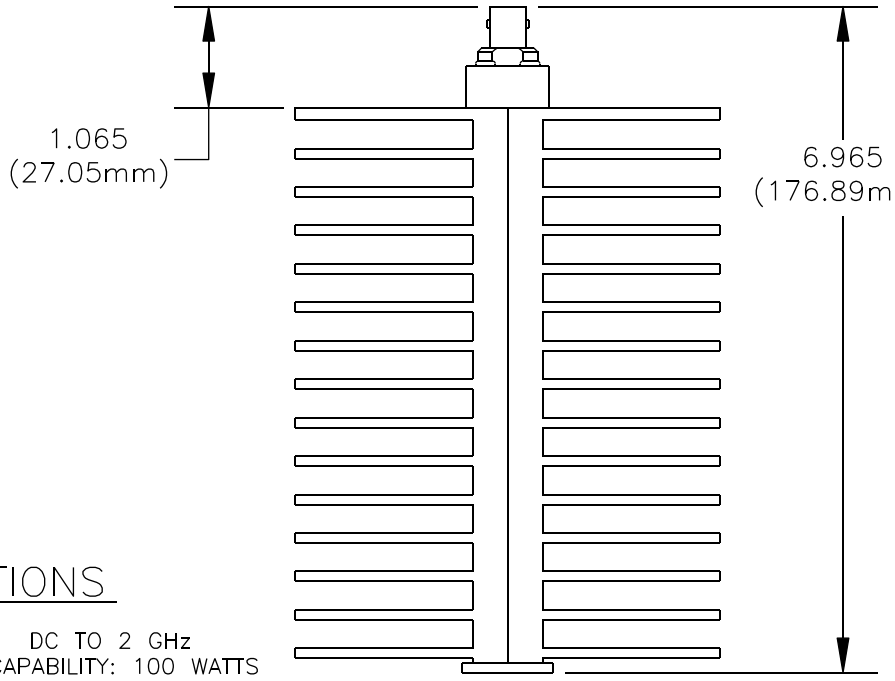

SPECIFICATIONS

FREQUENCY RANGE: DC TO 2 GHz
POWER HANDLING CAPABILITY: 100 WATTS
MAXIMUM VSWR: 1.25

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE
PE6041

DES. BNC FEMALE HIGH POWER TERMINATION
FREQUENCY RANGE: DC TO 2 GHz

REV. -	FSCM NO. 53919	CAD FILE 082808	SCALE N/A	SIZE A	127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.