


| COMPONENTS          | IMPEDANCE |
|---------------------|-----------|
| MINI ALLIGATOR CLIP | N/A       |
| MINI ALLIGATOR CLIP | N/A       |
|                     |           |
|                     |           |

| Standard Lengths |       |                         |                 |
|------------------|-------|-------------------------|-----------------|
| -6-B             | -6-R  | 6"                      | B= Black R= Red |
| -12-B            | -12-R | 12"                     |                 |
| -18-B            | -18-R | 18"                     |                 |
| -24-B            | -24-R | 24"                     |                 |
| -36-B            | -36-R | 36"                     |                 |
| -48-B            | -48-R | 48"                     |                 |
| -60-B            | -60-R | 60"                     |                 |
| -72-B            | -72-R | 72"                     |                 |
| -XX-B            | -XX-R | Custom Length in inches |                 |



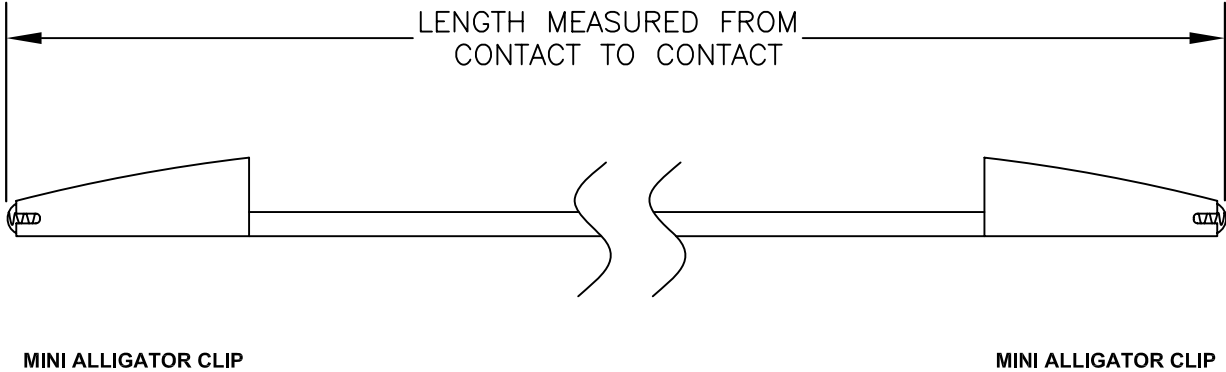

**PASTERNAK ENTERPRISES, INC.**  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

|                               |                |                                                                         |           |
|-------------------------------|----------------|-------------------------------------------------------------------------|-----------|
| DWG TITLE<br><b>PE9934-XX</b> |                | DES. SINGLE WIRE PATCH CORD, MINI ALLIGATOR CLIP TO MINI ALLIGATOR CLIP |           |
| SIZE A                        | FSCM NO. 53919 | CAD FILE 061807                                                         | SCALE N/A |

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.