
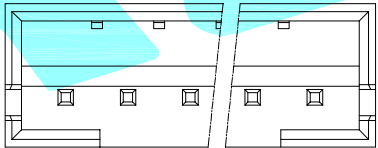
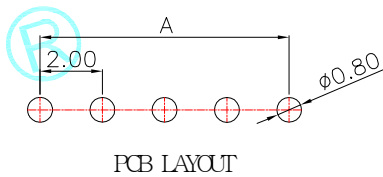
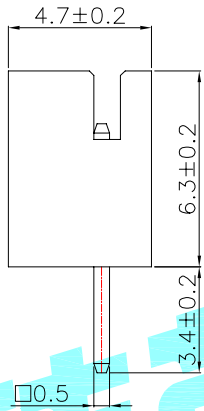


Poles	PART NO	DIM A	DIM B
2	PH-2A	2.0	6.1
3	PH-3A	4.0	8.1
4	PH-4A	6.0	10.1
5	PH-5A	8.0	12.1
6	PH-6A	10.0	14.1
7	PH-7A	12.0	16.1
8	PH-8A	14.0	18.1
9	PH-9A	16.0	20.1
10	PH-10A	18.0	22.1
11	PH-11A	20.0	24.1
12	PH-12A	22.0	26.1
13	PH-13A	24.0	28.1
14	PH-14A	26.0	30.1
15	PH-15A	28.0	32.1
16	PH-16A	30.0	34.1

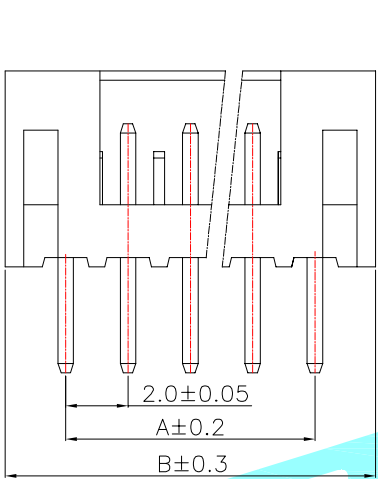

- 1.Pin pitch: 2.0
2.Rated voltage: 250V DC/AC
3.Contact resistance: ≤20mΩ
4.Insulation resistance: ≥1000MΩ
5.Operating temperature: -25°C~+85°C

②	PIN	—	—	Brass	Sn Plated	—	
①	Base	—	1	PA66	Natural	—	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS		DATE		HRC® ELECTRONICS CO.,LTD			
DRAWN	LIUCAN	2021.10.22					
CHECKED				TITLE:	Bar Connector Series		
APPROVALS				PART NO.	PH-nA		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'		DRAWING NO.	—		SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.