
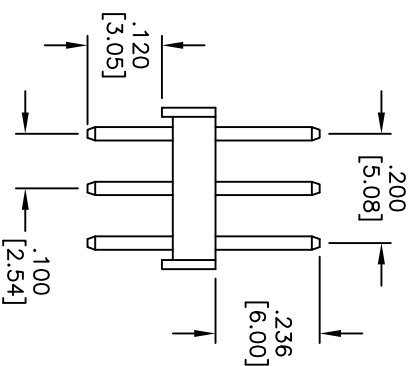
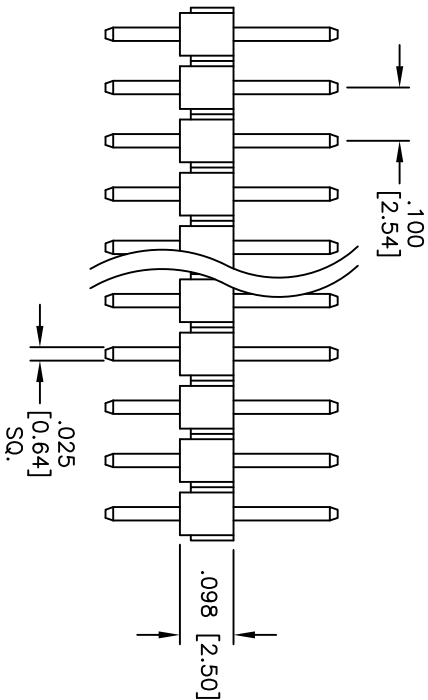
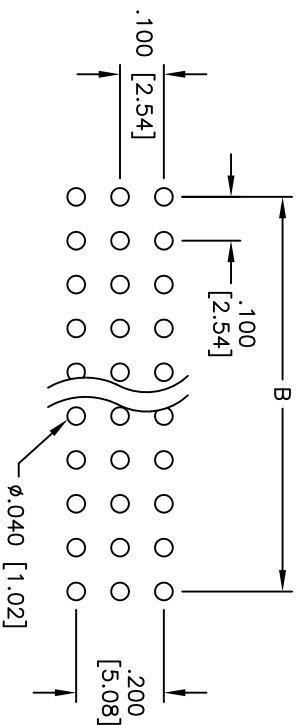


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/4/05	
A		UPDATED SPEC.	2/5/15	HR/NP

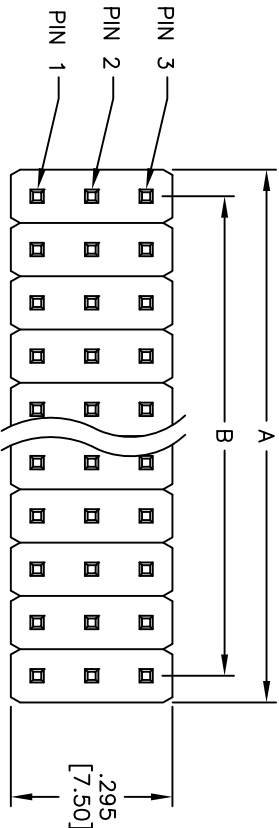

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 3 Amps max
Contact resistance: 20 mohms max @ DC 100 mA
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 6 thru 120
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH			
.X .XX .XXX	± .10 ± .020 ± .015	ØXX ØXX ØXXX	± .10 ± .015 ± .010	909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS			DATE	TITLE			
DRAWN	SS	4/4/05		.100 [2.54] TRIPLE ROW PIN HEADER			
CHECKED				GOLD PLATED			
APPROVED				SIZE	PART NO.	REV.	
				X	PH3-XX-UA	A	
REF:	S00059T	SCALE:	NTS	SHEET	1 OF 1		

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

RoHS
COMPLIANT