

Sales Outline Drawing


May not be suitable for all medical and aerospace applications.

Specifications: Contact Mallory Sonalert to discuss your application.

Oscillation Frequency (Hz)	2900 ± 500
Operating Voltage (Vdc)	22 ~ 28
Rated Voltage (Vdc)	24
Current Consumption (mA/max)	12 at Rated Voltage
Sound Pressure Level (dB/min)	90 at 30cm at Rated voltage
Tone/Pulse Rate (Hz)	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Housing	ABS 777D plastic resin (Color: Black)
Lead Wires	28 AWG RED & BLACK
Terminal	Molex Micro-Fit 3.0 PN: 43025 Mates with:43020-0201
Weight (Grams)	12.4
Options	For other options contact factory

Dimensions: (units: mm)

ROHS Compliant

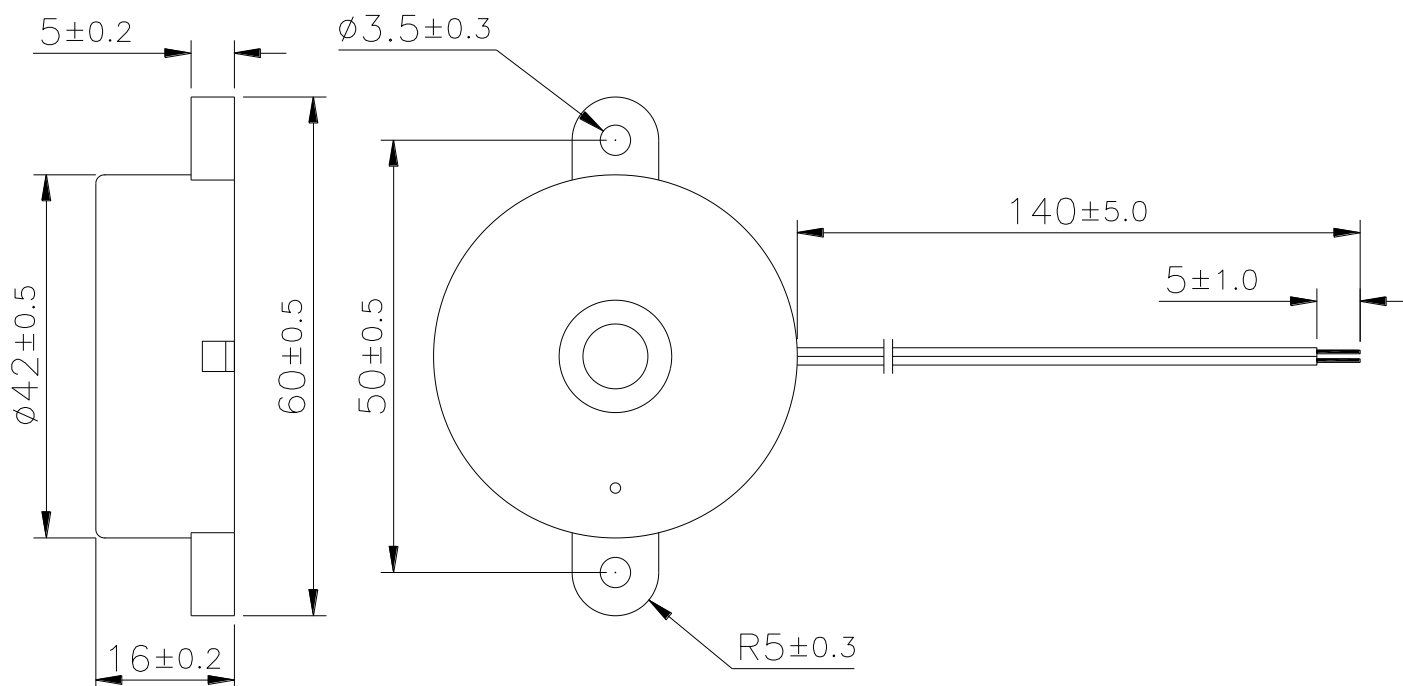

Connector:

