PIC GmbH • Nibelungenstr. 5A
90530 Wendelstein, Germany
Phone +49 911 99 59 06-0
Fax +49 911 99 59 06-99
info@pic-gmbh.com • www.pic-gmbh.com

PLS-031B-3

Miniature Level Sensor


Lead free

Electrical Characteristics @25°C


Contact form		B
Contact material		Ru
Contact rating max.	W / VA	10
Switching current max.	A	1.0
Carry current max.	A	1.2
Switching voltage max.	VDC	200
	VAC	140
Breakdown voltage min.	VDC	240

Dimensions

in mm

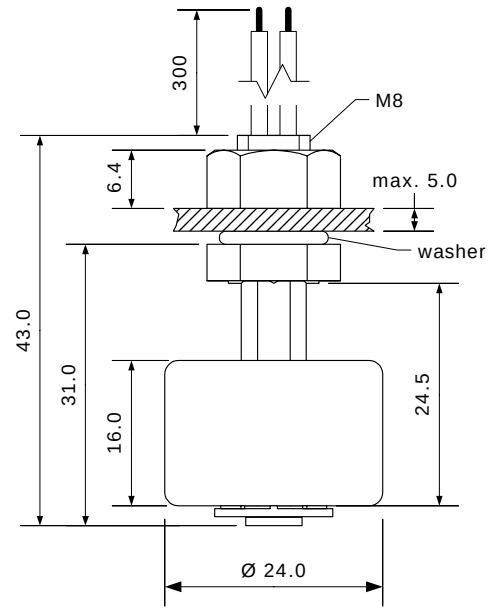

Operating diagram

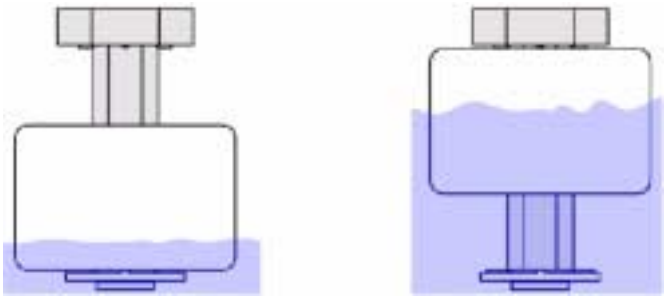

ON OFF

Temperature Range

Operating temperature	°C	-20 to +80
Storage temperature	°C	-30 to +80

PIC GmbH • Nibelungenstr. 5A
90530 Wendelstein, Germany
Phone +49 911 99 59 06-0
Fax +49 911 99 59 06-99
info@pic-gmbh.com • www.pic-gmbh.com

PLS-031B-3
Miniature Level Sensor

Lead free

Material	Use in
Polypropylene (PP)	Water, dilute acids
Polyamide (PA)	Oil, gasoline (petrol), brake fluid

Remarks

- When mounted near ferromagnetic parts switching points may vary

Packing

- Packing unit 10 pcs. per plastic bag, protected accordingly

Customized types available.

© PIC GmbH, Nürnberg (GERMANY)