Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Intellimod™ Module

Three Phase + Brake
IGBT Inverter Output
75 Amperes/600 Volts

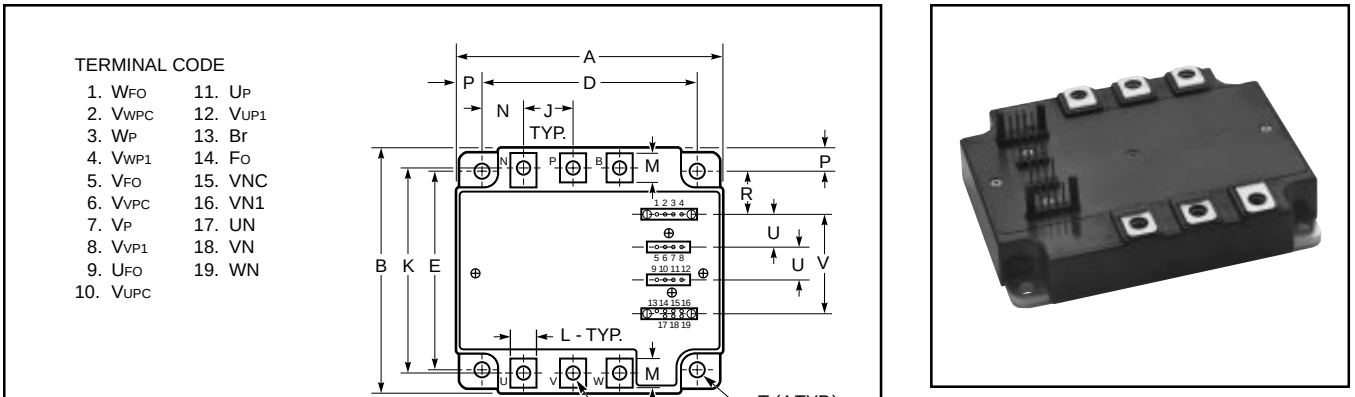

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.33	110.0
B	3.50	89.0
C	0.87 +0.04/-0.02	22.0 +1.0/-0.5
D	3.74±0.010	95.0±0.25
E	2.91±0.010	74.0±0.25
F	0.16	4.0
G	0.87	22.0
H	0.42	10.6
J	0.79	20.0
K	2.99±0.02	76.0±0.5
L	0.39	10.0
M	0.49	12.5
N	0.67	17.0

Dimensions	Inches	Millimeters
P	0.30	7.5
R	0.65	16.5
S	M5 Metric	M5
T	0.22 Dia.	Dia. 5.5
U	0.56±0.010	14.1±0.25
V	1.72±0.012	43.57±0.3
W	0.57±0.012	14.6±0.3
X	2.90	73.7
Y	0.78	19.7
Z	0.10±0.010	2.54±0.25
AA	0.137±0.010	3.49±0.25
BB	0.02 SQ	0.64 SQ
CC	0.12 +0.04/-0.02	3.0 +1.0/-0.5

Description:
Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:
- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
  - – Short Circuit
  - – Over Temperature
  - – Under Voltage

Applications:
- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:
Example: Select the complete part number from the table below -i.e. PM75RVA060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 10)
PM	75	60

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RVA060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Absolute Maximum Ratings, T_j = 25°C unless otherwise specified

Characteristics	Symbol	PM75RVA060	Units
Power Device Junction Temperature	T_j	-20 to 150	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Case Operating Temperature	T_C	-20 to 100	°C
Mounting Torque, M5 Mounting Screws (Typical)	—	17	in-lb
Mounting Torque, M5 Main Terminal Screws (Typical)	—	17	in-lb
Module Weight (Typical)	—	560	Grams
Supply Voltage (Applied between P - N, Surge Value)	$V_{CC(surge)}$	500	Volts
Supply Voltage Protected by SC (V_D = 13.5 ~16.5V, Inverter Part, T_j = 125°C Start)	$V_{CC(prot.)}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz, Sinusoidal	V_{RMS}	2500	Volts

Control Sector

Supply Voltage Applied between (V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}, V_{N1}-V_{NC})	V_D	20	Volts
Input Voltage Applied between (U_P, V_P, W_P, U_N, V_N, W_N, B_r)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between F_O-V_{NC}, $*_{FO}$-V_{*PC})	V_{FO}	20	Volts
Fault Output Current (Sink Current at F_O Terminals)	I_{FO}	20	mA

IGBT Inverter Sector

Collector-Emitter Voltage (V_D = 15V, V_{CIN} = 15V)	V_{CES}	600	Volts
Collector Current, ± (T_C = 25°C)	I_C	75	Amperes
Peak Collector Current, ± (T_C = 25°C)	I_{CP}	150	Amperes
Collector Dissipation (T_C = 25°C)	P_C	284	Watts

Brake Sector

Collector-Emitter Voltage (V_D = 15V, V_{CIN} = 15V)	V_{CES}	600	Volts
Collector Current, ± (T_C = 25°C)	I_C	30	Amperes
Peak Collector Current, ± (T_C = 25°C)	I_{CP}	60	Amperes
Collector Dissipation (T_C = 25°C)	P_C	178	Watts
FWDi Forward Current (T_C = 25°C)	I_F	30	Amperes
FWDi Rated DC Reverse Voltage (T_C = 25°C)	$V_{R(DC)}$	600	Volts

Electrical and Mechanical Characteristics, T_j = 25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Over Current Trip Level Brake Part	OC	-20°C ≤ Tj ≤ 125°C, V_D = 15V	39	—	—	Amperes
Short Circuit Trip Level Inverter Part	SC	-20°C ≤ T_j ≤ 125°C, V_D = 15V	115	—	—	Amperes
Short Circuit Trip Level Brake Part			—	94	—	Amperes
Short Circuit Current Shut-off Time	$t_{off(SC)}$	V_D = 15V	—	10	—	µS
Over Temperature Protection	OT	Trip Level	100	110	120	°C
(V_D = 15V, Lower Arm)	OT_r	Reset Level	85	95	105	°C
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
(-20°C ≤ T_j ≤ 125°C)	UV_r	Reset Level	—	12.5	—	Volts
Circuit Current	I_D	V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}	—	44	60	mA
		V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}	—	13	18	mA
Input ON Threshold Voltage	$V_{CIN(on)}$	Applied between U_P-V_{UPC}, V_P-V_{VPC},	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{CIN (off)}$	W_P-V_{WPC}, U_N, V_N, W_N, Br-V_{NC}	1.7	2.0	2.3	Volts
Fault Output Current	$I_{FO(H)}$	V_D = 15V, V_{FO} = 15V*	—	—	0.01	mA
	$I_{FO(L)}$	V_D = 15V, V_{FO} = 15V*	—	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	V_D = 15V*	1.0	1.8	—	mS

* Fault output is given only when the internal SC, OT, and UV protections circuits of either an upper-arm or a lower-arm device operate to protect it.

Electrical and Mechanical Characteristics, T_j = 25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, V_D = 15V, T_j = 25°C	—	—	1.0	mA
		$V_{CE} = V_{CES}$, V_D = 15V, T_j = 125°C	—	—	10.0	mA
FWDi Forward Voltage	V_{EC}	$-I_C$ = 75A, V_D = 15V, V_{CIN} = 15V	—	2.20	3.30	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, I_C = 75A, Pulsed, T_j = 25°C	—	2.35	2.80	Volts
		V_D = 15V, V_{CIN} = 0V, I_C = 75A, Pulsed, T_j = 125°C	—	2.55	3.05	Volts
Inductive Load Switching Times	t_{on}		0.4	0.8	2.1	µS
(Upper-Lower Arm)	t_{rr}	V_D = 15V, V_{CIN} = 0V ~ 15V	—	0.2	0.3	µS
	$t_{C(on)}$	V_{CC} = 300V, I_C = 75A,	—	0.3	1.1	µS
	t_{off}	T_j = 125°C	—	1.8	2.9	µS
	$t_{C(off)}$		—	0.6	1.2	µS
Brake Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, V_D = 15V, T_j = 25°C	—	—	1.0	mA
		$V_{CE} = V_{CES}$, V_D = 15V, T_j = 125°C	—	—	10.0	mA
FWDi Forward Voltage	V_{FM}	I_F = 30A	—	2.20	3.30	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V_D = 15V, V_{CIN} = 0V, I_C = 30A, Pulsed, T_j = 25°C	—	2.35	2.80	Volts
		V_D = 15V, V_{CIN} = 0V, I_C = 30A, Pulsed, T_j = 125°C	—	2.55	3.05	Volts

PM75RVA060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	—	—	0.44	°C/Watt
	$R_{th(j-c)D}$	Each Inverter FWDi	—	—	1.00	°C/Watt
	$R_{th(j-c)Q}$	Each Brake IGBT	—	—	0.70	°C/Watt
	$R_{th(j-c)D}$	Each Brake FWDi	—	—	1.50	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.027	°C/Watt

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
	$V_{CE(surge)}$	Applied across C-E Terminals	≤ 500	Volts
	V_D	Applied between V_{UP1}-V_{UPC}, V_{N1}-V_{NC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}*	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P, V_P, W_P, U_N, V_N, W_N, B_r	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$		≥ 4.0	Volts
Arm Shoot-Through Blocking Time	t_{DEAD}	For IPM's each Input Signal	≥ 2.5	µS

* With ripple satisfying the following conditions, dv/dt swing ≤ 5V/µs, Variation ≤ 2V peak to peak.

PM75RVA060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Inverter Part

SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

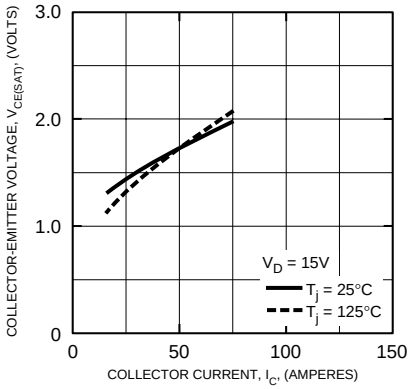

COLLECTOR-EMITTER SATURATON VOLTAGE CHARACTERISTICS (TYPICAL)

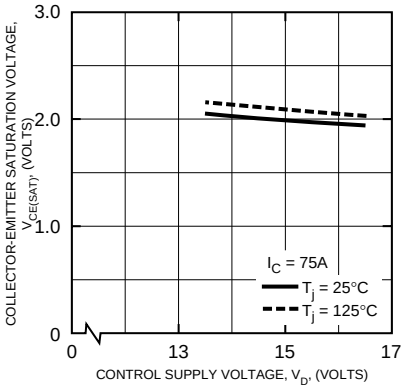

OUTPUT CHARACTERISTICS (TYPICAL)

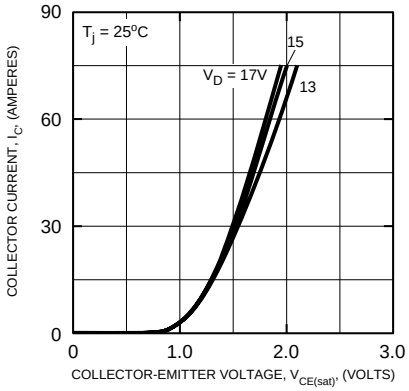

SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

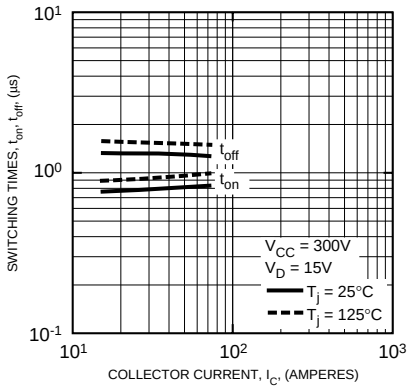

SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

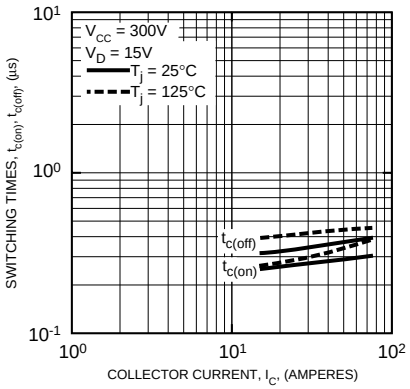

SWITCHING LOSS CHARACTERISTICS (TYPICAL)

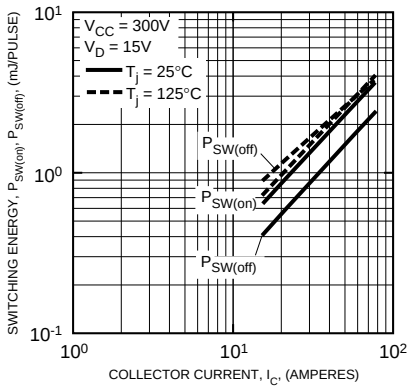

FWDi REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)

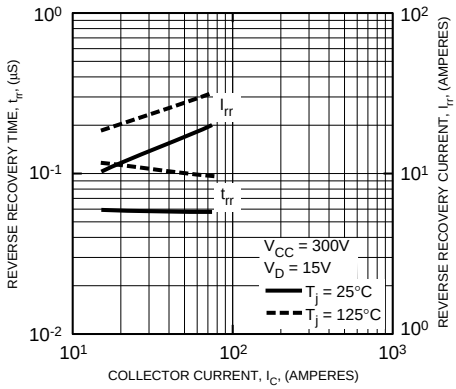

DIODE FORWARD CHARACTERISTICS

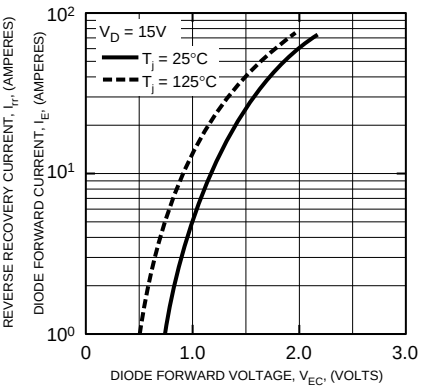

CIRCUIT CURRENT VS. CARRIER FREQUENCY

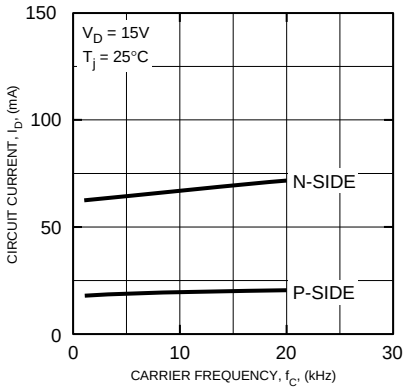

PM75RVA060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Inverter Part

OVER CURRENT TRIP LEVEL VS. SUPPLY VOLTAGE (TYPICAL)

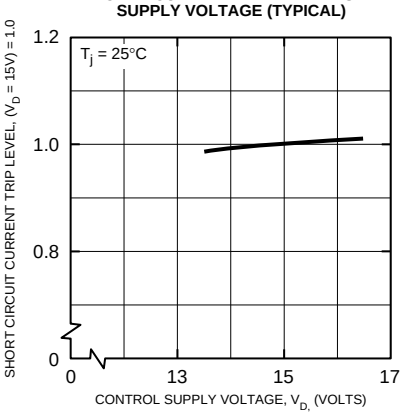

OVER CURRENT TRIP LEVEL TEMPEDANCE DEPENDENCY (TYPICAL)

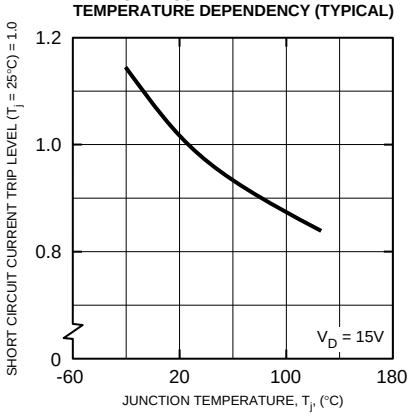

FAULT OUTPUT PULSE WIDTH VS. TEMPERATURE (TYPICAL)

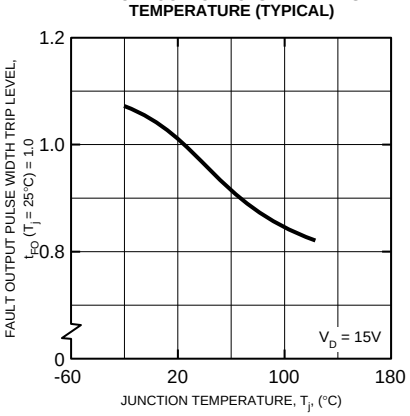

CONTROL SUPPLY VOLTAGE TRIP-RESET LEVEL TEMPERATURE DEPENDENCY (TYPICAL)

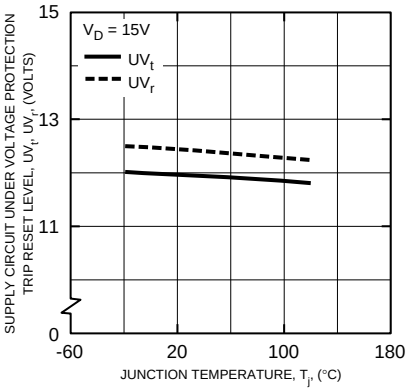

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

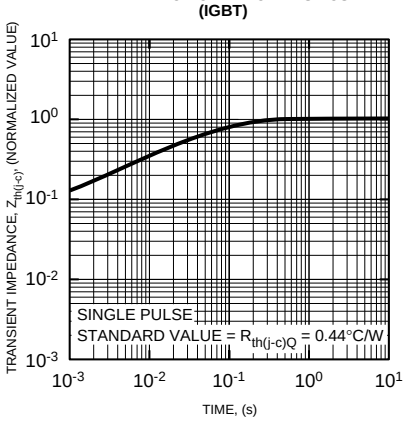

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)

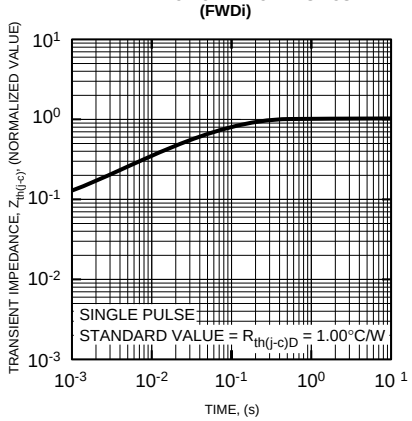

PM75RVA060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Brake Part

SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

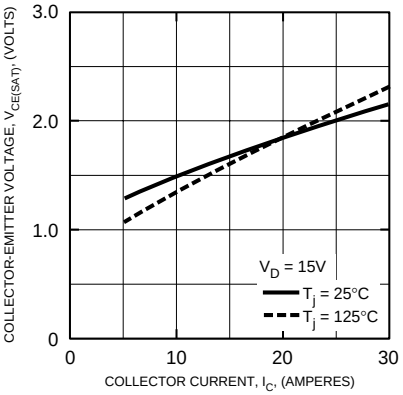

COLLECTOR-EMITTER SATURATON VOLTAGE CHARACTERISTICS (TYPICAL)

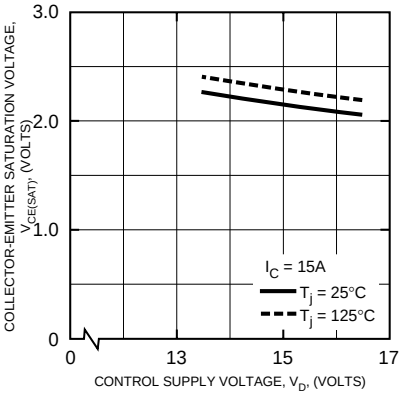

OUTPUT CHARACTERISTICS (TYPICAL)

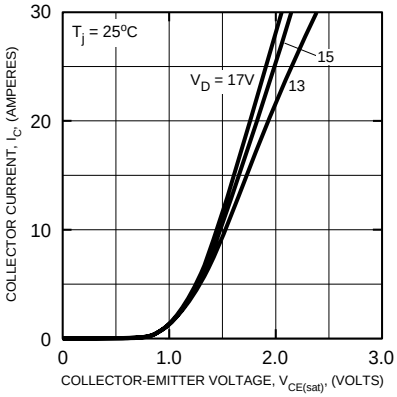

DIODE FORWARD CHARACTERISTICS

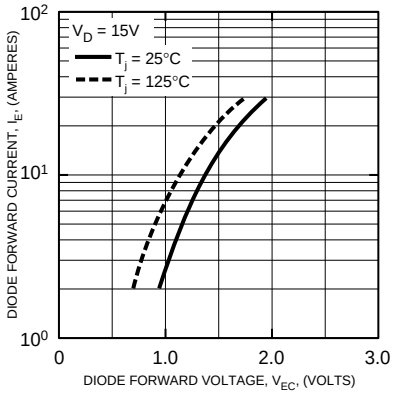

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

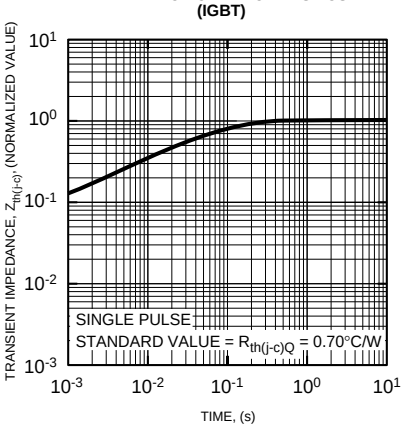

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)

