



SMT Package

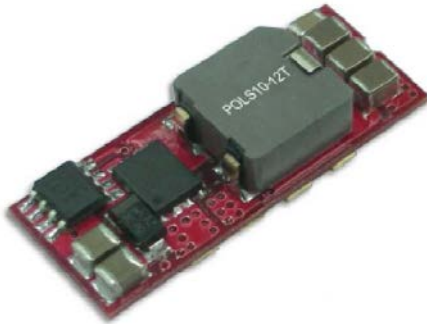


Size: 1.30in x 0.53in x 0.30in

Vertical SIP Package

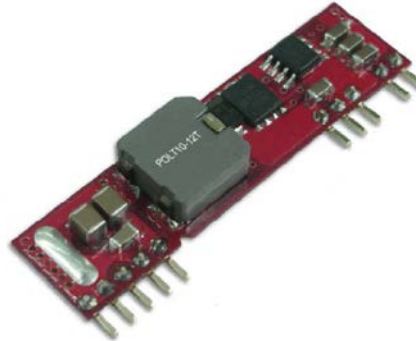

Size: 2.00in x 0.50in x 0.28in

Horizontal SIP Package

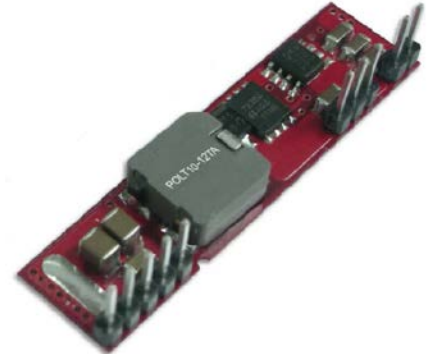

Size: 2.00in x 0.50in x 0.28in

OPTIONS

- SMD or SIP Package
- Vertical or Horizontal Option Available for SIP Package
- Remote Control: Positive or Negative Logic

APPLICATIONS

- Wireless Network
- Telecom/Datacom
- Industry Control System
- Distributed Power Architectures
- Semiconductor Equipment
- Microprocessor Power Applications

FEATURES

- High Efficiency of 93%
- SMD and SIP Packages Available
- Small Size and Low Profile
- No Minimum Load Required
- SMD Package Qualified for Lead Free Reflow Solder Process According IPC J-STD-020D
- RoHS II & REACH Compliant
- CE Marked
- Over Load, Over Temperature, and Short Circuit Protection
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals

DESCRIPTION

The POL10-12T series of DC/DC open frame power supplies offers a 10A output current rating in a small size and low profile package. This series consists of single output models with and input voltage range of 8.3~14VDC or 8.3~13.2VDC. Several options are available for this series including remote control positive or negative logic and SMD or SIP package. Each model is RoHS II & REACH compliant, CE marked, and has over load, over temperature, and short circuit protection. This series has UL60950-1, EN60950-1, and IEC60950-1 safety approvals.

MODEL SELECTION TABLE

Model Number	Input Voltage Range	Output Voltage	Output Current @Full Load	No Load Input Current 0.75VDC/5.0VDC	Package Type	Maximum Capacitive Load ⁽¹⁾	Efficiency ⁽²⁾	Remote ON/OFF
POLS10-12T	Vout≤3.63 Vin=8.3~14VDC	0.75~5VDC	10A	40/100	SMD	1000/5000μF	93%	Negative
POLS10-12T-P								Positive
POLT10-12T	Vout>3.63 Vin=8.3~13.2	0.75~5VDC	10A	40/100	Vertical SIP	1000/5000μF	93%	Negative
POLT10-12T-P								Positive
POLT10-12TA		0.75~5VDC	10A	40/100	Horizontal SIP	1000/5000μF	93%	Negative
POLT10-12TA-P								Positive

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.


SPECIFICATION		TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS							
Input Voltage Range	Vout(set) ≤ 3.63VDC	8.3	12	14	VDC		
	Vout(set) > 3.63VDC	8.3	12	13.2			
Maximum Input Current	Vin=8.3 to 14VDC, Io=Io(max.)		7		A		
Input Reflected Ripple Current	5~20MHz, 1μH Source Impedance		20		mAp-p		
Start-Up Voltage			7.9		VDC		
Shutdown Voltage			7.8		VDC		
Input Filter ⁽³⁾		Capacitor Type					
OUTPUT SPECIFICATIONS							
Output Voltage		See Table					
Voltage Accuracy	% of Vout(set)	-2.0		+2.0	%		
Line Regulation	Vin=Vin(min.) to Vin(max.) at Full Load; % of Vout(set)	-3.0		+3.0	%		
Load Regulation	No Load to Full Load; % of Vout	-0.4		+0.4	%		
Voltage Adjustability ⁽⁴⁾		0.7525		5	VDC		
Remote Sense				0.5	VDC		
Output Current		See Table					
Maximum Capacitive Load		See Table					
Ripple & Noise (20MHz bandwidth)	Measured by 20MHz BW, with a 1μF MLCC & a 10μF T/C		200		mV		
			25		μs		
Dynamic Load Response	With a 1μF MLCC & a 10μF T/C ΔIo/Δt=2.5A/μs, Vin(nom) Peak Deviation 50% load step change Setting Time(Vout<10% Peak Deviation)		200		mV		
			25		μs		
Dynamic Load Response	With 2pcs of 150μF polymer capacitors ΔIo/Δt=2.5A/μs, Vin(nom) Peak Deviation 50% load step change Setting Time (Vout<10% Peak Deviation)		100		mV		
			25		μs		
Temperature Coefficient		-0.4		+0.4	%/°C		
Rise Time	Time for Vout to rise from 10% to 90% of Vout(set)			6	ms		
Output Voltage Overshoot-Startup	Vin=Vin(min.) to Vin(max.) at Full Load; % of Vout(set)		1.0		%		
REMOTE ON/OFF CONTROL ⁽⁵⁾⁽⁶⁾							
Negative Logic (Standard)	DC-DC ON	Open or 0~0.3VDC					
	DC-DC OFF	2.5VDC~Vin(max.)					
Positive Logic (Option)	DC-DC ON	Open or (Vin-4)~Vin(max.)					
	DC-DC OFF	0~0.3VDC					
Input Current of CTRL Pin		0.01		1.0	mA		
Remote OFF Input Current			2.0		mA		
PROTECTION							
Short Circuit Protection		Continuous, Automatic Recovery					
Over Load Protection	% of Iout Rated		200		%		
Over Temperature Protection			125		°C		
ENVIRONMENTAL SPECIFICATIONS							
Operating Case Temperature	With Derating	-40		+85	°C		
Storage Temperature		-55		+125	°C		
Relative Humidity		5		95	%RH		
Thermal Shock		MIL-STD-810F					
Vibration		MIL-STD-810F					
MTBF	MIL-HDBK-217F, Full Load	3,355,000			Hours		
GENERAL SPECIFICATIONS							
Efficiency		See Table					
Switching Frequency		270	300	330	kHz		
PHYSICAL SPECIFICATIONS							
Weight		0.21oz (6.0g)					
Dimensions (L x W x H)	SMT Package	1.30in x 0.53in x 0.30in (33mm x 13.5mm x 7.6mm)					
	SIP Package	2.00in x 0.50in x 0.28in (50.8mm x 12.7mm x 7.2mm)					
SAFETY CHARACTERISTICS							
Safety Approvals	UL60950-1, EN60950-1, IEC60950-1						
Lead-Free Reflow Solder Process	IPC J-STD-020D						
Moisture Sensitivity Level (MSL)	IPC J-STD-033B, Level 2a						

NOTES

1. Efficiency Vin(nom), 3.3VDC
2. Test by minimum input and constant resistive load. ESR $\geq$ 1m Ω / ESR $\geq$ 10m Ω
3. It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensure module stability. The external Cin is 4pcs of 47 μ F ceramic capacitors at least.
4. Output voltage is programmable from 0.7525V to 5V by connecting a single resistor (shown as Trim Table) between the Trim and GND pins of the module. To calculate the value of the resistor Rtrim for a particular output voltage Vout, use the following equation.

$$R_{trim} = \left[\frac{10500}{V_{out} - 0.7525} - 1000 \right] \Omega$$

Trim Figure

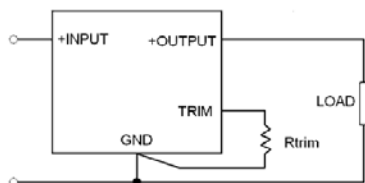

Trim Table


Vout(set) (VDC)	Rtrim (k Ω)
0.7525	Open
1.2	22.46
1.5	13.05
1.8	9.024
2.5	5.009
3.3	3.122
5	1.472

5. Remote On/Off Referred to -Vin pin
6. Positive Logic: ON/OFF is open collector/drain logic input
Negative Logic: ON/OFF is open collector/drain logic input with external pull -up resistor


**Due to advances in technology, specifications subject to change without notice.*

DERATING CURVES


POL10-12T, Vout=3.3V Derating Curve

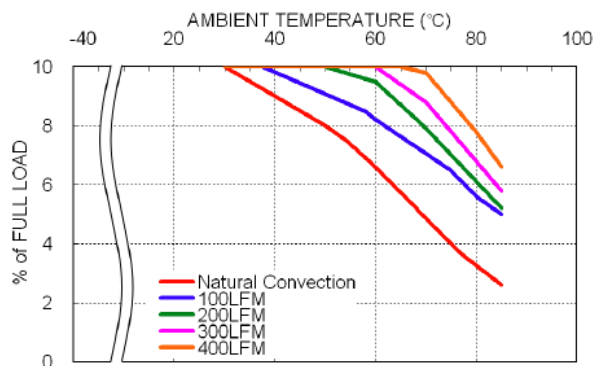

POL10-12T, Vout=3.3V Efficiency vs. Input Voltage

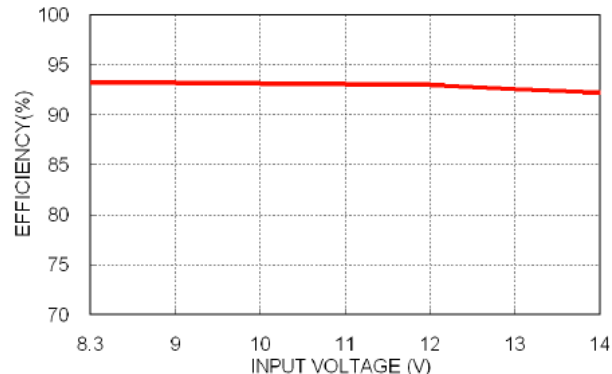


POL10-12T, Vout=3.3V Efficiency vs. Output Load

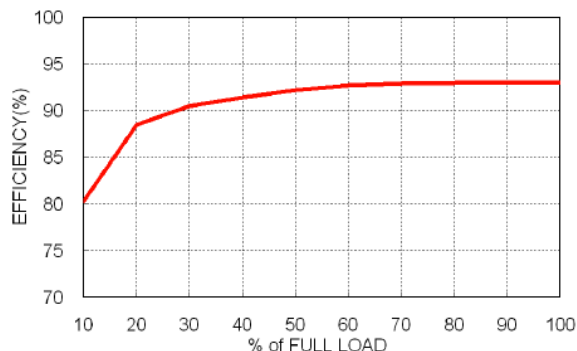

MECHANICAL DRAWINGS


POLS10-12T

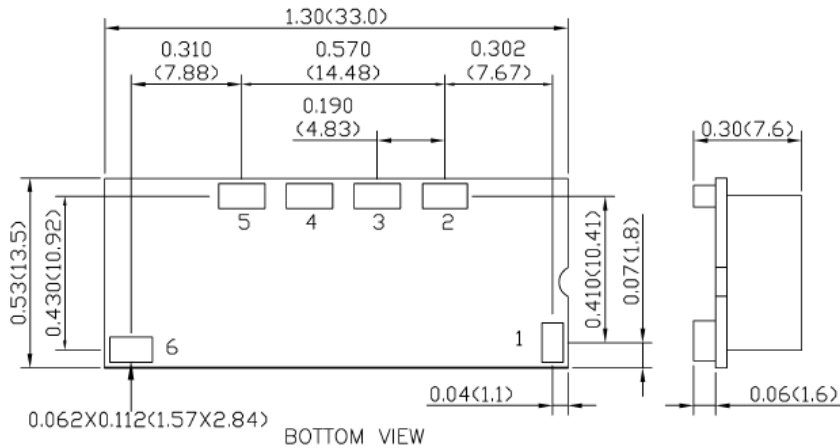

PIN CONNECTION

PIN	DEFINE
1	Ctrl
2	+Sense
3	Trim
4	+Vout
5	GND
6	+Vin


POLT10-12T

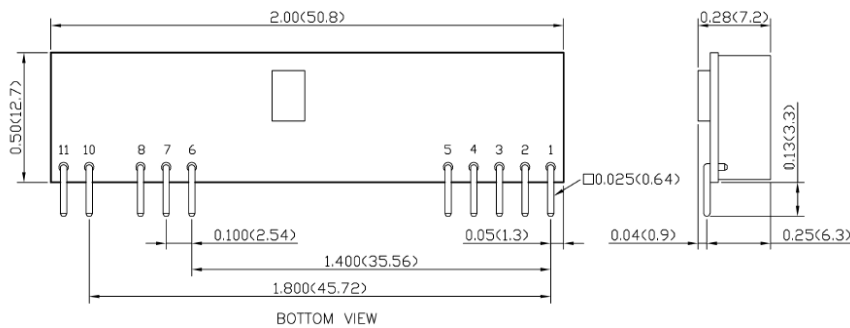

PIN CONNECTION

PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

POLT-12TA

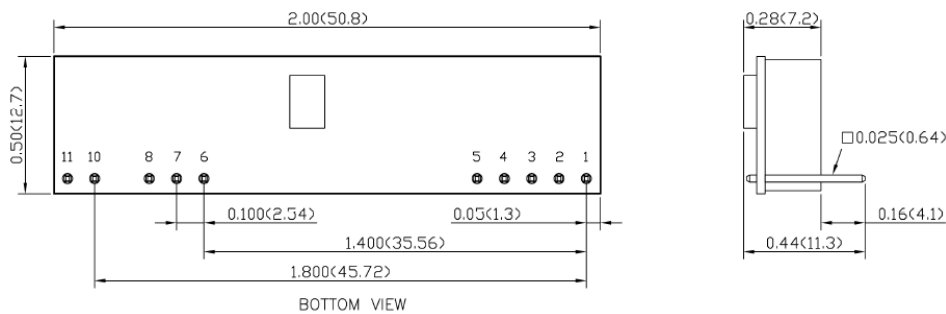

PIN CONNECTION

PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

Notes:

All dimensions in inch (mm)

Tolerance: x.xx±0.02 (x.x±0.5)

x.xxx±0.01 (x.xx±0.25)

Pin Pitch Tolerance ±0.01 (0.25)

Pin Dimension Tolerance ±0.004(0.1)

MODEL NUMBER SETUP

POLT	10	-	12	T	-	P
Series Name	Output Current		Input Voltage	Package		Remote On/Off Option
POLT: SMD Type POLS: SIP Type			12: 8.3~14VDC	T: No Assembly (SMD Type) T: Vertical Mounting (SIP Type) TA: Horizontal Mounting (SIP Type)		None: Negative Logic P: Positive Logic

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
Toll Free: ☎(888)597-9255
Fax: ☎(603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833