

RESPECTIVE END ORIENTATIONS

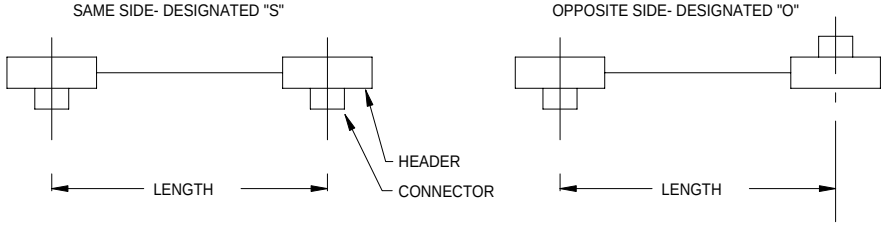

CONNECTOR ORIENTATION WITH RESPECT TO CABLE

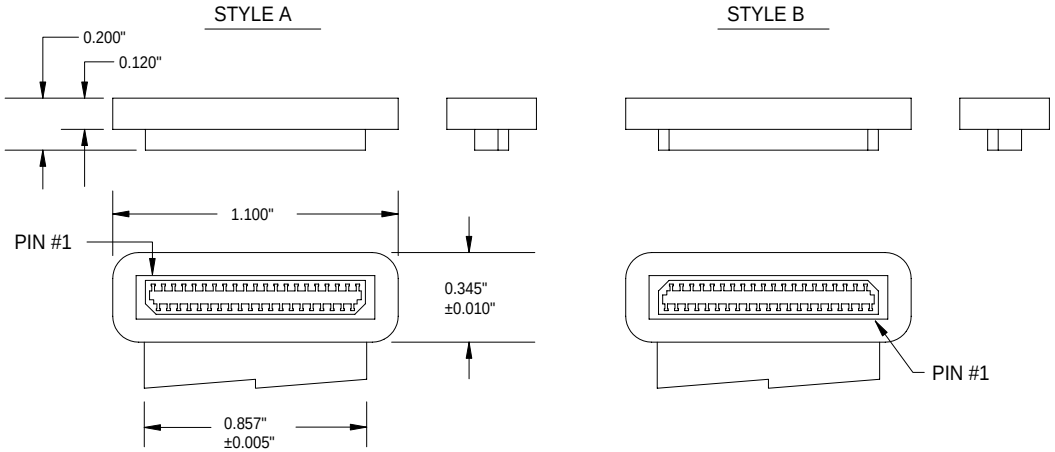


NOTES

1) INSULATION: 0.002" THICK POLYESTER
2) CONDUCTORS: 0.003" X 0.011" (39 PLACES)
   0.003" X 0.026" (2 PLACES, OUTER)
3) HEADER MATERIAL: DUPONT 612 NYLON
4) CONNECTOR: HIROSE P/N DF9C-41S-1V
5) CABLE RATING: AWM STYLE 20890 105°C, 90V, VW-1
6) CABLE THICKNESS= 0.010"±0.002"
7) CABLE WIDTH= 0.857"±0.005"

PROPRIETARY INFORMATION NOTICE

This document and the designs, specifications, and engineering information disclosed herein are the property of Parlex Corp., and are not to be disseminated or reproduced without expressed written consent. This document is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this document, the recipient agrees to keep it and the matter disclosed hereon in confidence and not to use or permit their use in any way detrimental to Parlex Corp.

CREATING A PART NUMBER



i.e. PS564AA0254O B

EXAMPLE GIVEN INDICATES A 41 POS. CABLE ASSEMBLY TERMINATED WITH HIROSE CONNECTORS (P/N DF9C-41S-1V) IN WHICH PIN #1 TRACES TO PIN #1, ASSEMBLY IS 10.000" IN LENGTH, AND CONNECTORS ARE ON OPPOSITE SIDES OF CABLE AS DEFINED AT LEFT.

P ARLEX CORPORATION
One Parlex Place
Methuen, Ma 01844

LAMINATED CABLE DIVISION

END DETAILS FOR TERMINATING CABLE WITH 41 POS. S/M HIROSE CONNECTORS

SIZE	FSCM		REV
B	18377	PS-564	B
SCALE 2:1		SHEET 1 OF 1	